



产品总目录 The Portfolio

 **SPERIAN**
Protection you can trust

订购热线：400-600-7758
网 站：www.myehs.cn

巴固经销商

订购热线：400-600-7758 网站：www.myehs.cn





听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

听力防护系列

Hearing Protection

03	发泡耳塞	Disposable Foam Earplugs
04	头箍式耳塞	Banded Earplugs
05	可重复使用耳塞	Reusable Earplugs
06	耳塞分配器	Earplugs Dispensers
07	Leightning 耳罩系列	Leightning Earmuffs
10	Thunder 耳罩系列	Thunder Earmuffs
11	Mach 耳罩系列	Mach Earmuffs
12	Clarity 耳罩系列	Clarity Earmuffs
14	Viking 耳罩系列	Viking Earmuffs

手部防护系列

Protective Gloves

73	防机械类伤害	Mechanical Hazards Resistance
75	防割伤伤害	Cut Resistance
77	电绝缘手套	Electrosoft
78	防化学类伤害	Chemical Resistance
79	耐高温及焊接类应用	Heat Resistance and Welding Application
82	防冻伤害	Cold Resistance

防护服系列

Protective Clothing

85	避火隔热服	Fire Protective Clothing
87	隔热服	Heat Resistant Clothing
89	核污染防护服	Nuclear Protective Clothing
90	重型防化服	Heavy Chemical Protective Clothing
91	轻型防化服	Light Chemical Protective Clothing



眼脸部防护系列

Eye & Face Protection

17	防护眼镜	Spectacles
21	护目镜	Goggles
22	防护屏	Faceshield / Visors
24	洗眼器	Eyewash
26	眼镜清洁套装	Clean Kits
27	自动变光焊接面罩	Auto Darkening Filter Helmet
28	传统型焊接面罩及焊接护目镜	Passive Welding Helmet & Goggles

足部防护系列

Foot Protection

95	工业用安全鞋	Industry Safety Shoes
97	安全防护靴	Safety Boots

坠落防护系列

Fall Protection

101	工业用安全带	Harnesses for Industrial Applications
104	特殊用途安全带	Harnesses for Special Applications
105	系绳(带)	Lanyards
109	坠落制动器	Fall Arrest Blocks
115	绳索和钢缆抓绳器	Rope and Wire Fall Arresters
117	连接件和附件	Connectors
119	焊接类坠落防护产品	Welding Fall Protection Products
120	救援产品	Rescue Equipment
121	高空防坠落系统	Fall Protection System

呼吸防护系列

Respiratory Protection

31	口罩	Disposable Mask
33	半面罩	Reusable Half Mask
36	全面罩	Reusable Full Face Mask
39	正压式空气呼吸器	SCBA
51	正压式供气呼吸防护系统	Supplied Air Equipment

气检测仪系列

Instrumentation

55	单一气体检测仪	Single-Sensor Gas Monitors
59	多气体检测仪	Multi-Sensor Gas Monitors
67	SCBA 自动综合检测仪	SCBA Performance Tester

订购热线: 400-600-7758
网 站: www.myehs.cn



安全舒适



以人为本

斯博瑞安集团是2001年由世界两大个人防护产品巨头--Bacou公司和 Christian Dalloz 公司，合并而成。凭借五十多年的行业经验以及合并后的发展，集团已成为全球最大、最专业的研发、生产、销售全系列

个人防护产品的跨国公司，并在全球13个国家拥有32家工厂，客户遍布五大洲，2007年全球销售额达7.54亿欧元，研发费用1260万欧元，全球员工近6000人。

订购热线：400-600-7758
网 站：www.myehs.cn



值得信赖



全球领先

斯博瑞安（中国）安全防护设备有限公司借助集团雄厚的产品发展实力和技术支持，在中国个人防护产品领域独占鳌头。斯博瑞安集团在华子公司成立于1996年，在北京、上海、深圳三地拥有3个销售办事处，在上海松江工业区拥有占地4500平方米的工业基地，包括数条生产呼吸、坠落、听力、气检仪、

眼镜等个人防护产品的生产线、一个用于检测个人防护产品的实验室、一个可在户内和户外开展培训课程的客户培训中心以及面积达2000平方米的仓库。2000年12月公司顺利通过了ISO9001:2000质量体系认证工作。

订购热线：400-600-7758
网 站：www.myehs.cn



> > > 订购热线: 400-600-7758 网站: www.myehs.cn


发泡耳塞	Disposable Foam Earplugs	03
头箍式耳塞	Banded Earplugs	04
可重复使用耳塞	Reusable Earplugs	05
耳塞分配器	Earplugs Dispensers	06
Leightning 耳罩系列	Leightning Earmuffs	07
Thunder 耳罩系列	Thunder Earmuffs	10
Mach 耳罩系列	Mach Earmuffs	11
Clarity 耳罩系列	Clarity Earmuffs	12
Viking 耳罩系列	Viking Earmuffs,	14

为您的员工选择一款正确的听力防护产品，而不是一款NRR值最高的产品。

适合

为每个不同的耳道找到不同形状和尺寸的产品并不是那么困难。一个适合的耳塞应该在保持应有的防护的同时让佩戴者的耳道感到舒适。

Sperian 耳塞因其先进的设计和材料科技为每一个作业者提供最适当的防护。



CMT是一种用户友好技术
SmartFit 耳塞可以根据人体自身的温度调节大小以适合佩戴者的耳道。



聚氨酯发泡耳塞
我们专利技术的开空式聚氨酯材料在一次性发泡耳塞的应用使其在不降低防护效率的同时又能佩戴舒适。

选择

为什么有这么多的耳塞？因为人和人所处的环境都非常的的不同。Sperian 提供了最全的产品选择去适应任何一种环境。



不同形状
为了给每一个耳朵提供适合的耳塞，Sperian 提供了多种多样的耳塞形状供不同的佩戴者选择。



带线选择
在很多工作环境，工作者需要在工作的時候取下耳塞。带线耳塞的设计让摘取和佩戴耳塞变成十分容易。

防护

听力防护产品只有在人们使用它的时候才有用。Sperian 提供了一系列不同 NNR 值耳塞产品，在不损害员工安全的同时提供听力防护。

标准

- EN 352/1 头箍
- EN 352/2 耳塞
- EN 352/3 装在头盔上的头箍
- EN 352/4 电子头箍
- EN 458 选择、使用、听力防护装备使用注意事项和维护等建议的指导资料


雇主的职责

	恒定噪音	波动噪音
雇员应佩戴听力防护装备	85dB*	137dB
雇员应配备听力防护装备	80dB	135dB

2003年2月15日欧盟政府公报上发表的欧洲指令 2003/10/EC

*dB: 分贝

声音强度水平标

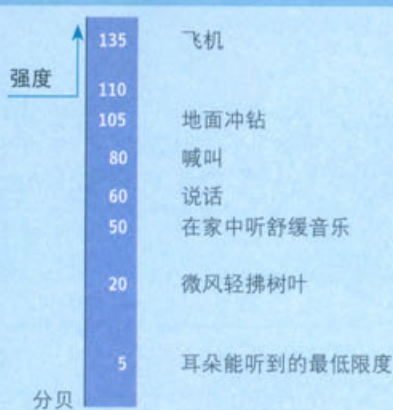

同时提供带线及不带线两种型号

听力防护系列
Hearing Protection

最高防护的一次性发泡耳塞
Highest NRR in Disposable
Foam Earplug

NRR33



钟型

订货号: MAX-30 带线
MAX-1 不带线

Max[®]

- 全球使用最广的PU发泡耳塞
- 钟型设计, 保证了佩戴的舒适度
- 改进设计, 佩戴更加方便, 并且不易脱落
- 光滑的耳塞表面, 抗油性的设计, 可防止污垢累积
- The world's most-used polyurethane earplug
- Bell shape delivers maximum in-ear comfort
- Improved design, easier to insert, reduces tendency to back out of ear
- Smooth, soil-resistant skin prevents dirt build-up

Max[®]

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	40.9	43.0	44.8	38.9	37.2	47.4	48.5	47.7	47.8
标准偏差(分贝) Std. Dev.(dB)	3.5	3.9	3.8	2.8	2.7	4.5	3.1	4.4	3.9

舒适, 小号设计
Comfort for Smaller wearers

NRR30



T型

订货号: BC-LPF30 带线
BC-LPF1 不带线

Max-Lite[®]

- 适合个子稍小的人群使用
- 低压发泡设计, 佩戴非常舒适, 适合长久佩戴
- T型结构设计, 佩戴及把握更加方便
- Comfort for smaller wearers, Ideal size for female workers
- Low pressure foam expands gently for comfortable long-term wear
- Contoured T-shape for easy handling and wear

Max-Lite[®]

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	33.5	33.6	36.0	37.5	39.4	42.5	43.9	43.7	45.2
标准偏差(分贝) Std. Dev.(dB)	3.6	3.4	3.2	3.5	3.5	3.4	5.1	4.8	5.1

鲜明的颜色设计
The bright idea in protection

NRR32



T型

订货号: LL-30 带线
LL-1 不带线

Laser Lite[®]

- 鲜明的耳塞颜色, 使佩戴的耳塞更易察觉, 同时增加佩戴乐趣
- 柔软的耳塞能自动调整, 使耳塞更加贴合耳道, 佩戴非常舒适
- T型耳塞设计, 使佩戴和摘取更加简便
- Vibrant colors make protection visible and fun
- Self-adjusting foam expands to fit virtually every wearer
- Contoured T-shape for easy insertion and wear

Laser Lite[®]

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	36.8	38.0	40.4	41.1	40.1	44.4	48.5	46.4	45.8
标准偏差(分贝) Std. Dev.(dB)	4	4.5	5.5	4	2.7	4.5	4.1	5.4	5.2

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

无需揉搓便可方便佩戴
No-roll design makes
insertion fast and easy

NRR23



圆柱型

订货号: MTX-30-OR 带线
MTX-1-OR 不带线

Matrix™

- 专利注册, 无需揉搓便可方便佩戴
- 光滑表面设计, 缩小耳塞直径, 以配合长时间佩戴
- 快速的插入耳道便可提供优异的防护效果, 无需等耳塞发泡弹起
- 独特的降噪效果, 在优异的噪声阻隔同时, 更可自然的听到人声沟通的声音
- 三种不同的款式提供不同等级的防护
- No-roll insertion
- Patented insert design makes insertion fast and easy
- Smooth out skin and reduced diameter provide long term comfort
- Instant protection and upon proper insertion - no need to wait for foam to expand
- Uniform attenuation profile blocks out noises while voice frequencies can be heard more naturally

Matrix™

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)	31.4	34.3	38.3	34.5	36.0	40.3	39.2	40.9	44
标准偏差 (分贝) Std. Dev.(dB)	3.6	4	3.9	3.0	2.7	3.4	3.1	3.5	3.4

全力实现个性化的舒适度和高性能
Energized for personal
comfort and performance

NRR29



订货号: 1005574 不带线
1000107 带线

Bilsom 303

- 由于引进Leight Stripe技术, Bilsom 303独特的发泡棉配方带给您最佳的耳部舒适度和可见度。
- 高衰减适合中等/严重的嘈杂环境。
- 发泡棉配方设计, 易于捏小和正确插入。
- 在耳道中逐渐膨胀, 较少的膨胀压力可产生更加舒适的密封。
- Bilsom 303's unique foam formulation delivers both in-ear comfort and visibility with the introduction of the Leight Stripe.
- High attenuation, ideal for medium/high noise environment formulation easy to roll-down and insert properly
- Expands gently in the ear canal, less expansion pressure creates a more comfortable seal

Bilsom 303

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)	34.4	35	36.2	35.9	36.4	38.9	39.8	42.6	43
标准偏差 (分贝) Std. Dev.(dB)	3.4	4.2	3.8	3.0	2.9	3.0	3.2	4.2	4.1

头箍式耳塞 Banded Earplug

耳塞为柔软泡沫材质, 衰减音量而不深入耳道

Super soft pads rest outside the ear for outstanding comfort

NRR23



帽型

QB3®HYG

订货号: QB3HYG
QB300 耳塞头替换包

QB3® HYG

- 非常柔软的耳塞头是佩戴更为舒适
- 轻质设计, 携带方便
- Super soft pads rest outside the ear for outstanding comfort
- Patented band design prevents ear pads from touching dirty or contaminated surfaces
- Lightweight and portable - designed especially for environments with intermittent noise hazards

Under-the-Chin

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)	26.9	26.0	24.1	26.0	34.4	40.7	40.3	43.3	42.4
标准偏差 (分贝) Std. Dev.(dB)	1.8	2.2	2.4	2.1	1.7	1.5	2.3	2.1	1.7

耳塞为柔软泡沫材质, 衰减音量而不深入耳道

Super soft pads rest outside the ear for outstanding comfort

听力防护系列
Hearing Protection

眼脸面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

可重复使用耳塞 Reusable Earplugs

听力防护系列
Hearing Protection

管体柔软, 佩戴快速方便
Patented "no-roll" design for
easy handling and comfortable fit

NRR26



订货号: BC-QD30 带线



钟型

Quiet®

Quiet®

- 光滑低过敏表面
- 中心坚硬, 便于耳塞插入
- 可清洗, 反复使用
- Contoured shape comfortably matches contours of the ear canal
- Built-in insertion stem

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	26.3	29.0	28.7	31.2	363.3	44.0	45.1	49.1	47.2
标准偏差(分贝) Std. Dev.(dB)	3.3	2.6	2.8	2.5	3.9	3.6	4.4	4.4	3.7

优异的防护, 佩戴舒适
Total protection, Comfort and fit

NRR27



订货号: FUS30 大号 带线

FUS30S 小号 带线 绿 green



圣诞树型

Fusion®

Fusion®

- SoftFlange™ 柔软围翼, 佩戴舒适, 且具备优良隔声效果
- 独特设计可拆卸式耳塞绳
- 奉送HearPack® 耳塞盒
- 两种尺寸提供最佳佩戴选择
- SoftFlange™ design for comfort and fit
- Unique detachable cord system
- HearPack® storage case
- available in two sizes to ensure a proper and comfortable fit

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	29.5	29.9	32.3	33.9	37.3	41.1	42.7	47.9	47.6
标准偏差(分贝) Std. Dev.(dB)	4.6	3.7	2.8	2.8	4.1	3.6	4.6	4.8	3.2

个性化耳塞的一次革命
Revolution in personalized fit

NRR 25



订货号: SMF-30 带线



圣诞树型

SmartFit®

SmartFit®

- 高端材料, 利用佩戴者体温逐渐改变耳塞外形, 直至完美贴合耳道
- 佩戴极其舒适, 是真正的个性化耳塞
- 独特设计及材料使该产品使用于大多数工作环境
- HearPack®储存盒, 独一无二的可分离式耳塞绳

The ultra-smart choice for today's diverse workplace. Ears are like people – each one unique and different. That's what makes SmartFit such a marvel of user-friendly design. The only multiple-use earplug with Conforming Material Technology™, SmartFit uses body heat to adapt to the shape of the ear canal for a comfortable, personalized fit. With a detachable cord system, HearPack® carry case and special application styles available, it's the ultra-smart choice for today's diverse workplace.

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减(分贝) Mean Attn.(dB)	29.5	28	30.5	31.6	33.5	40.5	40.0	41.8	42.1
标准偏差(分贝) Std. Dev.(dB)	3.5	4.1	3.6	3.2	3.5	3.3	4.2	5.3	4.7

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

耳塞分配器 Earplugs Dispensers

听力防护系列
Hearing Protection

眼部及面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



订货号 Ref.: LS-400

LS 400 经济型轻质耳塞分配器 LS 400 Leight® Source Dispenser

- 产品选用坚硬的耐用塑料制成, 轻便经济设计
- 产品除了可以挂在墙上外同时也可放在桌面, 使用更加便利
- 旋转耳塞分配旋钮, 单手操作, 使用方便
- 配有接盘, 可以防止耳塞掉落地面
- 每次可添加400副耳塞

New Versatile Earplug Dispenser

- Durable plastic design an economical choice for dispensing earplugs
- Mounts to wall or stands as table-top dispenser with balanced footing
- Twist knob to dispense earplugs
- Catch basin prevents earplugs from falling to the ground
- Holds 400 pairs of earplugs



订货号 Ref.: LS-500

LS 500 耐用型金属耳塞分配器 LS 500 Leight® Source Dispenser

- 使用全铝结构设计制造, 镀以颜色, 适合长久使用。
- 可固定在墙上, 方便使用
- 摇柄式耳塞分配设计, 使用简便
- 每次可使用内涵500副耳塞的填充盒

Permanent Hearing Protection Source

- Heavy-duty anodized aluminum construction withstands constant use
- Mount on wall for easy access
- Crank handle to dispense earplugs
- Ideal for large factories and process industries that have zero tolerance for packaging waste
- Holds 500 pair of earplugs

可选项	耳塞描述	耳塞描述	订货号	包装
LS-400	Max	耳塞填充包, 内含散装 200 副 MAX 一次型耳塞	MAX-LS4	200 副/包, 10 包/箱
	Laser Lite	耳塞填充包, 内含散装 200 副 Laser Lite 一次型耳塞	LL-LS4	200 副/包, 10 包/箱
	Bilsom 303	耳塞填充包, 内含散装 200 副 Bilsom 303 一次型耳塞	10 061 87	200 副/盒, 10 包/箱
LS-500	Max	耳塞填充盒, 内含散装 500 副 MAX 可重复使用耳塞	MAX-1-D	500 副/盒, 4 盒/箱
	Max Lite	耳塞填充盒, 内含散装 500 副 MAX Lite 可重复使用耳塞	LPF-1-D	500 副/盒, 4 盒/箱
	Matrix	耳塞填充盒, 内含散装 500 副 Matrix 可重复使用耳塞	MTX-1-OR-D	500 副/盒, 4 盒/箱
	Bilsom 303	耳塞填充盒, 内含散装 500 副 Bilsom 303 一可重复使用耳塞	10 175 74	500 副/盒, 4 盒/箱

最大的舒适度和保护效果AFC技术设计
 With Air Flow Control™ technology

- 坚固的金属环头箍结构，经得起高环境要求的考验
- 专利的空气控制技术提供了最优的声音衰减效果
- 单元式的耳罩垫更换快捷方便
- 多种声音衰减值可选
- Robust steel wire construction withstands demanding use, especially in tough environments
- Feature patented Air Flow Control technology for optimal attenuation
- Snap-in ear cushions make replacement quick and easy
- Multiple attenuation allow for targeted attenuation for a variety of applications

L3



头带型 Headband – L1,L2,L3

- 柔软舒适。内附海绵的头带，长久佩戴更加舒适
- 可伸缩调节高度同时又确保在使用时能很好的固定
- padded foam headband delivers superb comfort with minimum pressure on the head
- telescopic height adjustment remains fixed during use

订货号 Ref. 10 109 24 L3 30 NRR
 * 10 109 23 L2 27 NRR
 10 109 22 L1 25 NRR

Leightning® L1		NRR 25									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		19.7	23.8	29.0	31.3	32.1	37.8	39.2	39.5	39.5	
标准偏差 (分贝) Std. Dev.(dB)		2.6	2.9	2.6	2.5	2.4	3.1	2.0	2.3	2.4	
Leightning® L2		NRR 27									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		21.8	26.6	31.8	35.2	32.9	37.7	37.6	39.1	39.6	
标准偏差 (分贝) Std. Dev.(dB)		3.2	3.1	2.5	2.1	2.1	2.4	2.2	2.4	2.6	
Leightning® L3		NRR 30									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		23.8	28.8	36.5	39.9	35.3	38.7	39.0	41.0	40.8	
标准偏差 (分贝) Std. Dev.(dB)		2.2	2.3	2.4	1.9	2.3	2.8	2.1	2.4	2.3	

L3H



配帽型 Cap-mounted – L1H,L2H,L3H

- 可与多种安全帽配备使用
- 不用时可将耳罩翻起，扣于帽上
- For use with wide range of popular hard hats
- Earcups snap in place during use and swing back when not in use

订货号 Ref. 10 119 93 **L3H** 27 NRR
 * 10 119 92 **L2H** 25 NRR
 10 119 91 **L1H** 23 NRR

Leightning® L1H		NRR 23								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		20.0	22.4	26.9	29.6	32.1	36.4	37.4	40.2	39.6
标准偏差 (分贝) Std. Dev.(dB)		2.9	3.4	2.8	2.2	2.8	3.3	2.9	3.7	4.9
Leightning® L2H		NRR 25								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		20.0	25.1	30.5	32.6	32.6	37.8	36.5	38.3	39.7
标准偏差 (分贝) Std. Dev.(dB)		3.0	2.5	2.6	2.4	2.5	2.4	2.7	3.4	4.0
Leightning® L3H		NRR 27								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		22.5	26.5	34.2	36.9	33.6	36.8	37.3	40.4	37.7
标准偏差 (分贝) Std. Dev.(dB)		3.4	2.5	3.4	3.2	2.4	3.0	2.9	1.9	2.8

L3N



颈带型 Neckband – L1N,L2N,L3N

- 金属环位于颈后
- 可与面屏，安全帽等配合使用
- Metal belt around neck
- Can be used with all kinds of safety hats

订货号 Ref. 10 119 96 **L3N** 28 NRR
 10 119 95 **L2N** 26 NRR
 10 119 94 **L1N** 25 NRR

Leightning® L1N		NRR 25								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		19.3	23.3	28.9	33.2	32.0	36.2	37.3	38.2	38.5
标准偏差 (分贝) Std. Dev.(dB)		2.6	2.4	2.9	2.0	2.2	2.9	2.7	2.9	2.8
Leightning® L2N		NRR 26								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		20.4	25.3	31.2	35.0	33.2	37.7	37.7	38.9	39.4
标准偏差 (分贝) Std. Dev.(dB)		3.4	2.9	2.7	2.2	2.5	3.2	2.2	2.3	2.7
Leightning® L3N		NRR 28								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		22.5	27.8	33.7	37.1	33.7	38.5	38.6	40.8	40.3
标准偏差 (分贝) Std. Dev.(dB)		3.3	2.6	2.9	2.7	2.1	2.7	2.7	2.3	2.6

听力防护系列
Hearing Protection

眼部及面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服装系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

最高的保护效果AFC技术设计
With Air Flow Control™ technology

- 绝缘设计可用于电力环境
- 专利的空气控制技术提供了最优的声音衰减效果
- 多节式可调节头带确保在使用时能很好的固定
- 单元式的耳罩垫更换快捷方便
- Dielectric construction suitable for all workplaces, especially electrical environments
- Feature patented Air Flow Control technology for optimal attenuation
- Quick klik height adjustment remains fixed during wear
- Snap-in ear cushions make replacement quick and easy

T3



头带型 Headband – T1,T2,T3

- 柔软舒适, 内附海绵的头带, 长久佩戴更加舒适
- 可伸缩调节高度同时又确保在使用时能很好的固定
- padded foam headband delivers superb comfort with minimum pressure on the head
- telescopic height adjustment remains fixed during use

订货号 Ref. 10 109 70 T3 30 NRR
10 109 29 T2 28 NRR 绿 green
* 10 109 28 T1 26 NRR 绿 green

Thunder® T1		NRR 26									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		19.1	25.0	30.4	33.5	35.1	35.5	35.6	39.5	39.4	
标准偏差 (分贝) Std. Dev.(dB)		2.9	2.3	2.5	2.5	2.7	3.2	3.0	2.3	3.6	
Thunder® T2		NRR 28									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		22.3	28.1	34.7	37.2	36.2	36.8	36.8	38.8	38.8	
标准偏差 (分贝) Std. Dev.(dB)		2.8	3.3	2.6	2.9	2.5	3.1	2.7	2.7	2.6	
Thunder® T3		NRR 30									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		24.7	29.8	35.5	38.5	37.9	39.6	39.6	41.9	42.3	
标准偏差 (分贝) Std. Dev.(dB)		2.8	2.7	2.8	3.0	2.5	3.1	2.4	2.6	2.4	

T1F



折叠型 Folding – T1F

- 折叠后便于储藏和携带
- Convenient folding design for easy storage

订货号 Ref. 10 116 00 T1F 25 NRR

Thunder® T1F											
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		19.6	23.2	29.6	32.6	33.6	34.7	36.3	39.8	38.3	
标准偏差 (分贝) Std. Dev.(dB)		3.4	2.1	3.0	2.4	2.8	2.7	2.9	2.2	4.2	

T3H



配帽型 Cap-mounted – T1H,T2H,T3H

- 可与多种安全帽配备使用
- 不用时可将耳罩翻起，扣与帽上
- For use with wide range of popular hard hats
- Earcups snap in place during use and swing back when not in use

订货号 Ref. 10 116 03 **T3H** 27 NRR
 10 116 02 **T2H** 25 NRR 绿 green
 * 10 116 01 **T1H** 23 NRR 绿 green

Thunder® T1H		NRR 23								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		16.9	22.0	28.4	31.6	33.1	33.7	34.7	39.6	38.6
标准偏差 (分贝) Std. Dev.(dB)		3.6	2.9	3.4	2.9	3.1	2.8	3.0	2.7	4.0
Thunder® T2H		NRR 25								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		20.7	26.9	31.6	34.1	34.9	35.2	36.6	39.4	39.6
标准偏差 (分贝) Std. Dev.(dB)		3.5	3.8	3.7	3.7	3.5	3.3	3.2	2.4	3.5
Thunder® T3H		NRR 27								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		23.6	27.7	34.1	34.5	32.9	36.4	39.1	40.6	41.4
标准偏差 (分贝) Std. Dev.(dB)		3.3	3.4	3.1	1.8	2.0	2.6	3.0	3.1	2.8

Mach 耳罩系列 Mach Earmuffs

- 经济型设计为多种工作环境提供简单方便的防护
- 超级轻便设计提供全天的舒适
- 绝缘设计可用于电力环境
- Economical design delivers adequate protection at a low cost
- Extremely lightweight construction provides all-day comfort
- Dielectric construction suitable for all workplaces, especially electrical environments

Mach 1



Mach™ 系列耳罩

- 经济型产品，为多种环境下的噪声环境提供简单方便的防护
- Economical design provides adequate protection at a low cost
- Extremely lightweight construction provides comfort for all-day wear
- Dielectric construction suitable for all workplaces, especially electrical environments

订货号 Ref. * 10 104 21 **Mach 1** 18 NRR

Mach™		NRR 18								
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		9.3	14.5	23.2	29.6	30.9	31.5	31.7	31.5	31.9
标准偏差 (分贝) Std. Dev.(dB)		3.2	2.6	2.8	3.2	3.0	3.0	2.9	3.2	2.8

听力防护系列
 眼部防护系列
 呼吸防护系列
 气检测仪系列
 手部防护系列
 防护服系列
 足部防护系列
 坠落防护系列

- 杜绝来自外界的高频及低频噪声，自然导入人声频率，以加强工作中的沟通效果
- 绝缘设计可用于电力环境
- 多节式可调节头带确保在使用时能很好的固定
- 单元式的耳罩垫更换快捷方便
- Uniform attenuation allows wearer to hear co-workers, instructions and other important sounds more naturally while blocking out harmful noise.
- Dielectric construction suitable for all workplaces, especially electrical environments
- Quick click height adjustment remains fixed during wear
- Snap-in ear cushions make replacement quick and easy

C3



头带型 Headband – C1,C2,C3

- 柔软舒适。内附海绵的头带，长久佩戴更加舒适
- 可伸缩调节高度同时又确保在使用时能很好的固定
- padded foam headband delivers superb comfort with minimum pressure on the head
- telescopic height adjustment remains fixed during use

订货号 Ref. 10 111 46 C3 27 NRR
10 111 45 C2 23 NRR
10 111 42 C1 20 NRR

Clarity™ C1		NRR 20									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		16.6	23.9	28.7	23.2	28.4	33.7	33.2	33.9	37.1	
标准偏差 (分贝) Std. Dev.(dB)		1.9	3.0	2.5	1.9	3.5	2.8	3.0	2.5	3.2	
Clarity™ C2		NRR 23									
Over-the-Head											
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		18.2	25.1	29.0	29.7	29.4	30.7	30.6	30.7	31.9	
标准偏差 (分贝) Std. Dev.(dB)		2.7	3.0	2.6	2.1	2.0	2.5	2.2	2.7	2.2	
Behind-the-Head											
平均衰减 (分贝) Mean Attn.(dB)		17.0	25.2	30.0	28.3	29.3	31.1	30.7	30.3	31.3	
标准偏差 (分贝) Std. Dev.(dB)		2.9	3.0	2.4	2.2	2.3	2.7	2.6	3.0	2.7	
Under-the-Chin											
平均衰减 (分贝) Mean Attn.(dB)		18.6	25	30.1	28.8	28.6	31.0	30.8	30.4	31.3	
标准偏差 (分贝) Std. Dev.(dB)		2.4	2.6	2.9	2.1	2.7	2.5	3.2	2.4	2.0	
Clarity™ C3		NRR 27									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		26.5	31.2	36.0	31.7	31.4	33.6	36.4	37.3	37.6	
标准偏差 (分贝) Std. Dev.(dB)		3.1	3.2	2.1	1.7	2.2	2.0	1.6	2.7	2.6	

运用先进的声音管理系统确保噪声防护下有效沟通
Advanced Sound Management Technology enhances communication on-the-job

C1F



折叠型 Folding – C1F

- 折叠后便于储藏和携带
- Convenient folding design for easy storage

订货号 Ref. *10 111 43 C1F 20 NRR

Clarity™ C1F		NRR 20									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		19.5	23.3	27.8	24.2	27.6	32.0	32.9	31.5	30.1	
标准偏差 (分贝) Std. Dev.(dB)		4.0	2.8	2.9	2.2	2.7	2.9	2.9	3.2	3.4	

C3H



配帽型 Cap-mounted — C1H,C3H

- 可与多种安全帽配备使用
- 不用时可将耳罩翻起，扣与帽上
- For use with wide range of popular hard hats
- Earcups snap in place during use and swing back when not in use

订货号 Ref. 10 112 43 **C3H** 25 NRR
10 112 42 **C1H** 20 NRR

Clarity™ C1H		NRR 20									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		19.2	22.6	27.0	22.0	28.1	33.7	32.2	33.6	35.0	
标准偏差 (分贝) Std. Dev.(dB)		2.9	2.8	2.5	1.7	2.2	3.2	3.0	2.5	2.3	

Clarity™ C3H		NRR 25									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		26.5	30.0	34.0	29.8	29.4	33.6	37.4	36.6	38.1	
标准偏差 (分贝) Std. Dev.(dB)		2.7	3.0	2.9	1.9	2.1	2.7	2.9	2.7	2.2	

Impact



订货号 Ref. 10 102 76 **Impact** 23 NRR
10 106 32 **ImpactH** 21 NRR

Impact™ 电子耳罩

- 立体环绕效果，提供频率范围 80 - 14,000 Hz 的优异的声音还原
- 建立在耳罩内部的扬声器可再现外界声音的方向和距离
- 长达700小时的电池寿命
- 4小时自动关闭内部电子设备，以保证产品的节电功能
- 预留的输入端口，可连接电子音频设备。
- 耳罩内部同时提供了最高噪声限度 (82dB) 以确保听力防护
- Amplifies ambient sound to safe 82 dB - response technology reverts to passive hearing protector if noise reaches 82dB
- Sound amplification increases communication and awareness - employees can hear alarms/warning signals. Co-workers' voices
- Directionally places stereo microphones amplify and enhance sound for more natural hearing
- Snap-in ear cushions make replacement quick and easy
- Automatic shut-off after 4 hours
- Including 2 AA batteries for 140 hours of use

Impact™		NRR 23									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		13.6	19.3	29.4	30.1	32.4	37.3	40.8	43.9	45.6	
标准偏差 (分贝) Std. Dev.(dB)		2.4	2.3	1.9	2.1	2.8	2.6	2.4	2.7	2.2	

Impact™ H		NRR 21									
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000	
平均衰减 (分贝) Mean Attn.(dB)		14.2	19.2	29.7	26.9	28.8	35.4	41.0	43.8	44.9	
标准偏差 (分贝) Std. Dev.(dB)		3.5	2.9	2.1	3.1	2.3	2.5	2.3	2.4	2.3	

- 多向头带, 使用者可将头带放在头的前部, 上部或者颈部
- 可作为配帽型耳罩的替代品
- 内部通风头带最小化头部压力, 在温热潮湿的环境佩带舒适
- 不变形头带外壳适合各种恶劣环境
- 单元式的耳罩垫更换快捷方便
- 伸缩头带能在佩带于头后部和下巴下时更好的固定
- 绝缘设计可用于电力环境
- Multiple-position headband allows wearer to select position over-the-head, behind-the-head or under-the-chin
- Alternative to cap-mounted earmuffs- wear with hard hats, face shields respirators and other PPE
- Inner-ventilated headband minimized pressure on the head, breathes easier in warm/humid climates
- Non-deforming outer headband withstands rough treatment in the toughest workplaces
- Snap-in ear cushions make replacement quick and easy
- Dielectric construction suitable for all workplaces, especially electrical environments
- Includes attached elastic headband strap for better positioning when worn behind-the-head or under-the-chin

Viking™ 系列耳罩

- 多向头带, 使用者可将头带位于头的前部, 上部或后部
- 可做配帽型耳罩的替代品
- Multiple-position headband allows wearer to select position
- Alternative to cap-mounted earmuffs
- Non-deforming outer headband withstands rough treatment in the toughest workplaces
- Includes headband strap for better positioning when worn behind-the head or under-the-chin

V3



订货号 Ref. 10 109 27 V3 29 NRR
*10 109 26 V2 27 NRR
10 109 25 V1 25 NRR

多向头带式设计 Multiple-position headband

Viking™ V1		NRR 23				Over-the-Head				
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		14.1	21.9	28.0	32.4	34.2	35.4	35.7	37.2	36.7
标准偏差 (分贝) Std. Dev.(dB)		2.5	3.2	3.1	2.6	3.4	2.6	2.5	4.5	3.7
		NRR 22				Behind-the-Head				
平均衰减 (分贝) Mean Attn.(dB)		12.5	19.1	27.1	31.2	34.5	36.4	35.4	37.1	37.9
标准偏差 (分贝) Std. Dev.(dB)		2.5	3.3	2.7	2.2	3.7	2.6	1.9	2.8	2.9
		NRR 22				Under-the-Chin				
平均衰减 (分贝) Mean Attn.(dB)		12.3	18.6	26.9	30.6	35.4	35.3	35.2	36.5	37.3
标准偏差 (分贝) Std. Dev.(dB)		2.2	2.4	2.4	3.1	2.6	3.1	3.3	2.8	3.2
Viking™ V2		NRR 25				Over-the-Head				
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		15.2	20.4	28.9	34.2	36.6	39.0	37.0	37.7	38.3
标准偏差 (分贝) Std. Dev.(dB)		2.2	2.1	2.3	2.6	2.7	2.8	2.8	2.6	3.1
		NRR 24				Behind-the-Head				
平均衰减 (分贝) Mean Attn.(dB)		16.4	20.5	27.9	34.4	35.7	39.3	37.6	38.0	37.4
标准偏差 (分贝) Std. Dev.(dB)		2.5	2.3	2.6	2.9	2.8	3.2	2.9	3.0	3.1
		NRR 24				Under-the-Chin				
平均衰减 (分贝) Mean Attn.(dB)		16.3	19.9	27.9	34.7	36.5	40.0	38.4	37.0	36.9
标准偏差 (分贝) Std. Dev.(dB)		2.7	2.8	2.7	2.7	2.9	3.4	2.9	3.3	3.3
Viking™ V3		NRR 29				Over-the-Head				
频率 (赫兹) Frequency/Hz		125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)		22.9	24.8	31.4	35.9	39.6	41.6	41.5	39.2	37.0
标准偏差 (分贝) Std. Dev.(dB)		2.2	2.0	1.9	2.2	2.0	2.3	3.2	3.2	3.0
		NRR 28				Behind-the-Head				
平均衰减 (分贝) Mean Attn.(dB)		21.0	24.2	31.4	36.3	39.4	41.1	41.6	39.1	36.5
标准偏差 (分贝) Std. Dev.(dB)		1.8	1.8	2.6	1.7	2.6	3.6	2.7	2.5	1.9
		NRR 28				Under-the-Chin				
平均衰减 (分贝) Mean Attn.(dB)		20.9	24.5	30.6	34.9	37.5	40.2	40.8	39.1	35.5
标准偏差 (分贝) Std. Dev.(dB)		3.1	1.9	1.7	1.4	2.0	2.1	2.3	2.5	2.3



> > > 订购热线：400-600-7758 网站：www.myehs.cn

防护眼镜	Spectacles	17
护目镜	Goggles	21
防护屏	Faceshield / Visors	22
洗眼器	Eyewash	24
眼镜清洁套装	Clean Kits	26
自动变光焊接面罩	Auto Darkening Filter Helmet	27
传统型焊接面罩及焊接护目镜	Passive Welding Helmet & Goggles	28

配戴眼部和面部保护装置，可以避免90%的眼部事故



由于其构造，眼睛是一个特别敏感的器官，所受的损伤经常无法医治



机械性危险

冲击，灰尘，固体颗粒，沙砾

后果：角膜损伤或穿孔，虹膜撕裂，晶状体浑浊

化学性危险

液滴和液体飞溅，溶剂，气雾剂，酸，碱，水泥，灰浆等等

后果：角膜灼伤或浑浊，病毒感染，急性结膜炎，溃疡

放射性危险

红外线，紫外线，激光，强光

后果：白内障，角结膜炎，视网膜损伤或灼伤，晶状体浑浊

电击危险

直接接触，短路引起的电弧

后果：视网膜灼伤，角膜损伤（固体颗粒），晶状体损伤

高温危险

高温液体，熔化物质，火焰

后果：眼部重伤，角膜浊点

焊接可能造成的危险

一切与焊接有关的操作对焊接工和周围环境的人群（助理焊接工，同事或邻近的任何人）造成危险。只要了解潜在危险种类和需要保护的部位，采取适当的保护措施便可非常安全地进行焊接工作。

焊接操作通常会产生以下危险

紫外线辐射（100-400nm）：

引起焊接时光创伤造成的角膜炎，创伤非常疼痛，通常会造成几天停工。此外，紫外线可能引起不可逆的白内障，也会刺激皮肤，产生灼伤，甚至癌症。

红外线照射：

可能引起不可逆的视网膜灼伤和白内障。强烈的可见光会造成永久的伤害，如视网膜损伤或灼伤。在任何情况下，暴露在强光中会引起眼部疲劳（红眼睛和疼痛）。

镜架专用指示符号

EN166-详细说明	B-D 制造商(Sperian)
EN167-光学试验法	Z87 通过美国标准
EN168-非光学试验法	+ 通过高速冲击试验
EN169-焊接用滤镜	GB5890 通过中国标准
EN170-紫外线滤镜	166 标准号
EN171-红外线滤镜	xxx 应用领域
EN172-工业用防日光滤镜	3=液体(液滴或飞溅)
EN175-焊接装备	4=较大灰尘颗粒(颗粒直径>5微米)
EN379-活性焊接滤镜	5=气体和较小灰尘颗粒
	8=短路引起的电弧
	9=熔化的金属和高温液体
	F 防机械性危险
	F(T) 极端温度下防冲击(从-5°C到+55°C)
	H 该装置适用于头较小者
	2.5 与镜架相容的最高等级号

镜片专用指示符号

S 有色镜片
+ 通过高速冲击试验
3 代码号：说明滤镜种类： 2和3=紫外线；4=红外线；5和6=日光
1.2 保护等级：指明镜片的颜色(眼镜和护目镜为1.2到7之间)
B-D 制造商(Sperian)
视力等级(1=长期配戴，2和3=临时配戴)
F 防机械性危险(F=45米/秒的冲击)
F(T) 极端温度下防冲击(从-5°C到+55°C)
8 防因短路引起的电弧
9 不粘熔化的金属，防止高温液体渗透
K 表面不受微粒腐蚀
N 防雾镜片
R 加强反射红外线能力
0 (O)为原装镜片，(V)为更换镜片(可选)

首款适合亚洲人脸型的流线型防护眼镜, 根据近万名使用者的实际需求设计

S600A 流线型防护眼镜



S600A 同时具有以下功能

防冲击性: 符合美国 ANSIZ 87+ 高级别标准以及国标 14866-2006 标准

防雾: 优异防雾涂层, 即刻不起雾

耐刮擦: 符合亚洲工作环境的特强耐刮擦镜片, 提高保护持久度



UV 防护: 99% UV 防护

VLT: 可见光透射率 92%

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
110100	蓝色 Blue	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
110110	黑色 Black	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
110111	黑色 Black	灰色 TSR Grey Fog-Ban	是 yes	是 yes	室内、室外环境 outdoor use & indoor use
110200	蓝色 Blue	透明 Clear Fog-Ban	加强 extra	否 no	室内环境 indoor use
110210	黑色 Black	透明 Clear Fog-Ban	加强 extra	否 no	室内环境 indoor use

经典设计款型——值得信赖的经典防护眼镜设计，完全满足作业者的防护需求，让其在佩带时自信自如。

S200A 亚洲款防护眼镜

强化涂层镜片：优异的耐刮擦性能。具有该涂层的镜片能提供比市场上普通镜片难以达到的表面硬度，从而提供更好的使用性能。

防雾涂层镜片：防雾效果出众。确保在特殊工作环境中，镜片提供优异的清晰度。考虑到长时间佩戴的舒适度，S200A在鼻梁及镜腿处添加柔软的TPE材质软垫，使用中既可防滑又可增加长久佩戴的舒适性。



- ① S200A 符合中国工作环境的镜片设计
- ② S200A 符合符合使用者舒适需求的细节设计
- ③ 左侧镜架添加防滑握点，便于拿捏。
- ④ S200A 符合亚洲人脸型的镜框设计
宽阔的镜框符合亚洲人宽阔头型。
平坦弧度镜架以符合亚洲人较为平坦的前额。
- ⑤ 镜腿可调节长度，配戴更舒适。

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
100100	蓝色 Blue	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
100110	黑色 Black	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
100111	黑色 Black	灰色 TSR Grey Fog-Ban	是 yes	是 yes	室外环境 outdoor use
100200	蓝色 Blue	透明 Clear Fog-Ban	加强 extra	否 no	室内环境 indoor use
100210	黑色 Black	透明 Clear Fog-Ban	加强 extra	否 no	室内环境 indoor use
100211	黑色 Black	灰色 TSR Grey Fog-Ban	加强 extra	否 no	室外环境 outdoor use

VisiOTG-A 亚洲款访客眼镜



- 专为亚洲人脸型设计
- 可佩带在校正眼镜外
- 可作为参观眼镜
- 全透明设计
- 防冲击，防雾，防刮痕
- 符合中国GB及美国ANSI标准
- Design for the Asian Face
- Available in 2 versions: uncoated or with Hardcoat & Fog-Ban anti-fog coating lens
- Superb optics allow clear, distortion free vision
- Single polycarbonate lens with integral sideshields and contoured nose bridge
- Fits comfortably over prescription spectacles

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
100001	透明 Clear	透明 Clear Fog-Ban	是 yes	否 no	室内环境 indoor use
100002	透明 Clear	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use

Op-Tema 可调节防护眼镜



- 可调节柔软鼻夹
- 可调节镜腿，及细绳
- 一体式中桥设计
- 全视野轻质镜片
- 整体重量轻：30克
- 防雾，防冲击，防刮痕
- 符合中国GB、美国ANSI及欧洲标准
- Lightweight full view lens
- Built-in moulded browbar
- Soft, adjustable nosepiece
- Adjustable temple length and lens angle
- Durable lenses with Hardcoat & Fog-Ban anti-fog coating

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
1004947	透明/黑色 Clear/Black	 透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use

现代设计款型——更舒适时尚设计，符合现代审美趋势，让作业者更加乐意佩戴。

Millennia Sports 运动款防护眼镜



- 传承Millennia Classic的优异性能
- 一体式中桥设计，视野开阔（包括侧视野）
- 抗冲击的三维聚酰胺镜腿符合人体工程学原理，方便与安全帽配合使用
- 可调节细绳
- 符合中国GB、美国ANSI及欧洲标准
- All the performance and comfort features of the Pulsafe Millennia Classic with a sleek frame giving it a true sport design
- Adjustable retainer: Flexicord
- Transparent "moulded-in-lens" brow for improved vision and comfort
- 3D ergonomically curved high impact nylon temples to accommodate hardhat harnesses more comfortably

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
10 059 85	黑色 Black	 透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 059 86	黑色 Black	 灰色 TSR Grey Fog-Ban	是 yes	是 yes	室外环境 outdoor use

Millennia Classic 简洁款防护眼镜



- 流行全球的现代设计款型先驱之作
- 平衡而轻便的镜架, 重量: 32克
- 一体式中桥设计, 视野开阔 (包括侧视野)
- 镜片视野清晰, 无光学扭曲和棱型偏差
- 可调节细绳
- 符合中国GB、美国ANSI及欧洲标准
- A design preferred by wearers in field trials and research
- Balance and lightness of frame, resulting in a virtually weightless feel
- Straight temples, no adjustments or clumsy spatula-temples necessary
- Adjustable, breakaway Flexicord retainer for added security and convenience in the active work environment
- Comfortable, universal nose bridge
- Unique 9 base curved lens design for excellent optical qualities and complete protection
- Durable lenses with Hardcoat & Fog-Ban anti-fog coating
- A full, unobstructed field of vision, including side view

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
10 027 81	黑色 Black	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 027 82	黑色 Black	灰色 TSR Grey Fog-Ban	是 yes	是 yes	室外环境 outdoor use
10 052 12	黑色 Black	黄色 HDL Yellow Fog-Ban	是 yes	是 yes	光线较弱环境 low light
10 027 83	蓝色 Blue	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 064 05	黑色 Black	IR3	是 yes	否 no	气焊使用 welding applications
10 064 06	黑色 Black	IR5	是 yes	否 no	气焊使用 welding applications

VL1-A 亚洲款防护眼镜



- 专为亚洲人脸型设计
- 弧型时尚设计
- 防雾, 防冲击, 防刮痕
- 符合中国GB及美国ANSI标准
- Design for the Asian Face
- Lightweight full view lens
- A full, unobstructed field of vision, including side view
- Durable lenses with Hardcoat & Fog-Ban anti-fog coating

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
10 00 20	透明/黑色 Clear/Black	透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 00 21	透明/黑色 Clear/Black	灰色 TSR Grey Fog-Ban	是 yes	是 yes	室外环境 outdoor use
10 00 22	透明/黑色 Clear/Black	银灰色	是 yes	否 no	室内/外环境 indoor/outdoor use

听力防护系列

眼部防护系列

呼吸防护系列

气检测仪系列

手部防护系列

防护服系列

足部防护系列


坠落防护系列



LG10 轻便型护目镜

Excellent value for money in a lightweight

- 聚碳酸酯镜片提供优异防冲击性能, 同时也能防风及液体
- 重量轻, 长久佩戴依然舒适
- 柔软镜框, 简易头戴。适合各类人群佩戴
- 符合中国GB、美国ANSI及欧洲标准
- Comfortable design
- Impact resistant polycarbonate lens for excellent protection against flying particles, coarse dusts, liquid droplets, mists and sprays
- Lightweight design for perfect comfort and wearer acceptance
- Extra soft seal and easily adjustable headband fits a wide variety of workers




订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
10 055 04	透明PC镜片	 透明 Clear Fog-Ban	是 yes	否 no	室内环境 indoor use

180度全景大视野



V-Maxx 运动型护目镜

- 180度全景大视野护目镜, 不会产品视觉变形
- 可配合校正眼镜或呼吸半面罩使用
- 可选头带材料
- 角度可调节弹性头带, 方便与安全帽配合使用, 在不同位置均能保持舒适
- 间接通风, 防液体飞溅
- 符合中国GB、美国ANSI及欧洲标准
- 180° field of vision for distortion free peripheral vision
- Fits a wide variety of workers and can be worn over prescription eyewear and with half-mask respirators
- Rotating strap attachments for easier use with hard hats
- Special concept of indirect ventilation to comply with splash-resistance test
- Acetate lens with hardcoat & Fog-Ban

订货号 Ref.	镜架及镜腿 Frame/Temple	镜片 Colour Lens	抗刮痕 Abrasion Resistant	防雾 Anti-Fog	使用环境 Applications
10 061 93	透明PC镜片, 间接通风	 透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 075 06	透明聚碳酸酯镜片, 间接通风, 防化, 氯丁橡胶头带	 透明 Clear Fog-Ban	是 yes	是 yes	室内环境 indoor use
10 081 11	焊接镜片, IR5	 IR5	是 yes	是 yes	气焊使用 welding applications

72.06

10 023 30



10 023 12



Supervisor

适用与重工业领域中与安全帽配合使用

- 能配合多种款式的安全帽产品
- 面屏固定方便, 更换简易
- 弯折面屏, 能有效风起到最大脸部防护能力
- 根据不同工作环境提供多种面屏可供选择

A robust, heavy-duty, helmet mounted faceshield range with hearing protection compatibility

- Compatible with wide range of helmet designs (size, shape and geometry)
- Visor fixing method is secure and allows easy visor replacement
- Creased visor eliminates gaps and visor profile follows contours of the face for maximum protection, allowing full unrestricted head movement
- Visor selection can be tailored to the specific hazard/application: mechanical, chemical, heat etc

10 023 25

订货号 Ref.	产品描述 Description	镜片 Colour Lens	使用环境 Applications
10 023 02	面屏支架 (用于安全帽)		
10 023 12	聚碳酸酯 PC防护面屏 (需配合1002302支架使用)	透明 Clear Fog-Ban	防机械冲击, 颗粒 heavy mechanail tasks
10 023 30	聚碳酸酯 绿色5"防护面屏 (需配合1002302支架使用)	IR5	气焊使用 welding applications
10 023 25	聚碳酸酯 PC镀金 吸收/抵御 热融金属 防护面屏 (需配合1002302支架使用)		吸收/抵御热融金属 molten metal/radiant heat

安全, 实用, 经济 Safe, practical, economical



Clearways

- Clearways头戴式面屏组合提供了优异的经济性及耐用性
- 总重量仅为160克, 适合全天佩戴
- 提供聚碳酸酯和聚醋酸酯两种材料面屏提供选择
- 聚醋酸酯面屏能有效防护化学物质飞溅
- The Clearways combination offers both strength and durability
- Only 160g, it is comfortable enough to wear all day
- Integral visor fitting ensures extra protection against chemical seepage
- Economical replaceable visors available in acetate or polycarbonate

订货号 Ref.	产品描述 Description	镜片 Colour Lens	使用环境 Applications
10 023 41	独立佩戴式面屏支架		
10 023 53	聚碳酸酯PC防护面屏 (需配合1002341支架使用)	透明 Clear Fog-Ban	防机械冲击, 颗粒 heavy mechanail tasks
10 023 60	聚醋酸酯防护面屏 (需配合1002341支架使用)	透明 Clear Fog-Ban	化学品飞溅 chemical projections

听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

经济型面屏 Economic Faceshield

- PC材料防护屏、附带铝边
- 用于防护颗粒、化学品飞溅、热和冲击
- 需与防护屏支架组合用

PC visor with aluminum bound, provides

- protection against foreign particles,
- chemical splash, heat and impact resistance
- Use with bracket or headgear



安全帽面屏支架 Headgear for Hardhat

- 塑料支架、塑料圆形卡槽，带有弹簧带
- 可以方便、牢固的安装安全帽上
- 防护屏可以翻起，可定位在任何位置
- 需与防护屏组合使用
- ABS construction, grooved frame with spring coil, easy to install on helmet. Positive stop hinge automatically holds visor in raised position.
- Use with visor

头带式防护屏支架

- 带有帽沿，可以保护前额不受伤害
- 棘轮悬架和汗代可以调节，增加舒适感
- 防护屏可以翻起，并定位在任何需要的位置
- 需与防护屏组合使用
- Browguard eliminated forehead injury, adjustable ratchet suspension and sweatband for adding comfort, tension knobs allows flip-up visor to be positioned as user wishes



订货号 Ref.: BD-176B

订货号 Ref.	产品描述 Description	镜片 Colour Lens	使用环境 Applications
BD-173B	安全帽面屏支架		
BD-176B	头带式防护屏支架		
SE-173A	面屏	 透明 Clear Fog-Ban	防机械冲击，颗粒，化学品飞溅 heavy mechanail tasks, chemical projections
SE-174A	绿色面屏	 IR5	气焊使用 welding appliactions



Porta Stream 系列便携式紧急洗眼器 Fendall Emergency Eyewash Station

- Porta Stream® II 便携式洗眼器能提供15分钟不间断的眼部冲洗标准
- Porta Stream® I 便携式洗眼器能提供6分钟不间断的眼部冲洗标准
- 可根据需求安装在墙面，并可随时移动
- 搭配移动推车使用，便可快速移动到事发现场
- 拉扣式喷淋头设计，方便快速及简便的喷淋
- Porta Stream® II 内含180 盎司浓缩洗眼液，
- Porta Stream® I 内含70 盎司浓缩洗眼液
- 每6个月必须清洁水槽
可选附件清水防腐剂，可保证水槽内水质120有效使用
- Porta Stream® II offers versatile portability and 15-minutes of uninterrupted flushing – without costly plumbing. Porta Stream's simplicity of installation and operation has made it an industry favorite. It is easily removed to activate flushing, leaving hands free to hold eyelids open. Include Eyesaline Concentrate 180 oz. Container
- Porta Stream® I offers versatile portability and 6-minutes of uninterrupted flushing – without costly plumbing. Porta Stream's simplicity of installation and operation has made it an industry favorite. It is easily removed to activate flushing, leaving hands free to hold eyelids open. Include Eyesaline Concentrate 70 oz. Container
- Maintenance: 6 month change/ cleaning

	订货号 Ref.	产品描述 Description
Porta Stream 系列便携式紧急洗眼器	32-000200	Porta stream II(15分钟流量 16加仑水槽)
	32-000100	Porta stream I (6分钟流量 8加仑水槽)

便携式紧急洗眼器附件:



订货号 Ref.: 32-001100 Eyesaline preservative

瓶装清水防腐剂 Eyesaline Preservative

- 适用于 Porta Stream 各款便携式洗眼器
- 抑制细菌增长长达 120 天。
- 每瓶 8 盎司可适用于 16 加仑水。
- 保质期 30 月 (未开封)
- Use with all portable devices.
- Inhibits bacteria growth up to 120 days.
- One bottle (8 oz.) will preserve 14-16 gallons.
- 30-month shelf life (unopened).
- Sold in cases of four with tamper evident seals

便携式紧急洗眼器附件：



订货号 Ref.: 32-001060 Universal cart

移动推车 Universal Cart

- 移动推车，可悬挂 Porta Stream® I 或 Porta Stream® II 洗眼器
- 移动推车，可悬挂 Fendall Porta Stream® I 或 Porta Stream® II 洗眼器
- Use with all portable devices.
- Provides quick, easy portability for self-contained, gravity-fed emergency eyewash devices.
- Reliable, hand-truck design ensures durability



订货号 Ref.: 32-001187

便携式紧急冲淋装置 Fendall Emergency Shower

- 紧急全身冲淋装置（附带拎包）
- SCBA组成紧急救援设备
- 2分钟内快速展开
- 携带方便（图示中下方集水槽需额外订购）
- Emergency Shower with Carry Bag
- Accommodates emergency responder in full chemical gear with SCBA
- Lightweight, compact design – assembled and operational in less than two minutes by one person



订货号 Ref.: 2210

墙式洗眼器

- 进水口 1/2"，出水口 1-1/4"
- 1-1/4" 电镀钢制立柱
- Water Inlet: 1/2".
- Water Outlet: 1 1/4"



订货号 Ref.: 2220

立式洗眼器

- 进水口 1/2"，出水口 1-1/4"
- 1-1/4" 电镀钢制立柱
- Water Inlet: 1/2".
- Water Outlet: 1 1/4"



复合式洗眼器

- 防腐蚀环氧树脂, 落地式, 复合式洗眼及喷淋装置
- Shower/eye wash stay open valves ABS shower head and bowl

订货号 Ref.: 4220

眼镜清洁套 Clean Kits



镜片擦拭纸 Lens Cleaning Tissues

- 500抽擦拭纸
- 特殊表面, 对镜片无磨损
- 500 per box
- Non-abrasive to protect coatings

订货号 Ref.: 10 113 79



镜片清洁喷剂 Lens Cleaning Solution

- 500毫升容量
- 无酒精及硅成分可保护镜片涂层
- 专为Sperian涂层设计
- 500ml spray bottle
- Contains no alcohol or silicone
- Specially formulated for all Pulsafe coatings

订货号 Ref.: 10 113 78



镜片清洁套装 Lens Cleaning Station

- 方便携带设计, 亦可固定安装
- 无酒精及硅成分可保护镜片涂层
- 专为Sperian涂层设计
- 包含: 500ml清洁剂 - 1500抽擦拭纸
- Easily portable and disposable
- Contains no alcohol or silicone
- Specially formulated for all Pulsafe coatings
- Contains: 500ml spray bottle of Pulsafe Clear lens cleaning solution - 1500 non-abrasive tissues

订货号 Ref.: 10 113 80

通过面罩外侧可进行各种调节，
焊接过程中也可使用



订货号 Ref.: 1000.150

OSE Evolution

- 超大自动变光区间 暗度从5-13度
- 两档选择 低暗度区间5-9度, 高暗度区间9-13度
- 多种变光敏感度调节 (敏感角度及敏感等级)
- 特别提供打磨模式, 暗度等级4度
- 两档变光恢复模式选择: 快速、慢速
- 焊帽符合重量平衡设计, 佩戴轻松
- 加厚防护面窗, 耐190米/秒冲击, 耐更高辐射热
- 适合非激光焊接类所有焊接
- Auto Darkening Filter helmet with shade 9-13 & 5-9
- Variable sensitivity,
- Delay range fast-slow
- Grinding mode
- All types of welding except laser welding

OSC

- 自动变光区间 暗度从9-13度
- 变光敏感度角度调节
- 两档变光恢复模式选择: 快速、慢速
- 焊帽符合重量平衡设计, 佩戴轻松
- 防护面窗, 耐冲击, 耐辐射热
- 适合非激光焊接和气焊类所有焊接
- Auto Darkening Filter helmet with shade 9-13
- Sensitivity adjustment function
- Very light and durable new material
- Anti-bacteria headgear
- CE/ANSI Approved
- All types of welding except laser and gas welding



订货号 Ref.: 1000.053

Mira Plus

- 两档自动变光区间10, 11度
- 变光敏感度角度调节
- 两档变光恢复模式选择: 快速、慢速
- 焊帽符合重量平衡设计, 佩戴轻松
- 防护面窗, 耐冲击, 耐辐射热
- 适合MIG, MAG焊接
- Auto Darkening Filter helmet with shade 10&11
- Sensitivity adjustment function
- Very light and durable new material
- Anti-bacteria headgear
- CE/ANSI Approved



订货号 Ref.: 1001.085

自动变光焊接面罩附件 Auto darkening filter helmet accessories

订货号 Ref.	产品描述 Description
5000.300	OPTREL 焊接镜片里侧保护片 (每包5片) inside cover lens
5000.212	OPTREL 替换镜片, 每包5片 (适用于 Satellite 焊接面罩) outside cover lens for Satellite
5000.105	OPTREL 替换镜片, 每包10片 (适用于舒适型和经济型焊接面罩) outside cover lens for OSC and Mira plus
4028.015	OPTREL 自动变光焊接面罩 颈部保护罩 chest protection
5003.250	OPTREL 自动变光焊接面罩 内侧头箍 head band
5011.180	OPTREL 自动变光焊接面罩 安全帽适配器 hardhat adapter

传统型焊接面罩及焊接护目镜 Passive Welding Helmet & Goggles



订货号 Ref.: BD-1150

Weld up II

- 间接通风, 镜框柔软, 易弯曲
- 镜片暗度5°, 可翻起, 方便观察
- 可用于气焊、铜焊和切割
- Indirect ventilation, soft, flexible vinyl frame, 50mm round polycarbonate green shade No.5 flip front lens, can switch from welding to chipping for easy inspection

Standard Welding Helmet (with lens)

- 外壳耐撞击, 2" x 4-1/4" 大的焊接镜片可翻起, 方便观察
- 经久耐用, 可保护胸部和喉部不被火花伤害
- 悬架可调节, 顶部的曲线型延伸部分可以增加头部的保护效果
- Straight shell impact resistance, 2" x 4-1/4" flip front lens for easy weld inspection, durable, protects upper chest and throat from sparks and spatter. Adjustable ratchet suspension, curved top extends well over the head for added protection



订货号 Ref.: BD-2720

透明面窗 Clear Lens

- 2" x 4-1/4" 聚碳酸酯透明面窗, 耐冲击, 耐焊渣喷溅, 防紫外线
- 2" x 4-1/4" polycarbonate clear plate. Impact, spatter resistance and UV protection

订货号 Ref.: BD-2820

焊接面窗 Welding Lens

- 2" x 4-1/4" 聚碳酸酯点焊镜片, 耐冲击, 耐焊渣喷溅, 防紫外线
- 2" x 4-1/4" polycarbonate green plate. Impact, spatter resistance and UV protection

订货号 Ref.: BD-2821



> > > 订购热线：400-600-7758 网站：www.myehs.cn

口罩	Disposable Mask	31
半面罩	Reusable Half Mask	33
全面罩	Reusable Full Face Mask	36
正压式空气呼吸器	SCBA	39
正压式供气呼吸防护系统	Supplied Air Equipment	51

过滤设备使用等级

气体/蒸气防护等级:

- **等级一** 气体体积浓度小于0.1% (建议选择滤盒产品)
- **等级二** 气体体积浓度介于0.1%-0.5%之间 (建议选择滤罐产品)
- **等级三** 气体体积浓度介于0.5%-1%之间 (建议选择系于腰带上的大容量滤罐产品)

颗粒, 粉尘, 气溶胶防护等级:

- **等级一** 用于防护不具有特殊毒性的大颗粒 (例如: 碳酸钙颗粒)
- **等级二** 用于防护固体或者液体的气溶胶, 以及有危险性和腐蚀性的液体 (例如: 二氧化硅-碳酸钠)
- **等级三** 用于防护有毒的固体或者液体 (例如: 铍)

过滤设备选择表

过滤罐的选择需遵循以下原则:

- 根据有毒物质种类选择防护
- 完成工作的方式和时间
- 从事工作的性质
- 使用的工具

色码

A	沸点高于65°C的有机气体及蒸气
AX	沸点低于65°C的有机气体及蒸气
B	无机气体及蒸气: 氯气, 硫化氢, 氰酸等
E	酸性气体及蒸气: 二氧化硫等
K	有机氨基衍生物-氨水
P	固态和液态的微粒, 气雾
HG	汞
NOP	磷氧化氮
CO	一氧化碳

Filter usage categories

Gas / Vapour protection:

- **Class 1** for a gas content below 0.1% in volume (filters)
- **Class 2** for a gas content between 0.1% and 0.5% in volume (cartridges)
- **Class 3** for a gas content between 0.5% and 1% in volume (large-capacity canisters worn on the belt)

Protection from particulates, dust and aerosols:

- **Class 1 (P1 or FFP1)** for protection against coarse solid particulates without specific toxicity (calcium carbonate)
- **Class 2 (P2 or FFP2)** against solid and/or liquid aerosols and/or liquids indicated as dangerous or irritating (silicon dioxide - sodium carbonate)
- **Class 3 (P3 or FFP3)** against toxic solid and/or liquids (beryllium - calcium carbonate - exotic woods)

Choosing a filter

A filtering cartridge is selected according to the following:

- The toxic substances from which protection is sought
- The work to be performed
- The mode of operation and length of action
- The devices at hand

Colour Code

A	Inorganic vapours, solvents and hydrocarbons
AX	Organic volatile gas vapours - Boiling point below 65°C
B	Inorganic gases and vapours, e.g. chlorine, hydrogen sulphide, hydrocyanic acid
E	Acid gases - sulphur anhydride
K	Organic amine compounds - Ammonia
P	Particulates, solid and liquid aerosols
HG	Mercury
NOP	Nitrogen monoxide
CO	Carbon monoxide

	标准号 Standard	过滤效率分类 Filtering category	过滤效率 Filtering rate	防护种类 Protection	测试流量 Test flow rate
美标 USA	NIOSH 42CFR84 (1995年版) (1995 version)	N95/R95/P95	95%	• N-非油性颗粒 N:no oil aerosols • R-非油性油性颗粒兼防(时间限制) R:oil aerosol(limited duration) • P-非油性油性颗粒兼防 P:oil aerosol (long duration)	85L / 分钟 85L / Min
		N99/R99/P99	99%		
		N100/R100/P100	100%		
欧标 Europe	EN149-2001 (2001年版) (2001 version)	FFP1	>=80%	非油性油性颗粒兼防 both kinds of aerosols (Oil or Non oil)	95L / 分钟 95L / Min
		FFP2	>=94%		
		FFP3	>=99%		
国标 GB	GB2626-2006	KN90/KP90	>90%	• KN-非油性颗粒 KN:no oil aerosols • KP-油性颗粒 KP:oil aerosol	85L / 分钟 85L / Min
		KN95/KP95	>95%		
		KN100/KP100	>99.97%		

欧标 FFP1 油性非油性兼防口罩
EN FFP1 against oil and non-oil particulates



Sperian 5140M/L-0V 高性能活性炭防护口罩

- 在职业允许暴露浓度值以下, 有效降低有机气体气味
- In case of exposure to levels of organic gases and vapours below OEL*(methyl-ethyl-cetone, glutaraldehyde, etc ...), offers reduction of the nuisance due to odours

订货号 Ref.: 10 055 91

舒适型防护口罩

- 鼻型外壳设计, 与面部曲线完美结合, 方便佩戴眼镜。
- 无鼻夹, 免除鼻夹压力, 省去调节烦恼
- 六点焊接技术, 使内衬与外壳紧密结合, 防止内衬在呼吸时触及鼻部和嘴
- 棉质头带, 吸汗不紧绷
- 坚硬外壳, 有效抵挡冲压
- 柔软内衬, 减少对皮肤的刺激
- 优质滤材, 保证大大低于标准要求的吸气与呼气阻力
- Pre-formed upper nose shape, excellent fit and perfectly compatible with eyewear
- Non-nose bridge design minimizes pressure points.
- Inner layer welded at six points to outer shell front to eliminate being drawn into mouth and nose during inhalation
- Elastics for comfort and convenience. No uncomfortable staples.
- Soft inner layer for comfort.

符合美国 NIOSH N95 标准
符合欧标 FFP1 标准
NIOSH N95 standard
EN FFP1 standard

SuperOne 防护口罩

- 全新革命性设计, 与面部曲线完美贴合
- 省却调节鼻夹的烦恼, 带给你前所未有的呼吸感受
- 高性能呼吸效率, 符合NIOSH或EN标准
- A revolutionary design fits face perfectly
- Cancel the nose bridge bringing an unsurpassed feeling and extreme comfort for the higher work safety and pleasure
- NIOSH or EN approved



美标订货号 Ref.: 产品名称 Product

10 157 90 SuperOne N95 舒适型防护口罩
SuperOne N95 Disposable Mask

10 157 91 SuperOne N95 舒适型防护口罩 (带阀)
SuperOne N95 Disposable Mask (Valved)

欧标订货号 Ref.: 产品名称 Product

10 158 55 SuperOne EN FFP1 舒适型防尘口罩
SuperOne EN FFP1 Disposable mask

Sperian 标准型防护口罩

- 杯型设计, 与面部有效贴合
- 棉质头带, 吸汗舒适
- Cup design to fit face perfectly
- Soft head stripe to provide comfort

符合美国 NIOSH N95 标准
NIOSH N95 standard

Sperian 801 标准型防护口罩

- 权威医学机构实验证明有效防护禽流感, SARS等病毒
- According to the authoritative studies, it is approved to provide protection against virus of SARS Avian flu, etc.



订货号 Ref.: BC10 055 84

符合美国 NIOSH 标准
NIOSH standard



订货号 Ref.: 32 150 0 小号
Small basic assembly
32 250 0 中/大号
Medium/Large basic assembly

Sperian PREMIER Plus 系列硅胶半面罩
Sperian PREMIER Plus Plus Series Silicone Half Mask

- 独一无二的三围轮廓设计=无可比拟的贴合效果，至臻的舒适体验和极致的防护效果
- PREMIER Plus 系列产品是斯博瑞安集团最顶级的半面罩产品
- 采用顶级硅胶材料，带来前所未有的舒适度，灵活性和耐用性
- 三围轮廓设计适合各种脸型需求
- 侧方呼气阀、滤盒接口设计，增大视野
- 四点支架设计，减少受压点最大程度增加舒适度
- 两种尺寸供选择
- 三围轮廓设计提供极致舒适享受和贴合度
- Triple flange design = superior fit, comfort and protection
- The Survivair PREMIER® Plus is our top-of-the-line half mask respirator. Made of soft silicone, it is extremely comfortable, flexible and durable. A triple flange fits a wide variety of facial types
- Wide, wraparound, pleated silicone facepiece fits a large variety of facial types
- Lateral placement of exhalation valve and cartridge ports enhances field of vision
- Cradle suspension with four-point floating yoke eliminates pressure points to enhance comfort
- Available in two sizes: small and medium/large
- Recommended Use
- A triple flange design provides the ultimate in comfort and superior fit for extended wear

符合美国 NIOSH 标准
NIOSH standard



订货号 Ref.:
31 150 0 小号
Small basic assembly with elastic headstraps
31 250 0 中号
Medium basic assembly with elastic headstraps
31 350 0 大号
Large basic assembly with elastic headstraps

Sperian PREMIER 系列硅胶半面罩
Sperian PREMIER Series Silicone Half Mask

- 超低呼吸阻力完美舒适享受
- PREMIER 是同类产品中最方便使用的产品之一，独特的排汗孔设计减少面罩滑动和彻底消除可能由此引起的皮肤过敏。此高质量硅胶半面罩独有的密封边缘设计给您带来前所未有的舒适享受
- 弹性头带设计易调节
- 无阻碍视野
- 低轮廓设计不妨碍视野
- 业界呼吸阻力最低的产品之一
- 三种尺寸供选择
- 本产品为寻求低呼吸阻力和舒适度呼吸防护设备的专业用户，提供广泛的解决方案
- Low breathing resistance for maximum comfort.
- One of the easiest breathing respirators of its type, the Survivair PREMIER® incorporates a perspiration port to reduce facepiece slippage and skin irritation. This high quality, silicone respirator includes a soft sealing flange with rolled edges for increased wearer comfort.
- Elastic headstraps adjust at the crown for easy fit and unobstructed vision
- Low profile nosepiece allows for compatibility with eyewear
- Lower breathing resistance than most other available models
- Available in three sizes
- Recommended Use
- Ideal for professional users seeking comfort. Low breathing resistance for maximum comfort

符合美国 NIOSH 标准
NIOSH standard



订货号 Ref.:

B25 000 0 小号 Small basic assembly
B26 000 0 中号 Medium basic assembly
B27 000 0 大号 Large basic assembly

Sperian 2000 系列硅胶半面罩 Sperian 2000 Series Silicone Half Mask

- 重量轻, 易维护
 - 佩戴极其舒适的硅胶材料面罩, 经久耐用, 可以长时间使用和清洗
 - 2000系列半面罩产品是业界最轻的半面罩产品之一, 采用创新的设计可以自我调节鼻梁和佩戴角度, 完全满足安全需求和佩戴眼部防护产品的需要
 - 经久耐用, 重量轻, 硅胶材料面罩
 - 顺滑的密封区设计确保适合各种脸型
 - 全新的头带设计减少面罩松动
 - 有三种尺寸供选择
 - 本产品为寻求重量轻的呼吸防护设备的专业用户, 提供广泛的防护
 - Lightweight and easy to maintain
 - With its comfortable silicone facepiece, this durable, user-friendly half mask air purifying respirator can withstand years of washing and use. One of the industry's lightest respirators, the 2000 Series features an innovative yoke design, and an angled, self-adjusting nose bridge to accommodate safety or prescription eyewear
 - Durable, lightweight silicone facepiece construction
 - Large, pliable sealing area for secure fit for almost any facial type
 - Improved yoke and head harness design reduce facepiece slippage
 - Available in three sizes
- Recommended Use
- Professional users who seek a lightweight respirator that will provide protection in a wide variety of applications

滤盒选择 (NIOSH标准) Choosing a Filter (NIOSH Standard)

订货号 Ref.	描述 Description	订货号 Ref.	描述 Description
B10 010 0	有机气体 Organic vapor	10 060 0	汞蒸气或氯气 Mercury Vapor or Chlorine
B10 020 0	酸性气体 Acid vapor	10 080 0	多种气体 Multi-Contaminant
		10 601 0	N95过滤棉 N95 filter
B10 030 0	有机/酸性气体 Organic vapor/ Acid gases	10 500 5	P100滤盒 P100 filter
		10 581 0	多种气体+P100颗粒防护滤盒 Multi-Contaminant + P100 filter
B10 040 0	氨气及衍生物 Ammonia/Methylamine	14 017 4	滤棉支架 Retainer

逃生半面罩在危险出现时及时提供防护
Half-face evacuation mask for immediate protection in case of danger



Sperian Evamasque 符合欧洲EN标准 EN Standard

- 逃生式半面罩
- 配有ABEK1过滤罐
- 配有独立包装外盒存放安全卫生
- 专配与腰带连接的搭扣
- 可与护目镜配合使用
- Half-face escape mask
- Built-in ABEK1 filter
- Hygienically stored in its own container
- Hook for adjustment to a belt
- Can be worn with goggles

订货号: 17 285 00 (Half mask)
Ref. 17 285 55 (可替换滤盒) (Filter)

听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

Sperian 双滤盒半面罩 Sperian Double Filters Half Mask



- 采用EPDM外壳，非常轻便，抗老化性能优越，能与面部良好贴合
- 呼气阀用聚硅酮制成
- 配有可快速松开的调节带
- 可同时配戴眼镜
- Made from EPDM, light weight
- Of good comfort, durable and tight seal
- Adjustable belt
- Can be worn over prescription spectacles at the same time



订货号 Ref.: B290

双滤盒半面罩 滤盒选择表 Filters for double filters half mask

盒体颜色 Color	订货号 Ref.	主要防护 Protection	标准包装 (只/盒) Package(pieces/box)
气体防护			
■	G100	有机蒸气 Organic Vapor	6
■	G104	有机蒸气+酸性气体 Organic + Acid Vapor	6
■	G106	NH ₃ +甲基胺 Ammonia/ Methylamine	6
■	G110	混合气体 Multi-Contaminant	6
粉尘和微粒防护 Dust and particulate (aerosols)			
□	F200	95%过滤效果N95 (固体粉尘) N95 filtering rate	20
■	G404	99.997%过滤效果 (P100) (固体和液态微粒) P100 filtering rate	6
混合气体+粉尘防护 Vapor + particulate			
■ ■	G100 / H404	有机蒸汽+HEPA (P100) Organic Vapor + P100	4
■ ■	G104 / H404	有机蒸汽+酸性气体+HEPA (P100) Organic + Acid Vapor + P100	4
■ ■	G106 / H404	NH ₃ +甲基胺+HEPA (P100) Ammonia/ Methylamine + P100	4
■ ■	G110 / H404	混合气体+HEPA (P100) Multi-Contaminant + P100	4

符合美国 NIOSH 标准
NIOSH standard



Sperian Opti-Fit™ 硅胶全面罩 Sperian Opti-Fit™ Silicone Full Face Mask

- 拥有最完美的贴合度、舒适度和光学效果的硅胶全面罩产品。
- Opti-Fit™ 系列产品提供完美的表现和适应能力。它所具很多价格更高的产品才能具备的功能，帮助你最合理的分担产品的预算。Opti-Fit™ 的面屏完全消除由面屏曲面造成的影像失真，提供最真实的视觉效果。
- 重量轻设计，减轻由工作带来的头部和颈部的疲劳度。三种尺寸供选择几乎可满足所有类型脸型。
- 舒适，耐久性的硅胶裙边设计，五点头带
- 标准口罩鼻罩防雾设计
- 可更换面屏加以高强度防刮涂层。
- 可选购其它配件例如面屏贴膜，防雾布等
- Optimum fit, comfort and superior optics in a full face respirator.
- The Opti-Fit™ offers the ultimate in performance and affordability. With features usually reserved for more expensive respirators, the Opti-Fit™ can help you get the most from your respiratory protection budget. Opti-Fit™ features a distortion-free lens with exceptional view. Lightweight construction reduces head and neck stress even during extended wear. Three sizes fit almost any facial type.
- Comfortable, durable silicone skirt and five-strap suspension
- Nose cup is a standard feature to prevent fogging
- Lens is replaceable and treated with an anti-scratch coating
- Available accessories include clear and tinted lens covers, anti-fog wipes

订货号 Ref.:

75 200 0 小号 Small Opti-Fit APR
76 200 0 中号 Medium Opti-Fit APR
77 200 0 大号 Large Opti-Fit APR

滤盒选择请参考第34页NIOSH滤盒选择表 Referring to the chart on P34



黄色全面罩 COSMO Yellow

- EPDM 材料
- 全景式视野
- 与面部良好贴合
- 可与第35页G系列过滤盒配合使用
- Made of EPDM
- Panoramic field of vision
- Good seal
- Compatible with G series filters on P69

订货号: 17 106 41

滤盒选择请参考第35页NIOSH滤盒选择表 Referring to the chart on P35

符合欧洲EN标准
EN standard



Sperian Opti-Fit™ 硅胶全面罩 Sperian Opti-Fit™ Silicone Full Face Mask

- 特殊处理聚碳酸酯面屏: 耐腐蚀, 防冲击, 高透光率硅胶面罩体, 超常的舒适度, 不会产生由氧化造成的粉末, 维护方便
- 立体视野: 完美无障碍的视觉体验
- 五点式头带, 快速调节
- 硅胶群边与面部完美贴合, 无与伦比的舒适感受
- RD40 接口
- Polycarbonate visor: abrasion resistant, impact resistant, high optical quality
- Inner mask, Silicone: comfortable, prevents misting of visor, easy maintenance valves
- High quality visor: for perfect vision, from head to toe
- 5-point head-harness, ThermoPlastic Elastomer: quick adjustment, high-resistance thermoplastic, mask can be positioned optimally
- Adjustment buckles: removal, resilient
- Silicone face-seal: exceptional comfort, watertight seal
- RD40 connection (EN 148-1)

订货号 Ref.: 17 150 01 小号 Small
17 150 11 中号 Medium
17 150 21 大号 Large

蓝色全面罩 COSMO Blue



- EPDM 材料
- 全景式视野
- 专用传音膜
- 与面部良好贴合
- 可与Sperian RD40接口的所有过滤罐配合使用
- Made of EPDM
- Panoramic field of vision
- Speech diaphragm
- Good seal
- Compatible with all Willson and Fernez RD40 filters

订货号 Ref.: 17 106 43

您最可信赖的过滤罐产品: 外壳坚固不易变形, 耐腐蚀, 使用周期长。

One of the best filtering products: trustworthy, strongly cased, corrosion-proof and durable.

符合欧洲EN标准 EN standard



铝制滤罐 Aluminium Canisters

- RD40 接口
- 防撞击能力强
- RD40 connection
- Shock memory

订货号 Ref.	描述 Description
17 810 95	防催泪瓦斯 CS
17 830 40	A2B2P3
17 831 40	汞 Hg
17 840 00	A2B2E2K2P3
17 850 40	A2B2
17 856 22	A2B2E2K1 P3 NBC, 防生化
17 860 00	P3
17 862 00	碘及放射性颗粒 Iodine and radioactive particulate



塑料滤罐 Plastic Canisters

全新过滤罐系列产品, 符合 EN 标准满足您各种防护需求, 耐腐蚀, 重量轻, 易处理, 功能强大

Latest filter products, meet EN standard, durable, lightweight, easy for disposing and more filters for choosing

- 两种型号备选
- 经济耐用
- 气密实验方便
- RD40 接口
- 可重复使用的过滤罐保护盖防止湿气
- 无金属
- 2 sizes available: normal (250 cm³) & XL (450 cm³)
- Economical
- Easy respirator to fit-test
- RD40 connection
- Re-sealable caps protect from humidity
- Metal-free

订货号 Ref.	描述 Description
BC17 880 00	A2 250 cc
BC17 880 10	B2 250 cc
BC17 880 20	K2 250 cc
BC17 880 75	A2B2 250 cc
BC17 880 05	A2P3 250 cc
BC17 880 15	B2P3 250 cc
BC17 880 25	K2P3 250 cc
BC17 880 70	A2B2P3 250 cc
BC17 881 50	A2B2E2K2 450 cc
BC17 881 55	A2B2E2K2P3 450 cc

正压式空气呼吸器 SCBA

订购热线: 400-600-7758 网站: www.myehs.cn

手柄

三个宽大而舒适的手柄, 充分考虑佩戴手套及运输时的便利性。

Carrying Handles

Three large handles accommodate gloved hands and allow for easy transport.

Air-Pod™ 背架系统

轻便的铝质背架提供了极高的强度和极佳的稳定性。

警报器

可选的三种低气量声音警报器(铃声、平哨或者颤哨), 位于用户容易觉察到的耳朵附近; 在背部的可视的低气量警报器使得在嘈杂的环境中容易识别; 在正面和背面的电池状态指示灯可以在使用之前提供关键的电池信息。

Air-Pod™ Backpack

Choice of three audible low air alarms (bell, plain whistle, warbling whistle) located near the ear for easy detection by the user; visual low air alarm on back for easy identification in high-noise environments; battery status indicator on front and back for critical battery information prior to donning

气瓶固定系统

SpeedChange™ 锁紧和开锁系统保证在最恶劣的条件下能够快速更换气瓶。

Tank Band

SpeedChange™ lock and release system makes for a quick cylinder change-out under the most adverse conditions.

Warrior 系列

我们基于最终用户使用安全、快捷、舒适的每一个细节诉求, 开发出了全新的符合并超越NFPA标准的杰作——Warrior系列产品, 为一线消防战士提供新的利器, 同时也为同行业的产品标准树立了新的标杆。



紧急救援小组/供应商通用的气源接口 (RIC UAC)

背架保护提供了安全性, 消除了突起点。

Rapid Intervention Crew/ Company Universal Air Connection (RIC UAC)

Protected by the backplate for safety elimination as a snag point.

一级减压器

自动防故障设计, 结构简洁可靠; 在背架内得到保护, 以消除突起点。

First Stage Pressure Reducer

Fail-safe design is simple and reliable; protected within the backpack to eliminate snag points.

中央式电源

单一电池舱, 使用四节高电量“C”型碱性电池, 提供所有集成的电子设备的电力, 降低更换电池的频度。

Central Power Source

Single battery compartment, utilizing four “C” alkaline batteries, for all integrated electronics simplifies and reduces frequency of battery change.

握柄

大握柄设计, 即使在佩戴厚重手套的条件下也可轻易被抓到和使用。

Garb Handles

Large grab handles allow easy location and function with gloved hands.

救援索孔

可以承受1,000磅的拉力

Carabiner Attachments

Carabiner attachment points withstand up to 1,000 pounds of pull force for extrication.

背垫系统

柔软的衬垫, 均匀地把重量沿着背部分布, 提高了舒适度。MaxxMotion™ 独特的旋转和枢轴式设计提供了极佳的灵活性。

Hip pad

Large, flexible hip pad distributes weight evenly across the back for added comfort. Unique MaxxMotion™ swivel and pivot design delivers superior mobility.

PASS (位移) 报警器

IntelliPASS 在装置前部和后部安装的声音和可视报警装置提高了被救援人员发现的机会, 无论消防人员跌倒的朝向; 数据记录器将记录最近发生的2,000次报警事件。

PASS Alarms

IntelliPASS™ audible and visual alarms located on front and back of unit increase chance of discovery regardless of the orientation of the fallen firefighter; data logging records the most recent 2,000 events.

CommCommand™ 扩音系统

以清晰的高保真扩音功能为特色, 可选择按键或者免提操作模式。

CommCommand™ Voice Amplification System

Features clear, distortion-free voice amplification with choice of push-to-talk or hands-free operation.

CommCommand

无线射频通讯系统(RCS)

特有的数字射频系统, 提供极端清晰的通讯效果; 同时消除了有线系统造成的被攀挂的危险

CommCommand™ Wireless Radio Communication System (RCS)

Features digital spread spectrum radio frequency for crystal-clear communications; eliminates interface cable snag hazard.



TwentyTwenty® Plus CBRN 面罩

经过光学校正的防雾面屏能够提供不失真的视觉, 无可比拟的周围视角; 柔顺的丁基橡胶贴面提供极好的密封性, 舒适性和耐用性。

TwentyTwenty® Plus CBRN Facepiece

Optically correct anti-fog lens provides distortion-free view, unparalleled peripheral vision; soft butyl rubber skirt furnishes excellent sealing ability, comfort, and durability.

抬头显示系统 (HUD)

宽幅发光二级管式显示器会自动调整亮度, 提供“气表”式的读数, 容易区分; 外部的可视低气量报警器在嘈杂的环境中也能轻易识别。

Heads-Up Display (HUD)

Wide-span LED-style display automatically dims or brightens, offers “gas style readings for easy differentiation; external visual low air alarm for easy identification in high-noise environments.



可选配件: 气瓶

4500psig (300bar) 压力条件下的, 30分钟 (4.7L) 45分钟 (6.8L) 60分钟 (9L) 三种气瓶供选择。

斯博瑞安 Pathfinder™

紧急搜救系统, 通过收集SCBA上超声波发射装置的频率强度确定受伤人员的位置

他就接口:

42英寸长的中压软管配两个接头, 使得消防人员可以在不断开调节阀的情况下共享他们的气源; 也有可选的方便贮存袋。

T8000

- 整体欧标认证，通过严格的 EN137-2006 自给式空气呼吸器标准
- 产品的简易设计及合理布局在研发中严格考虑到中国大范围使用者对呼吸器的使用工作习惯及工作场合
- 整套呼吸器重量只有10.4公斤(含3.8公斤气瓶)，轻便设计方便活动和长时间工作要求
- 可选配置以满足客户对他救及通讯功能的需求
- 可选Survivair 20/20plus 面罩以满足较高要求客户需求
- 产品通过 GA124-2004 及 GB/T 16556-2007 国家标准

值得信赖的呼吸器

整机严格通过连续120万次
可靠性测试，且整机性能稳定。



安全可靠的一级减压系统

- 全新一级减压阀设计，无阀针设计便于维护
- 源于欧州先进设计，结构紧凑，简捷，整个阀体重量仅为700克。
- 高效的他救接口提供和使用者相同的中压流量，满足他救时使用者的空气流量的需求。



高科技高压管设计结合前置报警系统

- 高压管内置，且配置安全泄暴孔，确保使用者安全
- 报警哨前置且提供超过90dB的报警音量，确保使用者和他人能方便察觉



灵活及安全的供气阀接头

- 全新设计的Banjo连接器，方便供气阀的佩戴
- 通过Banjo连接器使中压管的位置紧贴胸前，降低佩戴者使用中压管被勾的危险。



听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



Survivair 20/20plus 高端面罩

- 按美国NFPA（美国国家消防协会）标准生产，且符合EN标准
- 耐高温，且在低温条件下不会变硬变脆，良好的耐化学腐蚀性
- 坚固的供气阀接口，30英尺坠落不碎裂
- 特殊防刮涂层面屏，具超强耐刮擦能力
- 立体型大视野，无视觉失真，享受完美视觉效果
- KAPTON专利材料传音膜，高效的传音效果
- 有头带和KEVLAR头网两种产品供选择满足您不同的要求



PANO 全面罩

- 适用于亚洲人脸型，配戴舒适
- 视野宽阔，安全性更高。面罩密封边缘双层设计，避免环境中的有毒有害气体侵入面罩
- 正压式设计（3毫巴），通过快速插入式接口与供气阀连接，新式呼气阀使得呼气阻力明显降低
- 配有传音膜（侧面传音膜方便使用对讲机），配有快松扳扣系统，头带调节简便
- 配有口鼻罩，降低面罩内呼出的CO₂含量
- 面罩内部气流自动冲刷面屏，以防产生雾气



Small talk 扩音系统



RCS 通讯系统

最简单结构的通讯系统，提供最好的通讯效果

T8000

订货号 产品名称

标准呼吸器

- SCBA805 T8000 标准呼吸器（6.8L luxfer 气瓶，PANO 面罩）
- SCBA825 T8000 标准呼吸器（6.8L luxfer 气瓶，Survivair 20/20plus 面罩）
- SCBA845 T8000 全欧标 标准呼吸器（6.8L 欧标认证气瓶，Survivair 20/20plus 面罩）

9L 呼吸器

- SCBA809 T8000 标准呼吸器（9L luxfer 气瓶，PANO 面罩）
- SCBA829 T8000 标准呼吸器（9L luxfer 气瓶，Survivair 20/20plus 面罩）
- SCBA849 T8000 全欧标 标准呼吸器（9L 欧标认证气瓶，Survivair 20/20plus 面罩）

他救呼吸器

- SCBA805T T8000 他救呼吸器（6.8L luxfer 气瓶，PANO 面罩）
- SCBA825T T8000 他救呼吸器（6.8L luxfer 气瓶，Survivair 20/20plus 面罩）
- SCBA809T T8000 他救呼吸器（9L luxfer 气瓶，PANO 面罩）
- SCBA829T T8000 他救呼吸器（9L luxfer 气瓶，Survivair 20/20plus 面罩）

T8000

- EN 137-2006 certified SCBA
- The SCBA design is based on considering the Chinese working environment and working habit
- Light weight, the total weight only 10.4kg (including 3.8 Kg cylinder), suit for long time wearing.
- Optional configuration available for meeting rescue purpose.
- Optional Survivair 20/20plus mask for high visibility and wide vision
- GA124-2004 and GB/T 16556-2007 certified

SCBA YOU CAN TRUST

SCBA strictly passed 1.2 million breathing tests and works stably.



High technology reducer design

- New design of reducer which easy to maintenance and more safety and stable
- Reducer design from Europe latest technology, simple and stable, total weight only 700g
- High efficiency rescue outlet providing high air flow for rescue purpose



High technology HP hose with chest whistle

- Built in HP hose with exposure hole outside
- Chest whistle provide more than 90dB alarm



Flexible Banjo connector

- New Banjo connector provide more flexibility when wearing the demand valve
- Banjo connector make the MP hose more close to chest to avoid any danger of hose being hooked.





Survivair 20/20plus mask

- Meet EN 136 and NFPA standard
- Does not soften, melt, or burn in high heat or direct flame
- Does not stiffen or become brittle in cold
- Wide range of chemical resistance
- Able to withstand drop of 30 feet onto concrete without breaking
- Durable, scratch resistant lens
- Distortion-free lens with exceptional view
- Kapton® speaking diaphragm, effective local voice transmission
- Optional Head net



PANO Mask

- Especially designed for Asian people
- Panoramic field of vision
- Speech diagram
- Good anti-fog performance thanks to the cool air pulsed into the mask



Small talk

Amplifying system with loudspeaker



RCS system

Communication system with simplest parts and best communication quality, in the market, thus letting people communicate in fire fighting

T8000

SKU	Description
Basic Unit	
SCBA805	T8000 SCBA (6.8L Luxfer Cylinder, PANO Mask)
SCBA825	T8000 SCBA (6.8L Luxfer Cylinder, Survivair 20/20plus Mask)
SCBA845	T8000 full EN certified SCBA (6.8L EN certified Cylinder, Survivair 20/20plus Mask)
9L Cylinder	
SCBA809	T8000 SCBA (9L Luxfer Cylinder, PANO Mask)
SCBA829	T8000 SCBA (9L Luxfer Cylinder, Survivair 20/20plus Mask)
SCBA849	T8000 full EN certified SCBA (9L EN certified Cylinder, Survivair 20/20plus Mask)
With buddy breather	
SCBA805T	T8000 SCBA with buddy breather (6.8L Luxfer Cylinder, PANO Mask)
SCBA825T	T8000 SCBA with buddy breather (6.8L Luxfer Cylinder, Survivair 20/20plus Mask)
SCBA809T	T8000 SCBA with buddy breather (9L Luxfer Cylinder, PANO Mask)
SCBA829T	T8000 SCBA with buddy breather (9L Luxfer Cylinder, Survivair 20/20plus Mask)

C900/C850



PANO 全面罩 PANO Mask

- 适用于亚洲人脸型，配戴舒适
- 视野宽阔，安全性更高。面罩密封边缘双层设计，避免环境中的有毒有害气体侵入面罩
- 正压式设计（3毫巴），通过快速插入式接口与供气阀连接，新式呼气阀使得呼气阻力明显降低
- 配有传音膜（侧面传音膜方便使用对讲机），配有快松扳扣系统，头带调节简便
- 配有口鼻罩，降低面罩内呼出的CO₂含量
- 面罩内部气流自动冲刷面屏，以防产生雾气
- Especially designed for Asian people
- Panoramic field of vision
- Speech diagram
- Good anti-fog performance thanks to the cool air pulsed into the mask



供气阀 Demand Valve:

- 独一无二的快速插接式设计，使用简便，供气迅速
- 体积小，重量轻，保证极佳的下视野
- 呼吸舒适轻松，最大供气量可达到450升/分钟以上，保证面罩内正压（3毫巴），更安全可靠
- 通过旋转式接口与中压管相连，更换方便
- Unique quick-connecting demand valve, supplies the air automatically when connected to the mask
- Small and light, good down vision
- Comfortable breathing, maximum supply flow rate is higher than 450L/MIN, always keeping a positive pressure in the mask

听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection


气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

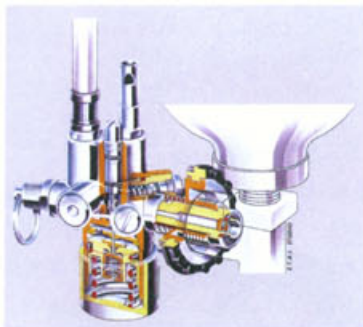

减压器 Pressure Reducer:

- 结构简单可靠, 压力补给型, 保持中压循环系统中的持续压力 (7巴) 及流量 (>450升/分钟)
- 可扩展型, 能接单瓶或双瓶
- 配有泄压安全阀, 当中压回路中压力大于11巴时自动泄压, 保证使用者安全
- 配有便捷式手轮, 用于装卸气瓶
- 配有他救接口, 可接面罩式通风头罩, 供抢救第二方时呼吸用
- Simple structure, keeps the Medium Pressure system at 7 bars
- Special design, able to accept 2 cylinders
- Safety valve, to ensure that the pressure of the MP hose is always lower than 7 bars
- Additional "buddy breather": can be equipped with two masks for rescuing an endangered person



C900

5 C900 使用 Luxfer专业碳纤维瓶:

C900 SCBA: Luxfer professional carbon cylinder

- 4.7L可使用约30分钟; 6.8L可使用约45分钟; 9L可使用约60分钟
- 瓶口螺纹制式: M18x1.5。符合HSE-ALFW 1、HSE-AL-FW2、prEN12245标准
- 气瓶带橡胶底衬, 保护气瓶表面免受损伤
- 4.7L for 30 minutes; 6.8L for 45 minutes; 9L for 60 minutes
- Connector for cylinder: M18*1.5; meets HSE-AL-FW1, HSEALFW2, PREN12245 standards
- With cylinder protection pad and bag



C850

C850 使用 高可靠性国产碳纤维气瓶:

C850 SCBA: Reliable local cylinder

- 6.8升可使用约45分钟
- 气瓶带橡胶底衬, 保护气瓶表面免受损伤
- DOT-CFFC-2000标准
- 6.8L for about 45 minutes duration (actual using time)
- With cylinder protection pad
- Meets DOT standard

C900

订货号	产品名称	Description
SCBA105	C900 正压式空气呼吸器 (6.8L LUXFER碳瓶)	C900 SCBA (6.8L Luxfer carbon cylinder)
SCBA108	C900 正压式空气呼吸器 (4.7L LUXFER碳瓶)	C900 SCBA (4.7L cylinder)
SCBA123	C900 正压式空气呼吸器 (6.8L LUXFER碳瓶带表瓶阀)	C900 SCBA (6.8L Luxfer carbon cylinder with Gauge)
SCBA124	C900 正压式空气呼吸器 (6.8L LUXFER碳瓶双瓶)	C900 SCBA (Double 6.8L Luxfer carbon cylinders)
SCBA126	C900 正压式空气呼吸器 (9L LUXFER碳瓶)	C900 SCBA (9L Luxfer carbon cylinder)

C850

订货号	产品名称	Description
SCBA205	C850 正压式空气呼吸器 (6.8L 国产碳瓶)	C850 SCBA (6.8L local carbon cylinder)
SCBA215	C850 正压式空气呼吸器 (6.8L 国产碳瓶带表瓶阀)	C850 SCBA (6.8L local carbon cylinder with Gauge)

COUGAR 空气呼吸器 SCBA

1 背架 Back Pack

- 该呼吸器 Mightylight 型背架是业内最轻巧、强度最高的一种
- 按人体工程学原理设计，选用高强度塑料和抗冲击性能优异的碳纤维注塑成型。它既防静电又能有效地隔绝高温。同时，最大限度地考虑了佩戴舒适性，骨盆支撑和宽大的折叠式腰部护翼设计大大改善了呼吸器的重量分布，更使作业活动不受任何限制
- 阻燃型的聚酯尼龙背带可以方便地从背架上卸下以便清洁维护
- The mighty-light back pack is one of the lightest and strongest in the industry.
- The design of the backpack based on the figure of the human being, the purpose is the perfect fit to the body. It also adopt the high intensity material which can not only anti the static but also isolate the high temperature. Meanwhile the comfort is another key point for this instrument the special wing design of the waist belt greatly decentralize the weight points, which improve the flexibility of the end users.
- Flame proof harness belt can be easily unpicked and washed.



2 压力表 Pressure Gauge

- 可任意角度旋转便于察看，特有的夜光显示即使夜间也可以清晰读数
- Easy to read and can be used at night

订货号 Ref.	描述 Description
SCBA305	COUGAR 正压式空气呼吸器 45分钟 SURVIVAIR 原装碳瓶 COUGAR SCBA 45mins fully imported SURVIVAIR cylinder
SCBA325	COUGAR 正压式空气呼吸器 45分钟 SURVIVAIR 原装碳瓶防自锁 COUGAR SCBA 45mins fully imported SURVIVAIR cylinder with locking wheel
SCBA345	COUGAR 正压式空气呼吸器 60分钟 SURVIVAIR 原装碳瓶 COUGAR SCBA 60 mins fully imported SURVIVAIR cylinder with locking wheel

面罩 Mask

- 未来增强型硅橡胶面罩，提供了无以伦比的面部舒适性，即使在极冷、极热的情况下该面罩柔软、坚固耐用，不易老化，不会引起皮肤过敏
- 五根可调节头带，保证最佳密封
- 优化设计后的面罩镜片进一步增大了可视范围，镜片光学性能极佳，防雾，耐划伤，面罩更符合面部曲线，降低了脸部疲劳程度
- Silicone rubber Durable will not oxidize or react with Ozone
- Unsurpassed comfort, even in extreme heat or cold
- Five-strap harness and skirt with better sealing ability for better comfort and fit
- Improved lens expands the vision, with optical treatment, anti fog properties, and anti scratch abilities



供气阀 Demand Valve

二级压力调节供气阀采用专利“Air-Klic”接口技术，可以以任意角度与面罩连接，操作简单、可靠，其红色的旁通旋钮可以随时调节辅助供气流量，并在二级调节气阀失灵时提供空气或作为补充供气

The second stage adjustment adopts the patented “Air-Klic” connector, can be connected with the mask at any angle, easy to use and with red screw to adjust the additional flow



气瓶 Cylinder

- 新型的活口气瓶托架，坚固耐用，装卸方便快捷
- 瓶阀上面带双面荧光可视压力表，方便检查气瓶余气
- 可选购特有的止逆阀保证一旦打开瓶阀后不会因为误操作而切断供气
- Durable cylinder bracket, easy to install or unpick the cylinder
- Double cylinder valves with nightlight function, easy to check the pressure at any time
- Optional locking handwheel prevent the cylinder valve from being closed accidentally




工业/消防用呼吸器, PANTHER

为了充分保护消防人员的生命安全, 美国对于呼吸器产品的认证有着严格的分工:

- NIOSH (美国职业安全健康中心) 仅负责工业用呼吸器相关标准的制定, 且严禁将工业用呼吸器产品用于消防战斗
- NFPA (美国消防协会) 负责消防行业呼吸器产品相关标准的制定, 对呼吸器各方面的性能都提出了更高的要求

In order to ensure the safety of different end users, the USA have 2 kinds of organizations to set up the standards

- NIOSH: responsible for setting up product standards for industry only
- NFPA: responsible for setting up product standards for fire-fighting only

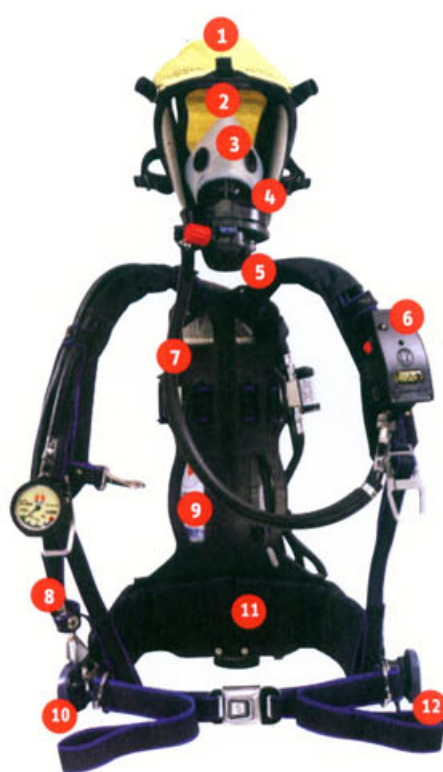

- 1 “Kevlar 头网” 面罩, 同时有硅树脂材料头带产品供选择
Kevlar Headnet, also available with silicone head strap
- 2 “Twenty twenty” plus 硅树脂面屏三种尺寸供选择
Twenty Twenty plus Silicone facepiece available in three sizes
- 3 口鼻罩, 三种尺寸供选择
Nose cup available in three sizes
- 4 “HUD (抬头显示)” 持续的压力读数, 3种低气量报警模式
Head-Up Display with continuous pressure reading and 3 low air alarms
- 5 二级调节器, 与面罩轻松连接
Second stage regulator attaches to and detaches from facepiece quickly and easily
- 6 可选的“COMPASS” 位移报警装置
Optional COMPASS integrated PASS device
- 7 硅树脂护套保护充气管路和电路系统
Silicone extrusion protects pneumatic hose and electronic cable
- 8 可选的压力表
Optional analog pressure gauge
- 9 手提手柄
Carrying handles for easy transportation
- 10 可选的双重装置, (他救接口) 供同伴呼吸使用
Optional dual fitting that allows buddy breathing without regulator disconnection
- 11 HIGH PAD 衬垫给使用者最大的舒适感
Hip pad for maximum comfort
- 12 “二级调节器”座
Regulator holder to store regulator in standby mode

经 NFPA 认证的领先科技

Key features of NFPA

HUD电子压力显示及报警系统：SURVIVIAIR Panther呼吸器让我们开始在面罩里看压力!!!

HUD system: Head Up Display system, the second electronic pressure display system allows the user to see the pressure of its cylinder in the mask



位移报警系统

COMPASS system

让救援人员知道自己受伤的同伴在哪里

Let the rescuing persons know where the injured and the unconscious are



Small talk扩音系统

Small talk

Amplifying system with loudspeaker



RCS通讯系统

RCS system

最简单结构的通讯系统，提供最良好的通讯效果

Communication system with simplest parts and best communication quality, in the market, thus letting people communicate in fire fighting



RIT KIT

RIT KIT救援包可提供复杂危险环境的快速解决方案。因为它是手提式的所以也可用于密闭空间的救援

The RIT Kit was designed to offer rapid intervention teams a comprehensive, well-organized rescue package to address most circumstances they might encounter. Due to its portability, the RIT Kit also works well for confined-space rescue



订货号 Ref.: BC11 820 11

Evapack 逃生呼吸器/消防指挥员呼吸器 Evapack Escaping SCBA

- 恒流式逃生空气呼吸器, 带有1个2升300巴带压力表气瓶, 可使用约15分钟
- 1 cylinder with cylinder valve, 2 liters capacity with 300 bar pressure. It can be used for 15 minutes, small standard SCBA with cylinder gauge and demand valve



订货号 Ref.: BC11 820 31

消防指挥员呼吸器(背心式) SCBA For Director Of Fire Fighting

- 自给式呼吸器, 带有1个2升300巴带压力表气瓶, 可使用约15分钟
- 1 cylinder with cylinder valve, 2 liters capacity with 300 bar pressure. It can be used for 15 minutes, the cylinder is on the back, not necessary to bear it in the hands



订货号 Ref.: BC11 820 21

Auto Pack 逃生呼吸器 Auto Pack Escaping SCBA

- 恒流式逃生空气呼吸器, 带有1个2升300巴带压力表气瓶, 可使用约15分钟
- 1 cylinder with cylinder valve, 2 liters capacity with 300 bar pressure. It can be used for 15 minutes, the hood can protect the whole head

正压式供气呼吸防护系统 Supplied Air Equipment



订货号 Ref.: 17 629 83

MC95 With EPDM Panoramasque

- 调节和输送由压缩空气装置提供的持续气流
- 可与EPDM黑面罩直接相连
- 超大视野
- 超强的密封性, 佩戴舒适, 重量轻, 高呼吸容量 (降低呼吸阻力及疲劳程度)
- 气流调节量: 120L/分-300L/分
- 最小输入气压: 5 bars
- Compressed air device with continuous flow
- Screws directly onto the EPDM Panoramasque
- Very wide field of vision (methacrylate lens)
- Ultra tight, comfortable, lightweight, high respiratory capacity
- Flow adjustment from 120 to 300 litres/min
- Supply: minimum 5 bars



移动供气源 Compressed Air Trolley

- 用于长时间工作的自给式呼吸装置。带有2套呼吸装置（面罩+供气阀），绕有30米软管的轮盘，4个充装了30MPa压缩空气的气瓶
- 通过不同的选择可装配合2L逃生呼吸器的逃生装置
- 逃生装置内涵自动气源切换阀，在出现意外的情况下自动切换至逃生呼吸器
- For narrow spaces; long time working condition---supplied air system.
- Equipped with: 2 breathing packages (mask+ demand valve) 30 meters long pipe, 4 fully filled compressed carbon cylinders
- Escape SCBA system is optional, system come with a automatic switcher valve which can realize the automatic switch to escape SCBA when continuous air supply cannot working

SKU	描述	移动小车	PANO 面罩 + 供气阀	腰带供气 系统	逃生系统	气瓶
BC1766010	移动小车全配型 (含4个Luxfer 6.8L气瓶)	x1	x2	x2	x2	6.8L Luxfer气瓶 x 4
BC1766011	移动小车全配型 (含4个国产 6.8L气瓶)	x1	x2	x2	x2	6.8L 国产气瓶 x 4
BC1766012	移动小车全配型 (含4个Luxfer 9.0L气瓶)	x1	x2	x2	x2	9L Luxfer气瓶 x 4
BC1766013	移动小车标准型 (不含气瓶)	x1	x2		x2	无
BC1766014	移动小车经济型 (不含气瓶)	x1	x2	x2		无
BC1766015	移动小车经济型 (不锈钢车体, 不含气瓶)	x1(不锈钢)	x2	x2	无	
升级套装						
BC1766500	逃生系统升级套装 (用于经济型升级至标准型或全配型)					

SKU	Description	Air trolley	PANO mask +demand valve	Belt air supply system	Escape SCBA (2L cylinder)	Cylinders on air trolley
BC1766010	Air trolley full equipped system (With 4 Luxfer 6.8L cylinders)	x1	x2	x2	x2	6.8L Luxfer cylinder x 4
BC1766011	Air trolley full equipped system (With 4 local 6.8L cylinders)	x1	x2	x2	x2	6.8L local cylinder x 4
BC1766012	Air trolley full equipped system (With 4 Luxfer 9.0L cylinders)	x1	x2	x2	x2	9L Luxfer cylinder x 4
BC1766013	Air trolley standard system (Without cylinder)	x1	x2		x2	N/A
BC1766014	Air trolley basic system (Without cylinder)	x1	x2	x2		N/A
BC1766015	Air trolley basic system (stainless steel air trolley Without cylinder)x1(stainless steel) x2			x2		N/A
Upgrade Kit						
BC1766500	Escape SCBA system for upgrade basic system to standard system or full equipped system					

DE 4

- 配有三个过滤器，过滤水份，油份和直径大于5微米的固体气溶胶
- A级活性炭层，超强过滤能力，滤除更细小油蒸气 (>0.01 微米) 和气味
- 网路压力必须在5-12bars之间
- 可同时供四人使用
- 每个输气口最小气流量为600L/分钟 每个输气口最大气流量为1200L/分钟
- 自动净化功能
- 网路输入接口有：例如 STAUBLI RBE11
- 网路输出接口（与其他安全防护产品相联的）有：例如 STAUBLI RBE 6
- 材料：铸铝
- 重量：9 kg
- Equipped with 3 filters to remove water, oil and solid aerosols > 5 microns
- Class A carbon layer to remove the finest oil vapours (> 0.01 micron) and odours
- Network pressure must be between 5 and 12 bars
- Possible supply for 4 pieces of equipment simultaneously
- Minimum flow rate guaranteed for each outlet - 600 litres/min
Maximum flow rate guaranteed for each outlet 1200 litres/min
- Automatic purge
- Connection to Network: STAUBLI RBE 11
- Connection to PPE: STAUBLI RBE 6
- Material: cast aluminium
- Weight: 9 Kg

四路供气过滤系统 4-outlet air filtration unit



订货号 Ref.: BC17 635 25



> > > 订购热线：400-600-7758 网站：www.myehs.cn

单一气体检测仪

Single-Sensor Gas Monitors

55

多气体检测仪

Multi-Sensor Gas Monitors

59

SCBA 自动综合检测仪

SCBA Performance Tester

67



很多情况下，人们需要在储油罐、船舱、锅炉、下水道、隧道、输送管道、陷阱、地窖、水容器、船货仓等密闭空间进行焊接、喷漆、维修等工作，这类场合由于并非为人们长期工作所设计，出入口空间比较有限，非常容易存在中三种基本危害：

- 缺乏氧气或氧气过多，当氧气含量为
 - 19.5% - 12%时，人将出现判断力降低，呼吸及脉搏加速，疲乏，各器官协调能力丧失。
 - 12% - 10%时，人将处于该环境下几秒至几分钟，便会出现呼吸作用失常，身体循环能力减弱，更加疲乏，辨别能力丧失 等症状
 - 10% - 6%时，人将出现恶心，呕吐，行动困难，失去意识，死亡
 - 6% - 0%时，将出现抽搐，呼吸作用衰竭，呼吸停止，心跳停止，以上症状会立即显现，几分钟内死亡
- 有潜在的有毒污染物如CO、H2S

CO 是美国中毒事故中的首要诱因！CO 所引起中毒事故的机会远胜于其他任何化学物质，即使是在极低的浓度下慢性接触也是有害的。65%的密闭空间死亡事故是由有害气体造成的。
- 有可燃性气体或蒸汽 (LEL)

因此，进入密闭空间前，确认其中的气体安全是非常重要的，同时还需要通风保障气体安全。

气体检测仪能够提供密闭空间内各类气体实时的浓度读数，并在读数到达危险阈值时发出声光报警，确保操作人员的安全。



公司质量体系通过 ISO9001:2000 认证



欧洲质量认证



美国UL认证



DEMKO 国际认证



ToxiPro™ 单一气体检测仪

ToxiPro是一款性能优良且价格实惠的产品。ToxiPro气检测仪用途广泛，持久耐用，可以显示时间，峰值，STEL，TWA，并带有黑匣子数据记录功能。同时ToxiPro还可选用功能强大的数据记录器更加方便的获取数据。

采用先进的检测技术，集众多优点于一身。使用方便，价格低廉，绝对物超所值！

可视报警/红外接口

- 1 声音报警传
- 2 传感器口
- 3 模式按键
- 4 液晶显示
- 5

ToxiPro 机型

订货号	含探头
54-45-90	O ₂
54-45-01	CO
54-45-02	H ₂ S
54-45-21	NH ₃
54-45-18*	Cl ₂

ToxiPro 配件

订货号	描述
54-46-104	手动采样套件

技术参数

仪器类型	可更换电池和传感器
尺寸 (长*宽*高)	8.4*5.5*2.9cm
重量	110g
报警	厂家设置的两个报警值，还有瞬时暴露限制值STEL和时间加权平均值TWA (可通过BioTrak软件选择功能)
声音报警	92分贝双音调高声报警
可视报警	红色发光二极管
显示背景灯	按钮激活
振动报警	可选
控制	一键操作，包括标定
皮带扣	鳄鱼型衣扣 (皮带扣和可旋转皮带扣同样可选)
电池寿命	超过9000小时 (约1年)
外壳	TPE材质
耐受力 (IP等级)	IPX5/IPX7防水等级
安全性	已获得UL防爆认证
事件记录	20个事件，包括起始时间，终止时间，持续时间，最高值，平均读数
数据记录器	一分钟的采样间隔下可以记录约连续120小时数据 (时间间隔可以通过BIOTRACK软件调整，需要红外接口)
标准配置	标定适配器，软管，操作指导
读数	时间，峰值，瞬时暴露限制值STEL和时间加权平均值TWA以及读数记录时间

ToxiPro 探头

订货号	描述	检测范围	检测精度
54-47-90	O ₂	0-30%/VOL	0.1%VOL
54-47-01	CO	0-1000 PPM	1PPM
54-47-02	H ₂ S	0-200 PPM	1PPM
54-47-21*	NH ₃	0-100 PPM	1PPM
54-47-18*	Cl ₂	0-20 PPM	0.1PPM

* 对于没有specific标志的氯气探头，可以测量多类型的气体，如果有specific标志的氯气探头，则只能检测特定的气体。



ToxiPro™ Single-Sensor Gas Monitors

ToxiPro provide more features at a lower cost than any other single gas detector on the market. ToxiPro is a fully serviceable, reusable gas detector with realtime, peak, STEL, and TWA readings, as well as a black box recorder. A fully enabled datalogger is also available for the ToxiPro.

Sophisticated detection technology. The widest array of features. Easy to use, with the lowest cost of ownership in the gas detection market.

- 1 Visual Alarm (LED)/IrDA Port
- 2 Audible Alarm Port
- 3 Sensor Port
- 4 Mode Button
- 5 LCD Display

ToxiPro configuration

Ref.	Sensor Installed
54-45-90	O ₂
54-45-01	CO
54-45-02	H ₂ S
54-45-21	NH ₃
54-45-18*	Cl ₂

ToxiPro 配件

Ref.	Description
54-46-104	manual sample draw kit

ToxiPro Sensors

Ref.	Description	Range	Resolution
54-47-90	O ₂	0-30%/VOL	0.1%VOL
54-47-01	CO	0-1000 PPM	1PPM
54-47-02	H ₂ S	0-200 PPM	1PPM
54-47-21*	NH ₃	0-100 PPM	1PPM
54-47-18*	Cl ₂	0-20 PPM	0.1PPM

* The non specific Cl₂ sensor can be used for the detection of both gases. The specific Cl₂ sensor is designed for the target gas only.

TECHNICAL SPECIFICATIONS

Instrument Type	Replaceable battery and sensor
Dimensions	8.4 x 5.5 x 2.9 cm (3.3 x 2.2 x 1.2 in)
Weight	110 g (3.9 oz)
Alarms	Two factory-set alarm levels, plus STEL and TWA. (Can be changed with optional BioTrak software).
Audible Alarm	Loud warbling two-tone alarm rated at 92 dBA
Visual Alarm	Bright Red LED.
Display Backlight	Activates with button.
Vibrating Alarm	Optional
Controls	One button operation, including calibration
Clip	Alligator clip standard (belt clip or swivel "cell phone" style also available).
Battery Life	Up to 9000 hrs. (Approximately 1 year).
Housing	Clear polycarbonate with thermal-swivel plastic elastic (TPE) overmold.
Durability (IP Rating).	Meets IPX5 / IPX7 water rating.
Intrinsic Safety	c-UL-us Classified for Class I, Division 1, Group A, B, C, D hazardous locations; international certifications pending
Event Logger	20 Events, includes start time, end time, duration, peak and average readings
Datalogging	Approx. 120 hrs @ 1 min. interval (Interval can be changed with optional BioTrak software, IrDA required).
Standard Accessories	Calibration adapter, hose, operators guide and quick reference card
Readouts	Real-time, peak, STEL, TWA and time of day Readings

V
V
V
听力防护系列
眼脸部防护系列
呼吸防护系列
气检测仪系列
手部防护系列
防护服系列
足部防护系列
坠落防护系列

ToxiVision 使用简便,性能优越,价格实惠,有效提高您的工作效率

ToxiVision 单一气体检测仪



抗射频干扰

特殊的射频干扰防护屏可以抵抗双路射频以及其它电子装置的干扰,抗射频干扰能力达40V/m。可以在更广阔的领域应用。

显示屏的尺寸

显示屏非常大,几英尺之外都能看清。

坚固

镀铬的外壳可以抵抗腐蚀性气体(如H₂S)。ToxiVision经过真空测试,确保防水等级达到IPX7级

单键操作

即使戴着笨重的手套,也很容易用这个大的单键进入所有功能

校验

单键操作超乎寻常的快和容易

ToxiVision 机型

订货号	含探头
54-37-90	O ₂
54-37-01	CO
54-37-02	H ₂ S
54-37-80A	LEL碱性电池
54-37-80N	LEL充电电池

ToxiVision 配件

订货号	描述
54-38-06	手动采样泵

技术参数

尺寸(长x宽x高)	8.9x6.4x3.25 cm
重量	190g
报警	出厂设定两个报警点(每种探头不同,可通过RS232更改)
声音报警	双声调交替鸣响,92分贝
发光报警	红色发光二极管
显示屏背景灯	用按键开启
选装的振动报警	用于噪音很大的环境
安全闪烁	设定后,发光二极管每分钟闪烁一次,证明仪表处于工作状态
控制	单键校验
外壳	镀铬ABS,防射频干扰能力达40V/m
皮带夹	固定于仪表上的皮带夹
电池使用时间	4000小时以上(2节5号碱性电池)
耐用性	符合IPX7防水等级
显示	超大液晶显示屏
标准附件	校验适配器和软管
STEL(短时暴露平均值)	通过RS232电缆可选择开启
/TWA(时间加权平均值)	

ToxiVision 探头

订货号	描述	检测范围	检测精度
54-39-90	O ₂	0-30%/VOL	0.1%VOL
54-39-01	CO	0-1000 PPM	1PPM
54-39-02	H ₂ S	0-200 PPM	1PPM

The ToxiVision is simple to use and will save you time and money through specially designed premium features



ToxiVision Single-Sensor Gas Monitors

RFI protection

The special RFI shielding prevents operating interference from two-way radios and other electronic devices providing RFI immunity to 40v/m. This allows proper operation in a wider range of environments.

Display size

The display is very large and can be seen easily from several feet away.

Ruggedness

The chrome metal-plated case makes the Toxi Vision resistant to corrosive gases (e.g., H₂S) The Toxi Vision is also vacuum-tested to ensure water tightness and has a rating of IPX7.

One -button operation

The large, single button makes for easy access to all functions,even when wearing bulky gloves.

Calibration

An incredibly quick and easy one-button process.

ToxiVision configuration

Ref.	Sensor Installed
54-37-90	O ₂
54-37-01	CO
54-37-02	H ₂ S
54-37-80A	LEL Alkaline
54-37-80N	LEL Rechargeable

ToxiVision Accessories

Ref.	Description
54-38-06	manual sample draw kit

ToxiVision Sensor

Ref.	Description	Range	Resolution
54-39-90	O ₂	0-30%/VOL	0.1%VOL
54-39-01	CO	0-1000 PPM	1PPM
54-39-02	H ₂ S	0-200 PPM	1PPM

TECHNICAL SPECIFICATIONS

Dimensions	3 1/2"(8.9CM)x2 1/2" (6.4CM)x1 1/4" (3.25CM)
Weight	6.7oz.(190g)
Alarms	Two factory-set alarm levels(different for each sensor;can be changed thru RS232)
Audible Alarm	Loud warbling two-tone alarm rated at 92 dBA
Visual Alarm	Bright Red LED alarm
Display backlight	Activates with button
Optional Vibrator alarm	For high noise environments
Security Flash	LED falshes once per minute to verify instrument operation when set
Controls	One button calibration
Housing Chrome	Metal plated,RFI resistant ABS with immunity to 40V/m
Clip Built	In steel clip
Battery Life	Up to 4000hours(2 disposable AA alkaline batteries)
Durability	Meets IPX7 water standard
Display	Oversized Liquid Crystal Display
Standard Accessories	Calibration adapter and hose,operators guide
STEL/TWA	Optionally enabled via RS232 cable

听力防护系列

眼部防护系列

呼吸防护系列

气检测仪系列

手部防护系列

防护服系列

足部防护系列

坠落防护系列



MultiPro™ 密闭空间多气体检测仪

MultiPro™ 是一款小型的密闭空间复合式多气体检测仪。它具有很多优良性能且价格低廉。可同时显示4种气体读数, 单键操作和标定, 方便读数的液晶显示屏, 声光报警, 事件记录器, 红外端口, 可选样品采样泵, 防滑, 简洁, 便宜, MultiPro™ 全都具备! 3传感器4个通道可以满足你检测O₂, LEL还有CO(或H₂S)气体的需求, 当然, 你也可以使用Biosystems创新式的双通道传感器Duo-Tox, 同时检测CO和H₂S气体。这种Duo-Tox传感器实际上是两个毒气传感器包含于一个传感器之中, 使你在三个位置中具有4个通道直接检测气体——没有交叉反应。

MultiPro™ 具有防滑的聚碳酸酯橡胶外壳, 坚固耐用, 并且碱性电池盒和锂电池盒可以相互更换, 可选采样泵以及其他一系列附件。它已经成为市场上一款功能齐全且物美价廉的气检测仪。

MultiPro 机型

订货号	探头 (碱性电池)
54-48-100A	LEL
54-48-300A	LEL / O ₂
54-48-301A	LEL / O ₂ / CO
54-48-302A	LEL / O ₂ / H ₂ S
54-48-314A	LEL / O ₂ / Duo-Tox (CO/H ₂ S)

订货号	探头 (NiMH充电电池)
54-48-100N	LEL
54-48-300N	LEL / O ₂
54-48-301N	LEL / O ₂ / CO
54-48-302N	LEL / O ₂ / H ₂ S
54-48-314N	LEL / O ₂ / Duo-Tox (CO/H ₂ S)

MultiPro 配件

订货号	描述
54-49-102	自动采样泵
54-49-105	手动采样泵套件

MultiPro 探头

订货号	描述	检测范围	检测精度
54-49-80	LEL	0-100% LEL	1% LEL
54-49-90	O ₂	0-30%/VOL	0.1%
54-49-01	CO	0-1000 PPM	1PPM
54-49-02	H ₂ S	0-200 PPM	1PPM
54-49-14	Duo-Tox(CO/H ₂ S)		

主要特点

设计

- 简洁防滑
- 单键操作
- 背景灯显示方便读数
- 超模压保护罩
- IPX5防水等级

可选采样泵

- 软件控制
- MultiPro 电池供电
- 自动低流量报警
- 每次使用前自动泄露测试

记录

- 自动事件记录(20个事件, 包括传感器类型, 最大值, 平均值, 时间和持久性)
- 黑匣子记录器可记录40小时数据
- 可选的数据记录器可以更加方便的将数据导入电脑

智能传感器和标定

- 三传感器。氧气, LEL以及Duo-Tox双通道CO / H₂S传感器
- 可更换型传感器
- 单键操作自动标定
- 标定提醒
- 标定过程中可以通过传感器量程指示进行预测性维护

电池

- 碱性电池盒和充电电池盒可以相互更换
- 最长使用时间可达24小时
- 插入式充电器
- 充电时间少于5个小时

听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



MultiPro™ Multi-Sensor Gas Monitors

MultiPro™ is packed with features and offered at a price you won't believe. Real time readings of up to four gases simultaneously, one button operation and calibration, easy-to-read LCD display, audible and visual alarms, event logger, IrDA port, optional sample draw pump, rugged, compact and affordable – Biosystems' new MultiPro™ Confined Space Gas Detector does it all. And MultiPro can be configured for your needs. Three sensors and up to four channels let you monitor O₂, LEL, and either CO or H₂S, or using Biosystems' innovative Duo-Tox dual channel sensor, measure CO and H₂S simultaneously. Biosystems' Duo-Tox is actually two toxic gas sensors in a single sensor housing, giving you four channels of direct detection in the space of three – without cross interference. Plus, MultiPro™ is built tough. Ruggedly constructed of an engineered polycarbonate with a rubber overmold, MultiPro goes where you go, and back. Interchangeable Alkaline (3 AA) and Li-Ion battery packs, an optional sample draw pump, and a range of accessories make MultiPro the most versatile and most affordable gas detector on the market today.

MultiPro configuration

Ref.	Sensor Installed (Alkaline)
54-48-100A	LEL
54-48-300A	LEL / O ₂
54-48-301A	LEL / O ₂ / CO
54-48-302A	LEL / O ₂ / H ₂ S
54-48-314A	LEL / O ₂ / Duo-Tox (CO/H ₂ S)

Ref.	Sensor Installed (Rechargeable)
54-48-100N	LEL
54-48-300N	LEL / O ₂
54-48-301N	LEL / O ₂ / CO
54-48-302N	LEL / O ₂ / H ₂ S
54-48-314N	LEL / O ₂ / Duo-Tox (CO/H ₂ S)

MultiPro Accessories

Ref.	Description
54-49-102	continuous sample pump
54-49-105	manual sample draw kit

MultiPro Sensor

Ref.	Description	Range	Resolution
54-49-80	LEL	0-100% LEL	1% LEL
54-49-90	O ₂	0-30%/VOL	0.1%
54-49-01	CO	0-1000 PPM	1PPM
54-49-02	H ₂ S	0-200 PPM	1PPM
54-49-14	Duo-Tox(CO/H ₂ S)		

KEY FEATURES

DESIGN

- Compact and rugged.
- One button operation.
- Easy to read front mounted backlit display.
- Over-molded boot.
- Meets IPX5 standard.

OPTIONAL SLIP-ON PUMP

- Software controlled pump.
- Powered by the MultiPro battery
- Automatic low flow alarm.
- Automatic leak test before every use.

RECORDING

- Automatic event logger (20 events, including sensor type, max, average, time and duration).
- Black-Box recorder with over 40 hours of storage.
- Available with optional datalogging for convenient and easy downloading to a computer.

SMART SENSORS AND CALIBRATION

- Three sensors. O₂, LEL and up to two toxic channels using Biosystems' Duo-Tox two channel CO/H₂S sensor.
- User replaceable sensors.
- One button auto calibration.
- Calibration due reminder.
- Sensor span reserve indicators during calibration for predictive maintenance.

BATTERIES

- Interchangeable alkaline or rechargeable (Li-Ion) versions.
- Up to 24 hours run time depending on battery type.
- Drop-in charger.
- Recharges in less than 5 hours.



Multi Vision 密闭空间多气体检测仪

Multi Vision是一款复合型气体检测仪，只用一个按键就可提供可靠的安全保障。Multi Vision用四个独立的探头分别检测氧气、可燃性气体和蒸汽、一氧化碳和硫化氢。Multi Vision 具有超大的液晶显示屏和内置采样泵，然而却很小巧，可以握在手中或别在腰带上。Multi Vision还有其它许多特性，它们对于在密闭空间的安全工作十分关键。总之，Multi Vision简单可靠，易学易用。

MultiVision 机型

订货号	含探头(碱性电池)
54-40-30000A	LEL/O ₂
54-40-30100A	LEL/O ₂ /CO
54-40-30200A	LEL/O ₂ /H ₂ S
54-40-30102A	LEL/O ₂ /CO/H ₂ S
订货号	含探头(NiMH充电电池)
54-40-30000N	LEL/O ₂
54-40-30100N	LEL/O ₂ /CO
54-40-30200N	LEL/O ₂ /H ₂ S
54-40-30102N	LEL/O ₂ /CO/H ₂ S

MultiVision 配件

订货号	描述
54-41-007	手动采样泵

技术参数

尺寸(长x宽x高)	15×8.6×6.4 cm
重量	570 g
耐用	符合IPX5/IPX7防水标准
显示屏	超大液晶显示屏5.1x3.8厘米
声音报警	两种音调，一英尺内可达92分贝
发光报警	红色发光二极管
显示屏背景光	用按键开启
控制	单键自动校验
外壳	镀金属铬，可抵御强度达40V/m射频干扰的ABS外壳
电池选择	碱性或NiMH充电电池组
操作时间 (不定点采样模式)	20小时NiMH(充电)，16小时，碱性
操作时间 (定点采样模式)	16小时NiMH(充电)，12小时，碱性

MultiVision 探头

订货号	描述	检测范围	检测精度
54-42-80C	LEL	0-100% LEL	1% LEL
54-42-90	O ₂	0-30%/VOL	0.1%
54-42-01	CO	0-1000 PPM	1PPM
54-42-02	H ₂ S	0-200 PPM	1PPM

主要特点

方便单键操作

Multi Vision左侧的MODE键可以控制所有日常的操作。

- 滚动显示当前气体的读数，峰值和加权平均值。
- 零位标定及量程校验
- 开启背景灯
- 单键自动校验

超大显示屏

5.1×3.8(厘米)方便读数的带背景灯的超大前置显示屏。

可选装的内置采样泵

全自动内置电动采样泵。

- 自动在定点采样和不定点采样模式间切换
- 出厂时已安装好
- 每次使用前自动检查有无漏气

坚固，不受气候影响

防水，抗冲击的镀铬ABS外壳。

防水性能达到IPX5/IPX7

射频干扰防护

能够抵御高达40V/m的射频干扰。

电池寿命长

充电后可连续长时间使用。

- NiMH电池组在不定点采样模式下可用20小时，在定点采样模式下可用16小时。
- 碱性电池在不定点采样模式下可用16小时，在定点采样模式下可用12小时。

黑匣子数据记录器

内置数据记录器可记录工作期间周围大气的状况。

- 存储40小时以上的仪表读数。
- 可随时升级为数据记录型的气检测仪。(如需升级为数据记录型产品，请与巴固公司联系)

Multi Vision™ Multi-Sensor Gas Monitors

The Multi Vision is a multi-gas detector designed to provide reliable safety at the touch of just one button. The Multi Vision uses four independent sensors for detection of oxygen, combustible gases and vapors, carbon monoxide and hydrogen sulfide. The Multi Vision has an extra-large LCD display and built-in sample pump, yet is small enough to carry in your hand or clip to your belt. And Multi Vision is loaded with many other features critical for working safely in confined spaces. Overall, Multi Vision provides a simple reliable system that is easy to learn and use.



MultiVision Configuration

Ref.	Sensor Installed (Alkaline)
54-40-30000A	LEL/O ₂
54-40-30100A	LEL/O ₂ /CO
54-40-30200A	LEL/O ₂ /H ₂ S
54-40-30102A	LEL/O ₂ /CO/H ₂ S
Ref.	Sensor Installed (Rechargeable)
54-40-30000N	LEL/O ₂
54-40-30100N	LEL/O ₂ /CO
54-40-30200N	LEL/O ₂ /H ₂ S
54-40-30102N	LEL/O ₂ /CO/H ₂ S

MultiVision Accessories

Ref.	Description
54-41-007	manual sample draw kit

TECHNICAL SPECIFICATIONS

Dimensions	6"x3.4"x2.5"(15x8.6x6.4cm)
weight	20 oz(570g)
Durability	Meets IPx5/IPx7 water standard
Display	Oversized2"x1.5"(5.1x3.8cm)LCD display
Audible Alarm	Loud warbling,two-tone alarm rated at 92 dBA at one foot
Visual Alarm	Bright red LED alarm
Display Backlight	Activates with button
Controls	One-button autocalibration
Housing	Chrome-metal plated,RFI resistant ABS with immunity to 40V/m
Battery Options	Alkaline or rechargeable NiMH (Nickel Metal Hydride)battery packs
Battery Life (diffusion)	20hrs.NiMH(rechargeable),16hrs.Alkaline
Battery Life with pump	16hrs.NiMH(rechargeable),12hrs.Alkaline

MultiVision Sensors

Ref.	Description	Range	Resolution
54-42-80C	LEL	0-100% LEL	1% LEL
54-42-90	O ₂	0-30%/VOL	0.1%
54-42-01	CO	0-1000 PPM	1PPM
54-42-02	H ₂ S	0-200 PPM	1PPM

KEY FEATURES

Easy one-button operation

The MODE button on the left side of Multi Vision controls all day-to-day functions.

- Scroll through the current gas readings, MAX and TWA screens.
- Initiate fresh air and span calibration sequences.
- Turn on the backlight.
- One button autocalibration.

Extra large display

2 by 1.5 (5.1X3.8cm) easy to read large, front-mounted backlit display.

Optional built-in pump

Fully au-tomated testing with built-in motorized sample draw pump.

- Automatic switching between pump and diffusion modes.
- Factory installed.
- Automatic leak test before every use.

Rugged and weatherproof

Watertight, impact-resistant chrome-plated ABS case.

- Rated to IPX5/IPX7 against water ingress (immersible).

RFI protection

Immune to Radio Frequency Interference to 40V/m.

Long battery life

For extended periods of continual use between charges.

- The NiMH battery pack provides up to 20 hours of use in diffusion mode and up to 16 hours with the pump on.
- The Alkaline battery pack provides up to 16 hours of use in diffusion up to 12 hours of use in diffusion pump on.

Black box data recorder

Built-in data recorder provides a record of atmospheric conditions during operation.

- Stores more than 40 hours of instrument readings.
- Upgrade to a full data logging instrument at any time.

为 ToxiPro 和 ToxiLtd 单通道气体检测仪提供全自动的检测和标定

IQ Express 自动检测标定义

IQ Express是斯博瑞安新的单通道气体检测仪ToxiPro和ToxiLtd的完美补充。可以进行全自动的检测和标定，完成8个重要的测试。包括：气体传感器检测、仪器性能测试和几秒钟便能完成的记录保存程序。

IQ Express大大的提高了记录保存的效率和准确性。您只需把气体检测仪插入接口，IQ Express帮您完成剩下的工作。IQ Express有着极高的性价比，不需要用户具备任何测试和文书记录方面的技能，特别省事。工作人员可以非常轻松的完成仪器的检测和标定。电池测试、声音警报测试、可视警报测试、震动警报测试（如果含有）、可视警报测试、新鲜空气校正、准确性测试和记录保存。

如果准确性测试失败，即使用户不进行任何操作，IQ Express 也会进行全自动校正。

通过USB和以太网把IQ Express连接到您的计算机，以便直接把数据下载到您的计算机。IQ Express提供了一种智能的、简单的方式确保了安全和可靠性，没有任何仪器能让一切变得比斯博瑞安的IQ Express更简单。



Multipro IQ Express

订货号	描述
54-46-9000	IQ Express Docking Station 软件，安装盘和手册

*单独出售需求流量调节器，校正气体，以及ToxiPro/ToxiLtd。

主要特点

全自动测试

- 全自动仪器身份确认
- 全自动电池测试
- 全自动警报测试（有声、可视、振动）
- 全自动稳定性测试
- 全自动校正（如果需要）
- 全自动记录保存
- 全自动预备/故障指示

单个或多个扩展接口

- 同时连接 1-4 个

设置选项

- 独立校正站
- 通过 USB 与计算机连接
- 网络兼容**

计算机控制

- 与电脑连接，在测试过程中加强系统对校正和数据采集的控制。

有效且经济

- 在 20 秒内进行准确性测试
- 在 1 分钟内进行校正



A Fully Automated Bump Test and Calibration Station for ToxiPro™ and ToxiLtd™ Personal Gas Detectors.

Biosystems MultiPro™ IQExpress Docking Station

IQ Express is the perfect complement to Biosystem's new personal gas detectors, ToxiPro and ToxiLtd. This fully automated bump test and calibration station performs up to eight critical tests, including gas sensor identification, instrument performance, and record-keeping procedures in under 20 seconds.

The IQ Express dramatically improves compliance record-keeping efficiency and accuracy. You just put the gas detector in the dock and the IQ Express Station does the rest.

Extremely cost-effective, IQ Express requires no testing or clerical skills and minimal effort by users. Workers can check their instruments quickly and easily.

The IQ Express Station automatically performs eight procedures, including: instrument identification, battery test, audible alarm test, visual alarm test, vibrating alarm test (if applicable), fresh air calibration, bump test, and record-keeping. If the bump test fails, IQ Express will automatically perform a full calibration without intervention from the user. Total processing time, including testing and calibration, is still under one minute.

USB to download instrument data. To make testing even easier, connect up to four IQ Express Stations to a single gas supply. IQ Express. The intelligent, affordable way to assure safety and compliance. From Biosystems. No one makes it easier.



IQ Controller & Dock Pricing

Ref.	Description
54-46-9000	IQ Express Docking Station with Software, Installation Disks and Manuals

*Demand flow regulators, calibration gas and ToxiPro/ToxiLtd sold separately.

KEY FEATURES

automated tests

- Automatic instrument identification
- Automatic battery test
- Automatic alarm tests (audible, visible, vibrating)
- Automatic bump test
- Automatic calibration (if necessary)
- Automatic record keeping
- Automatic ready/fault indication

SINGLE OR MULTIPLE DOCKS

- Cascade between 1 and 4 docks

CONFIGURATION OPTIONS

- Standalone calibration station
- Connected to PC via USB
- Network compatible**

PC CONTROL

- Connect to a PC for enhanced control over calibration and data acquisition during testing

EFFICIENT AND ECONOMICAL

- Bump test in under 20 seconds
- Calibration in under 1 minute

听力防护系列
Hearing Protection

眼部面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

为MultiPro™多通道气体检测仪
提供全自动的检测和标定

MultiPro™ IQ Express 自动检测标测定仪



数秒内确保了
安全和可靠性

MultiPro IQ Express是斯博瑞安新的多功能气体探测仪的完美补充，可以全自动进行检测和标定，完成8种重要测试，包括：气体传感器检测、仪器性能测试和几秒钟便能完成的记录保存程序。

MultiPro IQ Express 极大的提高了记录保存的效率和准确性。您只需把气体检测仪插入接口，MultiPro IQ Express帮您完成剩下的工作。MultiPro IQ Express有着极高的性价比，不需要用户具备任何测试和文书记录方面的技能，特别省事。工作人员可以非常轻松的完成仪器的检测和标定。电池测试、声音警报测试、可视警报测试、震动警报测试（如果含有）、可视警报测试、新鲜空气校正、准确性测试和记录保存。

如果准确性测试失败，即使用户不进行任何操作，IQ Express 也会进行全自动校正。全部过程，包括检测和校正只需大约一分钟的时间。

通过USB和以太网把MultiPro IQ Express连接到您的计算机，以便直接把数据下载到您的计算机。MultiPro IQ Express提供了一种智能的、简单的方式确保了安全和可靠性，没有任何仪器能让一切变得比斯博瑞安的MultiPro IQ Express更简单。

MultiPro IQ Express

订货号	描述
54-49-9000	MultiPro IQ Express Docking Station 软件、安装盘和手册

主要特点

全自动测试

- 全自动仪器身份确认
- 全自动电池测试
- 全自动警报测试（有声、可视、振动）
- 全自动稳定性测试
- 全自动校正（如果需要）
- 全自动记录保存

全自动预备/故障指示

设置选项

- 独立校正站
- 通过USB与计算机连接
- 网络兼容**

听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



A Fully Automated Bump Test and Calibration Station for the MultiPro™ Confined Space Gas Detector.

Biosystems MultiPro™ IQExpress Docking Station

MultiPro IQ Express is the perfect complement to Biosystem's new confined space multi-gas detector the MultiPro. This fully automated bump test and calibration station performs up to eight critical tests, including gas sensor identification, instrument performance, and record-keeping procedures in seconds.

The MultiPro IQ Express dramatically improves compliance record-keeping efficiency and accuracy. You just put the gas detector in the dock and the MultiPro IQ Express Station does the rest. Extremely cost-effective, MultiPro IQ Express requires no testing or clerical skills and minimal effort by users. Workers can check their instruments and get to their jobs with minimal interruptions. The MultiPro IQ Express Station automatically performs eight procedures, including: instrument identification, battery test, audible alarm test, visual alarm test, vibrating alarm test (if applicable), fresh air calibration, bump test, and record-keeping. If the bump test fails, IQ Express will automatically perform a full calibration without intervention from the user. Total processing time, including testing and calibration just takes a little over a minute.

Connect MultiPro IQ Express to your PC via USB or Ethernet* to download data directly to a PC. MultiPro IQ Express. The intelligent, affordable way to assure safety and compliance. From Biosystems. No one makes it easier.

assure safety and compliance in seconds



IQ Controller & Dock Pricing

Ref.	Description
54-49-9000	MultiPro IQ Express Docking Station with Software, Installation Disks and Manual

KEY FEATURES

automated tests

- Automatic instrument identification
- Automatic battery test
- Automatic alarm tests (audible, visible, vibrating)
- Automatic bump test
- Automatic calibration (if necessary)
- Automatic record keeping
- Automatic ready/fault indication

CONFIGURATION OPTIONS

- Standalone calibration station
- For advanced features connection to PC via USB or Ethernet*
- Network compatible

V
V
V

听力防护系列
Hearing Protection

眼部面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

SCBA 自动综合检测仪

标准

- 美国市场上唯一符合NFPA1852标准的SCBA测试仪器
- 同时满足NIOSH非NFPA呼吸器及GA123-2004的要求
- 满足OSHA相关测试及记录的要求
- 几乎为所有美国市场的SCBA生产商提供产品

可提供的测试

- 完整的SCBA测试空气管路系统测试
- SCBA快速测试
- 面罩产品测试
- 正负压呼吸设备测试

SCBA 测试的主要项目

- 完整的目测
- 面罩泄露率测试
- 高压泄露测试
- 静态面罩压力测试
- 首次呼吸压力测试
- 呼吸阀开启压力测试
- 动态压力测试
- 压力表测试
- 报警精度测试
- 旁通气流测试

强大的数据库功能

- 满足NFPA所有的记录性要求
- 全参数设定
- 测试值全线维护
- 可以以多种方式检索测试数据和设备信息，包括机主和所在地的相关信息
- 维护SCBA的历史数据



订货号 Ref.: BC54-20-0320C

SCBA Performance Tester

Standards

- The only NFPA 1852 compliant SCBA test bench
- Meets NIOSH test criteria for testing and record keeping
- Exclusive test bench for virtually all SCBA manufacturers
- Custom software available from 3M, Drager, MSA, Interspiro, ISI, Scott, Survivair

Available Tests

- Complete SCBA test
- SCBA Quick test
- Airline Apparatus test
- Facepiece test
- Positive and negative breathing machine tests

Complete SCBA Test Protocol

- Complete visual inspection with comprehensive database for common topics
- Facepiece leak test
- High pressure leak test
- Static facepiece pressure test
- First breath activation pressure
- Dynamic breathing test Standard (NIOSH breathing rate - 40 lpm.) Max (NFPA breathing rate - 102 lpm.)
- Gauge accuracy test
- Alarm accuracy test
- Bypass flow test
- Bypass flow test

Database Functions

- Meets all NFPA requirements for recordkeeping
- Complete apparatus setup
- Maintain records of all test is due
- Sort and search for information in various ID fields of the test or equipment info including owner and location
- Maintains the history of the SCBA



Ref.: BC54-20-0320C



> > > 订购热线：400-600-7758 网站：www.myehs.cn

防机械类伤害	Mechanical Hazards Resistance	73
防割伤伤害	Cut Resistance	75
电绝缘手套	Electrosoft	77
防化学类伤害	Chemical Resistance	78
耐高温及焊接类应用	Heat Resistance and Welding Application	79
防冻伤害	Cold Resistance	82

确定您的尺码

将手置于图中标示的位置。
读出右侧的尺码标号。

Check your size

Place your hand on the diagram here to measure your hand size.

防护手套尺码对应表

Table of equivalence for gloves sizes

Perfect Fit					
6	7	8	9	10	11
Chainex					
XXS	XS	S	M	L	XL
0	1	2	3	4	5



裁剪/缝制手套

Sperian 的制造部门设计和生产一系列的裁剪/缝制手套，主要为由高质量皮革制成的手套。

针织手套

在欧洲和美国，Sperian 是无可争议的针织手套业的领导者。其工厂拥有一千多台编织机，它的生产能力与革新能力使 Sperian 成为追求高科技产品的公司的首选合作者。

浸胶手套

Sperian 出色地掌握整套浸涂技术：天然乳胶，合成橡胶（丁腈，氯丁橡胶），PVC，生产内胎式和无内胎式手套。

Electrosoft 系列手套体现了 Sperian 在天然乳胶领域的高超技术。Electrosoft 系列手套用于带电工作环境中的电绝缘防护，保护范围从 500 伏特到 36000 伏特工作电压。

危险和标准

EN388 机械性危险防护

- A 抗磨损
- B 防切割
- C 抗撕裂
- D 防穿刺



EN374/1-3 化学品防护

EN374-3表示该手套能在3种以上化学品中的耐渗透时间大于30分钟。



EN 511 低温危险防护

- A 传导寒冷
- B 接触寒冷
- C 透水性-等级1至少防水30分钟



EN407 高温/火焰防护

- A 燃烧/烧灼
- B 防接触热
- C 防对流热
- D 防辐射热
- E 防液态金属小颗粒，较少飞溅
- F 防液态金属小颗粒，较多喷射



EN60903 / CEI903 电绝缘防护

EN1082 冲击割伤防护

经过质量为1050克的金属刀片从250毫米高处落下的冲击切割试验

Table of Chemical Agents and Their Related Protective Gloves

EN 374/1-3		Natural latex	Chloroprene	Nitrile	Vinyle PVC	Natural latex	Chloroprene	Nitrile	Vinyle PVC	Natural latex	Chloroprene	Nitrile	Vinyle PVC
Acetaldehyde	F					Ethylaniline	E			Polyester resins	F		
Acetic anhydride at 50 %	A					Ethylene glycol	F			Potash flakes	B		
Acetone	C					Fertilizers	C			Potash in concentrated washing detergent	B		
Acetone chloride	C					Fixing salts	E			Potassium acetate	B		
Ammonium acetate	B					Fluorides	B			Potassium bicarbonate	A		
Ammonium carbonate	B					Formaldehyde at 30 %	C			Potassium carbonate	B		
Ammonium chloride	B					Formic acid at 90%	B			Potassium chloride	B		
Ammonium nitrate	B					Formol (or formaldehyde)	-			Potassium cyanide	D		
Amyl acetate	A					Fragrances and essences	B			Potassium nitrate	B		
Amyl acid	C					Fuel oil	F			Potassium permanganate	D		
Aniline	E					Fuels	F			Potassium phosphates	D		
Animal fat	-					Fural (furfural or furaldehyde)	E			Potassium sulphate	B		
Asphalt	E					Gas oil	F			Propylene dichloride	F		
Benzaldehyde	E					Glacial acetic acid	B			Quick lime	B		
Benzene	E					Glycerine	-			Silicates	B		
Benzyl alcohol	E					Glycerophthalic paint	C			Soda flakes	B		
Bleach	B					Glycols	F			Soda in concentrated washing detergent	B		
Borax	A					Herbicides	A			Sodium bicarbonate	A		
Brake oil (lockheed)	F					Hexane	F			Sodium bisulphite	A		
Bromhydric acid	B					Household detergents	A			Sodium carbonate	-		
Bromides	C					Hydraulic fluids (esters)	C			Sodium chloride	B		
Butyl acetate	C					Hydraulic oils (petrol)	F			Sodium hydrochlorate	B		
Butyl alcohol (or n-butanol)	D					Hydrofluoric acid at 30 %	B			Sodium nitrate	B		
Calcium acetate	-					Hypochlorite de sodium	B			Sodium phosphates	B		
Calcium chloride	-					Isobutyl alcohol (or isobutanol)	A			Sodium sulphate	-		
Calcium fluophosphate	B					Isobutylketone	F			Soya oil	B		
Calcium hydroxide	-					Kerosene	F			Stearic acid	A		
Calcium hypochlorate	B					Lactic acid at 85%	A			Styrene	A		
Calcium nitrate	B					Lard oil	-			Sulfites, bisulfites, hyposulfites	B		
Calcium phosphates	C					Lubricating oils	F			Sulphuric ether (pharmacy)	A		
Car petrol	E					Magnesium oxide	F			Tartric acid	A		
Carbolic acid	D					Metho isobutyl ketone	-			THF - tetrahydrofurane	B		
Carbon tetrachloride	B					Methyl alcohol (or methanol)	C			Tin chloride	E		
Castor oil	-					Methylacetate	E			Toluol	A		
Chloric acid	B					Methylamine	E			Tributyl phosphate	D		
Chlorine	B					Methylaniline	E			Trichlorethylene	F		
Chloroform	F					Methylcyclopentane	F			Trinitrobenzene	E		
Chloridric acid at 30 % and 5 %	B					Methylene chloride	C			Trinitrotoluol	E		
Citric acid	A					Methylethyl ketone	F			Triphenyl phosphate	E		
Concentrated ammonia	B					Methylformate	F			Turpentine	E		
Concentrated boric acid	B					Milk and dairy products	-			Vinegar and condiments	B		
Concentrated sulphuric acid	B					Mineral fat	F			Washing powders	B		
Creosote	D					Monochlorobenzene	F			Water-based paint	A		
Cresol	D					Nbutylamine	F			White spirit	F		
Cutting oil	F					Naphtalene	F			Xylene	F		
Cyclohexane	C					Naphtha	F			Xylophene	F		
Cyclohexanol	A					Nickel chloride	A			Zinc sulphate	D		
Cyclohexanon	C					Nitric acid at 20%	B						
Dead lime	A					Nitrobenzene	B						
Diacetone alcohol	C					Nitrohydrochloric acid	F						
Dibutyl phthalate	E					Nitropropane	B						
Dibutylether	E					Oleic acid	A						
Dichloromethane	F					Oxalic acid	A						
Diethanolamine	E					Paraffin oil	-						
Dilute sulphuric acid	B					Perchlorethylebene	F						
Diocyl phthalate	E					Peroxide	D						
Ethyl acetate	C					Petroleum ether	E						
Ethyl alcohol (or ethanol)	D					Petroleum products	F						
Ethylamine	A					Phosphoric acid	B						

Risk indicator

- Non toxic however contact may be harmful
- A** Can cause burns
- B** Risk of burns
- C** Toxic
- D** Highly toxic
- E** Highly toxic with secondary effects
- F** Highly toxic with irreversible and fatal risks

In all cases, it is essential to wear the suitable gloves.

- Very good
- Good
- Average
- Not recommended

This table only gives an indication. «PERMEATION» is the time it takes for a chemical to go through the glove. It has no relation to glove degradation. It is therefore highly recommended to take the risk indicator into account and to make sure that the glove has been tested for the chemical to be used.

听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



订货号 Ref.: 21 002 50CN (灰色)

尼龙耐磨工作手套 掌浸 PU PU First

产品适用于汽车零部件, 精密机械零件, 电子安装, 喷漆室检验区域, 化妆品包装, 照片冲印, 光学产品, 微电子和微型机械零部件等需要精细动作并保护产品的场合。

- 13 针优质尼龙针织,
- 在手掌和指尖处有 PU 涂层,
- 不含硅,
- 良好的灵活性和耐磨性, 为精细工作提供良好的触感,
- 长度: 25 厘米

For fine and flexible handling and product protection circumstance.

- Lightweight white polyamide knitted gloves, gauge 13
- Polyurethane coating at the palm and fingertips
- Exceptional dexterity, excellent abrasion resistance
- Length: 25 cm



订货号 Ref.: 21 322 55CN (白色)

尼龙分类工作手套 指浸 PU 白色 Perfect Poly® Finger

产品适用于精密机械零件, 电子安装, 照片冲印, 光学产品, 微电子和微型机械零部件等需要精细动作并保护产品的场合

- 13 针优质尼龙针织,
- 在指尖有 PU 涂层, 保护产品
- 不含硅,
- 良好的灵活性,
- 长度: 25 厘米

For fine and flexible handling and product protection circumstance.

- Lightweight white polyamide knitted gloves, gauge 13
- Polyurethane coating at the palm and fingertips
- Exceptional dexterity, excellent abrasion resistance
- Length: 25 cm
- Color white



订货号 Ref.: 22 322 40CN

订货号 Ref.

产品 Product

尺码 Sizes

EN 388
CE EN 420
a b c d

21 002 50CN

PU First Grey

6, 7, 8, 9 和 10

4 1 3 1

21 322 55CN

PU First White

6, 7, 8, 9 和 10

4 1 3 1

22 322 40CN

Perfect Poly® Finger

6, 7, 8, 9 和 10

轻微机械伤害



订货号 Ref.: 22 322 70CN

尼龙耐油防滑工作手套 掌浸发泡丁腈 黑色 POLYTRIL™ AIR

用于在多油和潮湿的环境中操作小物件，有良好的耐油性能，抓握性表现优良。

- 黑色尼龙编织手套
- 在手掌和手指处加有黑色发泡丁腈涂层
- 弹性编织手腕
- 13针
- 长度: 25厘米
- 颜色: 黑色

Fine handling in damp, greasy or dirty environment.

- Black polyamide seamless knitted glove
- Black breathable nitrile foam coating on palm and on fingertips
- Length: 25 cm
- Coating color: Black



订货号 Ref.: 22 322 30CN

尼龙耐油工作手套 掌浸丁腈 灰色 POLYTRIL™

良好的操作性能，用于在多油的环境中操作物件。

- 白色尼龙编织手套
- 在手掌和手指处加有灰色丁腈涂层
- 弹性编织手腕
- 13针
- 长度: 25厘米
- 颜色: 灰色

Fine handlings in damp oily or greasy environment.

- White polyamide seamless knitted glove
- Grey oilproof nitrile coating on palm and on fingertips
- Length: 25 cm
- Coating color: grey



订货号 Ref.

产品 Product

尺码 Sizes

a b c d

22 322 70CN

POLYTRIL™ AIR

8 和 9

4 1 2 1

22 322 30CN

POLYTRIL™

8 和 9

4 1 2 1

Dyneema® 防割工作手套 Perfect Cutting® Dyneema® White

产品具有良好的防割性能以及优良的舒适性, 适合在干燥和略微潮湿的工作环境中使用, 用于操作容易使人割伤的物件。

For the handling of cutting objects in a dry or slightly damp atmosphere.

- 白色 Dyneema®和 Lycra®编织手套
- 在手掌和手指尖敷有聚氨酯涂层
- 灵活性好
- 13针
- 经特殊处理不起毛
- 长度: 24 厘米
- 颜色: 白色
- White Dyneema®/Lycra® knitted glove
- With polyurethane coating at the palm and Fingertips
- Excellent dexterity
- Gauge 13
- No linting
- Length: 24 cm
- Color: white



订货号 Ref.: 22 322 44CN

贴皮KEVLAR® 耐磨防割手套 JUNKYARD DOG

产品适用于各种需要防割、耐磨、防穿刺的工作环境中。可以在各种干燥和潮湿的环境中工作。

- 100% KEVLAR® 纤维编织手套
- 在手指和手掌部分缝有牛皮以增加耐磨性能
- 7针
- 长度: 25厘米
- 颜色: 黄色

For the heavy handling of cutting or perforating parts in a dry or damp environment.

- 100% KEVLAR® fibre knitted glove
- Cowhide split leather reinforcement at the palm and fingers
- Gauge 7
- Length: 25 cm
- Color: yellow



订货号 Ref.: 20 321 01

订货号 Ref.

产品 Product

尺码 Sizes



a b c d

22 322 44CN

Perfect Cutting® Dyneema® White

8 和 9

4 3 4 2

20 321 01

JUNKYARD DOG

8 和 9

4 4 4 3



订货号 Ref.: 22 330 25

尼龙点塑防割手套 ABRATEX GRIP

产品设计用来操作易滑和有割伤危险的物件。

- 经济型防割手套
- 高密度尼龙编织手套
- 在手掌处有蓝色PVC塑点
- 10 针
- 长度: 25 厘米
- 颜色: 白色

Handling of slippery and cutting parts.

- Economical cut resistant glove
- High tenacity nylon plated with cotton
- PVC dots on palm
- Gauge: 10
- Length: 25 cm
- Color: white



订货号 Ref.: 44 028 35

KEVLAR 防割护臂 ARACUT SLEEVES

产品设计用来保护工作人员的手掌和前臂免收割伤的危害。

- 双层KEVLAR编织护臂
- 大拇指处留有指孔
- 长度: 45厘米
- 颜色: 黄色

Protection of forearm and palm against cut.

- 2 ply KEVLAR knitted sleeve
- Thumbhole
- Length: 45 cm
- Color: yellow



订货号 Ref.: 250000XR0302

金属防割手套 METAL MESH

产品适合于肉类切割、剔骨等食品加工作业。

- 产品为金属防割手套, 不分左右手, 内外可翻转使用
- 手腕处为编织条, 配有可调节快速搭扣

Reversible models are equipped with press-stud fastenings on each side of textile strap, making it easy to switch from one hand to the other, by simply turning the glove as well as the buckle inside out.

订货号 Ref.

产品 Product

尺码 Sizes



a b c d

a b c d e f

22 330 25

ABRATEX GRIP

8 和 9

2 2 4 x

44 028 35

ARACUT SLEEVES

均码 One size

1 3 4 x

x 1 x x x x

250000XR0302

Metal Mesh Glove

5,5 (XXS) 至 10,5 (XL)

听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



电工绝缘手套 ELECTROSOFT

- 提供适合于500伏至36000伏的工作电压范围。
- 产品由高性能天然乳胶制成, 经严格测试达到最高安全品质。
- 颜色: 米色
- Electrosoft gloves cover a wide range of conditions of use (from 500 up to 36000 volts) and meet all protection standards, from 00 to 4.
- All these products show high dielectric characteristics made of natural cut-off edge latex.
- Color: beige

订货号 Ref.	工作电压	测试电压		尺码 Sizes	EN 60903
20 919 03	电工绝缘手套 (500V)	2500V	ELECTROSOFT 00G	9 和 10	Class 00
20 919 07	电工绝缘手套 (1000V)	5000V	ELECTROSOFT 0G	9 和 10	Class 0
20 919 12	电工绝缘手套 (7500V)	10000V	ELECTROSOFT 1G	9 和 10	Class 1
20 919 21	电工绝缘手套 (17000V)	20000V	ELECTROSOFT 2G	9 和 10	Class 2
20 919 41	电工绝缘手套 (36000V)	40000V	ELECTROSOFT 4G	10 和 11	Class 4



绝缘手套外用防护手套 OVERGLOVE

外用防护手套由优质牛皮缝制而成, 能在耐磨、防割、耐撕裂和防穿刺方面提供良好的抗机械伤害防护。在寒冷环境下还能起到优良的保暖作用。

- 厚度: 1.1毫米
- 颜色: 米色
- Overgloves are used to provide mechanical protection from abrasion, cut, tear and perforation.
- thickness: 1.1mm
- color: beige

订货号 Ref.	产品 Product	尺码 Sizes	EN 388 CE EN 420			
			a	b	c	d
20 128 98	绝缘手套外用防护手套 (中压) OVERGLOVE MT 1G	9 和 10	2	1	2	1
20 128 99	绝缘手套外用防护手套 (高压) OVERGLOVE HT 2G & 3G	9 和 10	2	1	2	1



订货号 Ref.: 20 948 31

丁腈防化手套 PowerCoat® 948-31 NITRAF

对很多产品(油、洗涤剂、溶剂)尤其是碳氢化合物具有良好的机械和防化防护功能。

- 产品为喷絮内里
- 表面有小圆型纹路
- 厚度: 0.51 毫米
- 长度: 33 厘米
- 颜色: 绿色

Good resistance to cutting fluids and hydrocarbons.

- Nitrile unsupported glove
- Cotton flock interior
- Pebble finish
- Thickness: 0.51 mm
- Length: 33 cm
- Color: green



订货号 Ref.: 20 950 20

氯丁橡胶轻型防化手套 PowerCoat® 950-20 NEOFIT

产品适用于接触各种酸、碱、有机溶剂、工业粘合剂等化学品,对大多数化学品都具有良好的机械和防化学防护性能。

- 氯丁橡胶防护手套,喷絮内里易于穿戴
- 表面有钻石形纹路
- 厚度: 0.72 毫米
- 长度: 33 厘米
- 颜色: 黑色

Battery handling, can be used with certain diluted acids.

- Neoprene glove
- Cotton flock interior
- Diamond pattern
- Thickness: 0.72 mm
- Length: 33 cm
- Color: black



订货号 Ref.: 20 950 25

氯丁橡胶防化长手套 PowerCoat® 950-25 NEOFIT

产品设计用来操作各种化学物质,如腐蚀性的酸、酒精和油脂等。

- 氯丁橡胶防护手套,喷絮内里易于穿戴
- 表面有钻石形纹路,抓物性能更出色
- 厚度: 0.72 毫米
- 长度: 41 厘米
- 颜色: 黑色

Handling chemicals (caustic acids, alcohols and solvents) Agriculture, Cleaning and Maintenance.

- Neoprene glove
- Cotton flock interior
- Diamond pattern
- Thickness: 0.72 mm
- Length: 41 cm
- Color: black



订货号 Ref.	产品 Product	尺码 Sizes	a	b	c	d	
20 948 31	POWERCOAT® 948-31 NITRAF	8, 9 和 10	3	1	0	1	JKL 正庚烷, 40%浓度苛性钠, 96%浓度硫酸, 抗渗透测试
20 950 20	POWERCOAT® 950-20 NEOFIT	8, 9 和 10	3	1	1	1	AKL 甲醇, 40%浓度苛性钠, 96%浓度硫酸, 抗渗透测试
20 950 25	POWERCOAT® 950-25 NEOFIT	8, 9 和 10	3	1	1	1	AKL 甲醇, 40%浓度苛性钠, 96%浓度硫酸, 抗渗透测试



订货号 Ref.: 20 000 44

焊接手套 BLUE WELDING

产品适合焊接操作时使用。

- 由隔热粗革牛皮缝合而成
- 手心和手背处为软质皮革加固，手腕处为帆布质地
- 厚度: 1.2毫米
- 长度: 35厘米
- 颜色: 蓝色

Designed for welding workers.

- Split leather
- Fully lined: palm and back with fleece, cuff with canvas
- Leather thickness: 1.2mm
- Length: 35 cm
- Color: blue



订货号 Ref.: 20 128 47

皮革焊接隔热手套 FOUNDRY LINED

产品适合焊接操作时使用。

- 由防水隔热粗革牛皮缝合而成
- 在该手套的夹层中衬有4毫米厚的防火泡沫层，提供了更好的隔热防火的效果
- 18厘米牛皮护腕，内层为棉质衬里
- 手套由KEVLAR®线缝合连接
- 皮革厚度: 1.3/1.5 毫米
- 颜色: 红色
- 长度: 39厘米

For Welding usage.

- Water repellent and heat resistant cowhide split leather glove
- Gunn cut, sewn and thumb, gauntlet type
- Hand lined with 4 mm flame resistant foam laminated on flame and heat resistant jersey
- 180 mm grain leather cuff lined with cotton canvas
- Stitch with KEVLAR® thread
- Thickness leather only 1.3/1.5 mm
- Color: red
- Length: 39cm

订货号 Ref.

产品 Product

尺码 Sizes



20 000 44

BLUE WELDING

9 和 10

EN 388				CE EN 420				EN 407				
a	b	c	d	a	b	c	d	e	f			
3	1	3	2	4	1	3	x	4	x			
3	2	4	3	4	1	4	x	4	x			

20 128 47

FOUNDRY LINED

8, 9 和 10



订货号 Ref.: 22 751 12

ZETEX 高性能隔热手套 SUPERZETEX

产品设计用于金属冶炼、玻璃制造等面对超高温危害的工作环境。

- 并指设计，由ZETEX和NOMEX材料共同制成，有极佳的防高温的性能
- 最高防护温度可以达到1100摄氏度
- 在大拇指处缝有KEVLAR®束条，加强防护性能
- 灵活性和操作性能良好
- 颜色：土黄色

Smelting works, glass works.

- ZETEX mitt lined in NOMEX with PBI reinforcement on the all hand and thumb
- KEVLAR® yoke on each side of thumb
- Resistant to temperature up to 1100°C
- Ambidextrous
- Color: khaki



订货号 Ref.: 22 011 35

KERMEL 高性能隔热手套 Demouleur

产品适用于铸造、玻璃行业等。

- 1300克每平方米KERMEL毛巾布并指设计
- 最高防护温度可以达到800摄氏度
- 15厘米隔热防护护腕
- KEVLAR线缝合
- 良好的灵活性
- 长度：36 厘米
- 颜色：绿色

Founding, glass industry.

- Terry Mitt in Kermel 1300g/ m²
- Resistant to temperature up to 800°C
- Heat resistant split leather cuff: 15 cm
- KEVLAR yarn stitching
- Ambidextrous
- Length: 36 cm
- Color: green

订货号 Ref.

产品 Product

尺码 Sizes



a b c d a b c d e f

22 751 12	SUPERZETEX	均码 One size	4	5	4	3	4	4	4	4	4	4
22 011 35	Demouleur	均码 One size	2	4	4	2	4	4	4	2	x	x



订货号 Ref.: 22 806 73

SUPERTHERMA 耐高温手套 SUPER-THERMA

用于操作500摄氏度以下的物体。

For handling objects within 500 degree centigrade.

- KEVLAR® 绒布缝制手套
- 最高防护温度可以达到500摄氏度接触热
- 带有13厘米KEVLAR®护腕
- 长度: 32厘米
- 颜色: 黄色
- KEVLAR® fabric stitching
- Resistant to temperature up to 500°C
- With 13 cm KEVLAR® cuff
- Length: 32 cm
- Color: yellow



订货号 Ref.: 22 815 61

消防员手套 FIREMAN

消防员手套, 具有防火耐高温、防割及防水功能。

For fire-fighting and protect the risks of fire, heat, cut and water.

- 符合 EN 659 标准
- 防水牛皮表面
- 嵌入式大拇指设计
- KEVLAR® 针织衬里
- 粗革护腕保护动脉
- KEVALR® 线缝合
- 粘贴束带
- 长度: 35 厘米
- 颜色: 米色
- In compliance with EN 659 and to the French legislation NIT
- Water-repellent grain leather
- Added thumb
- Plated cotton KEVLAR® knitted lining
- Vein protection
- KEVLAR® thread assembly
- Fastening with self-adhesive band
- Length: 35 cm
- Color: beige



订货号 Ref.: 20 326 88

THERMAKEV 耐高温手套 THERMAKEV

用于操作250摄氏度以下的物体。

For handling objects within 250 degree centigrade.

- 特殊拇指设计, 操作更灵活
- 手掌为KEVLAR®环形织法, 隔热性能更好
- 最高防护温度可以达到250摄氏度接触热
- 带有12厘米帆布护腕
- 长度: 35 厘米
- 颜色: 黄色
- Gun cut, wing thumb
- Palm in Kevlar® terry loop out fabric
- Resistant to temperature up to 250°C
- With 12 cm canvas cuff
- Length: 35 cm
- Color: yellow

订货号 Ref.

产品 Product

尺码 Sizes



a b c d a b c d e f

22 806 73

SUPER-THERMA

均码 One size

2 4 3 4 4 4 4 1 3 x

22 815 61

FIREMAN

9 和 10

3 2 2 2 4 1 3 1 x x

20 326 88

THERMAKEV

均码 One size

1 3 2 1 4 2 4 1 2 x



订货号 Ref.: 20 326 25

TERRY 隔热防护手套 TERRY

产品设计用于在较为干燥的环境中操作尖锐或高温的物体。

- 灰白色Terry材质编织手套
- 毛巾面朝外
- 防护温度可以达到200摄氏度接触热
- 6厘米的弹性编织手腕
- 长度: 25 厘米
- 颜色: 灰色

Handling of sharp and hot parts in dry environment.

- Grey Cotton / Polyester Terry knitted glove
- Loop out
- Resistant to temperature up to 200°C
- Knitted elasticated wrist: 60 mm
- Length: 25 cm
- Color: grey



订货号 Ref.: 22 705 33

Glass Maker 防割手套 VERRIER

用于操作100摄氏度以下的物体。

- 产品有耐高温功能
- 在食指、拇指和手掌部分为纯棉绒布
- 带有12 厘米帆布护腕
- 长度: 30 厘米
- 颜色: 黄色

For handling the glass within 100 degree centigrade.

- Heat resistant gloves
- Cotton jersey with reinforcement on the back
- With 12 cm canvas cuff
- Length: 30 cm
- Color: yellow



订货号 Ref.	产品 Product	尺码 Sizes	EN 388				EN 407					
			a	b	c	d	a	b	c	d	e	f
20 326 25	TERRY	均码 One size	2	3	4	1	0	1	4	1	1	x
22 705 33	VERRIER	9	1	1	1	1	x	1	x	x	x	x

防冻伤害 Cold Resistance



订货号 Ref.: 20 586 85

高性能防冻手套 CRYOGENIC

产品适合低温防护使用。尤其适用于操作、搬运与液氮相关的工作，对于少量液氮泼溅有很好的防护作用。

- 手部为米色防水牛皮，外层涂有硅树脂
- 手腕为粗革牛皮，配有2.3 厘米 VELCRO 尼龙搭扣
- 特别的双层低温隔热设计，能够抵御零下170摄氏度的低温
- 厚度: 0.8 到1.1 厘米
- 长度: 40 厘米
- 颜色: 土黄色

For the handling of liquid nitrogen, offering protection against small splattering.

- Cuff in split leather, with tightening Velcro strip
- Cryogenic special double insulation
- Tested at - 170 °C
- Thickness: 0.8/1.1 mm
- Length: 40 cm
- Color: Beige



订货号 Ref.	产品 Product	尺码 Sizes	EN 388				EN 511		
			a	b	c	d	a	b	c
20 586 85	CRYOGENIC	9 和 10	3	2	2	2	2	x	




➤ 订购热线：400-600-7758 网站：www.myehs.cn

避火隔热服	Fire Protective Clothing	85
隔热服	Heat Resistant Clothing	87
核污染防护服	Nuclear Protective Clothing	89
重型防化服	Heavy Chemical Protective Clothing	90
轻型防化服	Light Chemical Protective Clothing	91

防护服的尺码选择

Choosing the Right Size

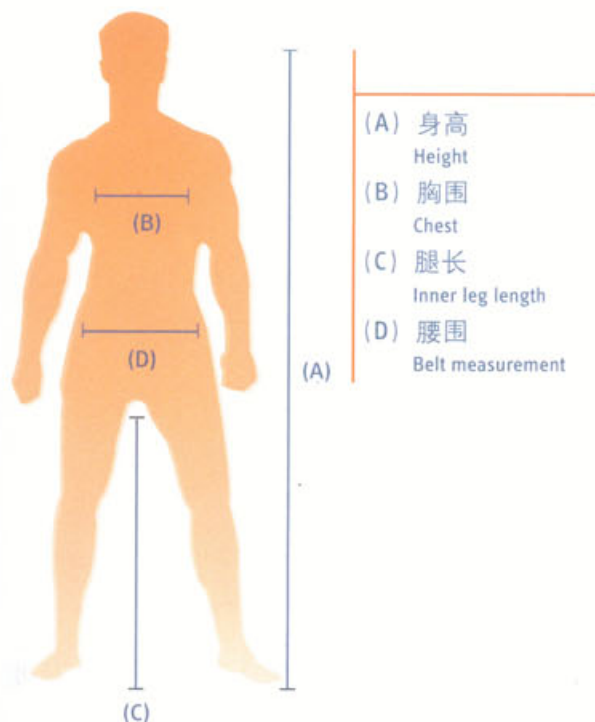

Spacel Plus 3000 RA/EBJ

尺码 Size	身高 Height(A)	腿长 Inner leg(C)
S	164-176	80
M	170-176	80
L	176-182	85
XL	182-188	90
XXL	188-194	97

镀铝隔热上衣下装

Aluminized heat resistant jacket and pants

尺码 Size	身高 Height(A)	胸围 Chest (B)	腿长 Inner leg(C)
S	140-152	84-92	80
M	152-164	92-100	80
L	164-176	100-108	85
XL	176-188	108-116	90
XXL	188-200	116-124	97

了解使用者的需求, 结合先进的技术, 我们为客户提供一系列的防护服。

防护服装

为多种工作环境中的工人提供具有防护作用的工作服装, 为了满足不同用途的需要, 我们根据产品的性质和保护水平为客户提供以下五个系列的产品。

防护服相关标准

- EN 1486 消防员避火隔热保护
- GA 10: 消防员灭火防护服标准
- EN 1149-1: 防静电保护
- EN 13034: 防化学飞溅物
- EN 374: 化学危害

- EN 374-2: 细菌污染
- EN 368: 防化保护
- EN 531: 隔热火焰保护
- EN 943-1: 防护服, 防液体与气体化学物质包括液体烟雾和固体颗粒等-第1部分: 通风与非通风的不透气的化学防护服的性能要求



订货号 Ref: 4102334-42

B1 PU 避火隔热服 B1 PU Fire Protective Clothing

- 高性能的避火隔热服, 可抵御1000°C的火焰, 并能够有效防护高温水蒸汽的喷溅, 该产品适合近火源使用, 但不适合进入或穿越火源
- Aramidic复合材料, 全身式防护服
- 外覆铝质保护层, 服装前部拉链带有保护翻边和按扣
- 可分离式头罩, 头部为镀金玻璃面窗
- 内置安全头盔, 带呼吸器背囊。可以配合自给正压式呼吸器使用
- 整体产品包括五指手套及防护靴, 整体重量小于10.5公斤
- Five layers one-piece steam-proof fire protective clothing designed for fire approaching in environment up to 1000°C, not suitable to enter or cross a fire
- Full body protective suit made of aluminized fabric based on Aramidic fiber
- Inner safety helmet with a panoramic visor made of gold-coated and replaceable glass included in the hood
- Equipped with an inside back pocket for SCBA, the use of which is highly recommended
- Hood, gloves and shoes included
- Total weight less than: 10.5 kg



订货号 Ref: 4111839-S
4111839-M

B2 避火隔热服 B2 Fire Protective Clothing

- 高性能的避火隔热服, 可进入1000°C的火场使用
- Aramidic复合材料, 连体式防护服
- 共七层, 外覆铝质保护层
- 内置安全头盔, 镀金玻璃面窗
- 后置背囊, 可内置空气呼吸器
- 整体重量小于13.5公斤
- Seven layers one-piece steam-proof fire protective clothing designed for fire approaching in environment up to 1000°C, suitable to enter into fire for emergency
- Full body protective suit made of aluminized fabric based on Aramidic fiber
- Inner safety helmet with a panoramic visor made of gold-coated and replaceable glass included in the hood
- Equipped with an inside back pocket for SCBA, the use of which is highly recommended
- Hood, gloves and shoes included
- Total weight less than: 13.5 kg



AIR PLUME 避火隔热服 AIR PLUME Fire Protective Clothing

- 高性能的避火隔热服, 可进入1000°C的火场使用
- Aramidic复合材料, 分体式防护服
- 共三层, 厚度4毫米, 外覆防火材料和铝质保护层
- 内置安全头盔, 镀金玻璃面窗
- 整体产品包括: 五指手套及防护靴, 重量小于9公斤
- Three layers two-pieces fire protective clothing designed for fire approaching in environment up to 1000°C, suitable to enter into fire for emergency
- Two-pieces full body protective suit made of aluminized fabric based on Aramidic fiber
- Inner safety helmet with a panoramic visor made of gold-coated and replaceable glass included in the hood
- Equipped with an inside back pocket for SCBA, the use of which is highly recommended
- Hood, gloves and shoes included
- Total weight less than: 9 kg

订货号 Ref.: 4111831



镀铝隔热长风衣 Aluminized Heat Resistant Coat



- 产品由镀铝芳香尼龙制成，能够有效防护接触热和对流热，辐射热的防护能够达到1000°C，并能保护人体免受高温液态金属飞溅的威胁
- 产品为长风衣式设计，领口为环型设计，前襟开口配有快速搭扣和翻边，保证穿着的舒适和使用的安全
- 适用于钢铁制造、冶金及锻造行业
- Long coat with fast fibulae which makes it more comfortable and easy to use
- Designed to protect wearers from the accidental contact with flame, convective and radiant heat and splashes of molten metal
- Radiation heat resistant up to 1000 °C
- Suitable for steel, metallurgy and smithing industry

订货号 Ref.: 14 101 13



镀铝隔热上衣下装 Aluminized Heat Resistant Jacket And Pants



- 产品由镀铝芳香尼龙制成，能够有效防护接触热和对流热，辐射热的防护能够达到1000°C，并能保护人体免受高温液态金属飞溅的威胁
- 产品为分体式设计，上衣领口为环型设计，前襟开口配有快速搭扣，下装配有背带，保证穿着的舒适和使用的安全
- 适用于钢铁制造、冶金及锻造行业
- Two-piece (jacket and a pants) clothing with fast fibulae which makes it more comfortable to use
- Designed to protect the wearers from accident contacts with flame, convective and radiant heat and splashes of molten metal
- Radiation heat resistant up to 1000 °C
- Suitable for steel, metallurgy and smithing industry

订货号 1410F34.048 上衣 S 号
Ref. : 1410F34.052 上衣 M 号
1410F34.056 上衣 L 号
1410F34.060 上衣 XL 号

1410F35.048 下装 S 号
1410F35.052 下装 M 号
1410F35.056 下装 L 号
1410F35.060 下装 XL 号



镀铝隔热头罩 Aluminized Heat Resistant Helmet



- 产品由镀铝材料制成，并配有镀金压膜面屏，能够有效防护接触热和对流热，辐射热的防护能够达到1000°C，并能保护使用者头部免受高温液态金属飞溅的威胁
- 该产品主要用来配合镀铝隔热服使用，尤其适用在离热源很近和有高温固体或液体飞溅的危险场所
- 适用于钢铁制造、冶金及锻造行业
- The hood has panoramic visor made of gold-coated and replaceable glass
- Designed to work with Aluminized clothing, which protects wearers from accidental contact with flame, convective and radiant heat and splashes of molten metal
- Radiation heat resistant up to 1000°C
- Suitable for steel, metallurgy and smithing industry

订货号 Ref.: 14 101 55



镀铝隔热鞋罩 Aluminized Heat Resistant Shoes Cover



- 产品由镀铝材料制成，能够有效防护接触热和对流热，辐射热的防护能够达到1000°C
- 该产品主要用来配合镀铝隔热服使用
- 适用于钢铁制造、冶金及锻造行业
- Designed to work with Aluminized clothing, this product protects wearers from accidental contact with flame, convective and radiant heat and splashes of molten metal
- Radiation heat resistant up to 1000°C
- Suitable for steel, metallurgy and smithing industry

订货号 Ref.: 14 100 03



订货号 Ref.: 85 273 39

通风头罩 Ventilated Helmet

- 由防火PVC材料制成，能有效防护放射性粉尘、放射性气溶胶等放射性污染物对呼吸系统的危害。带有披肩，充气式领口，需与7~8巴中压供气系统和DE4组合使用
- Disposable fireproof PVC hood, designed to isolate the wearer's respiratory tract when working in surrounding with presumed or known particle contamination
- To be used in conjunction with middle pressure air-supply system



订货号 44 812 11 - 01 S
Ref. : 44 812 12 - 02 M
44 812 13 - 03 L
44 812 14 - 04 XL

通风气衣 Ventilated Clothing

- 用防火的PVC材料制成，拉链在背部开合。带有流量调节器和2个单向排气阀，能有效防护放射性粉尘、放射性气溶胶等放射性污染物对呼吸系统及人体体表的危害。需与7~8巴中压供气系统和DE4组合使用
- Disposable fireproof PVC suit, designed to isolate the wearer's respiratory tracts and body when working in surrounding with presumed or known particle contamination
- Excellent protection faction (>100,000)
- To be used in conjunction with middle pressure air-supply system

Heavy Chemical Protective Clothing

可防护有毒气体、酸性溶剂、高温液体

Designed to protect poisonous gas, acid solution and high temperature liquid



EasyChem 外置式重型防化服 EasyChem Heavy chemical protective clothing with SCBA outside



- 高性能的气密性防化服, 防护性能达到欧标一级的最高防护标准
- 机械强度高, 配有高密闭性防水拉链以及拉链保护层
- 服装内外层均带有特殊阻燃涂层, 缝合采用高频焊接技术, 服装更加耐用, 舒适, 安全
- 全球独有的单向磁力阀, 气体逆向零泄露的同时, 持续排除多余的热能, 穿着舒适
- 呼吸面罩(斯博瑞安PANO面罩, 符合EN-136 Class 3标准)固定在头罩上, 丁基橡胶手套可以通过特殊的紧固卡环装卸
- Air-tight chemical protective clothing in accordance with Type one in European standard
- Resistant and durable by high frequency welding
- Comfortable respiratory mask (Sperian panoramasque class 3 and compliant with EN-136 standard)
- Zip fastener waterproof protected by a flap from crotch to head
- Two single magnetic patented exhaust valves: one located on the breast and one on the top of the head

订货号 Ref	服装尺寸 CM Size CM			鞋码 boots
	高度 Height	腰围 Waist	胸围 Chest	
1400020-S-40				40
1400020-S-42	165-175	68-72	74-140	42
1400020-S-44				44
1400020-M-40				40
1400020-M-42	175-185	72-76	74-140	42
1400020-M-44				44
1400020-L-40				40
1400020-L-42	185-195	76-80	74-140	42
1400020-L-44				44
1400020-XL-40				40
1400020-XL-42	195+	80+	74-140	42
1400020-XL-44				44



内置式重型防化服 Heavy Chemical Protective Clothing with SCBA Inside



- 高性能的气密性防化服, 防护性能达到美标A级和欧标的一级的最高防护标准
- 机械强度高, 配有高密闭性防水拉链
- 呼吸面罩固定在头罩上, 氯丁橡胶手套和安全靴可以通过特殊的紧固卡环装卸
- 四个保压阀保证服装内部保持4毫巴的低正压
- Air-tight chemical protective clothing in accordance with Class A in US standard and Type One in European standard
- Includes gloves and shoes made of Neoprene
- To be used in conjunction with SCBA

订货号 14 000 19C-M-42 内置式 SCBA Inside

Ref.: 14 000 19C-M-43/44 内置式 SCBA Inside



听力防护系列
Hearing Protection

眼脸部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

新

用途: 汽车油漆, 制药工业, 危险化学品操作, 工业清扫, 食品加工.....

This product is designed for printing, hygiene, chemical protective, cleaning, food and pharmacy industry



DS200 系列一次性防护服



- 一次性使用的防静电防护服
- 符合防护服欧洲标准
- 第五类 (EN 13982-1) - 对有害的干燥微粒起到防护作用
- 第六类 (EN 13034) 对化学液体的轻度飞溅起到防护作用
- 符合欧洲 M1 织物阻燃标准 (EN533 / NFP92507)
- 达到 EN 1149 防静电标准
- 达到 EN1073-2: 2002 防放射性微粒穿透标准的要求
- 60g 白色四层复合聚丙烯面料
- 面料材质柔软, 穿着舒适并具有卓越的透气性能
- 双层拉链和脚踝及手腕处有松紧带的设计, 有效防止液体进入, 具有良好的密封性
- 胳膊与肩膀处无缝连接, 穿着合体, 舒适, 回弹性好
- 尺寸: M-XXXXL
- EN1149, anti-static
- EN 533 and M1 certified/ no ignition
- Protect against radioactive particles EN 1073-2: 2002
- 4 layered, non-woven white polypropylene, 60g/m²
- Extraordinary breathability
- Double protective flap (inner/outer)
- Double zipper
- Size : M-XXXXL

产品名称 Product name	订货号 Ref	产品描述 Description		应用行业 Application
		视窗 window	兜帽 hood	
DS201	AP4571450	无 no	有 yes	所有行业 Mass industries
DS202	941001	有 yes	无 no	核工业 Nuclear
DS203	941002	有 yes	有 yes	

尺寸 (size)	M	L	XL	XXL	XXXL	XXXXL
胸围 (cm) Chest (cm)	84-92	92-100	100-108	108-116	116-124	>124
身高 (cm) Height (cm)	164-170	170-176	176-182	182-188	188-194	>194



MS 3.5.6

- 一次性使用的防静电防护服
- 55g白色多层复合聚丙烯防护服
- 出于舒适性考虑, 裁剪宽大
- 防护服为连体带风帽设计
- 手臂和脚踝处有松紧带
- 拉链有双重翻盖的保护直到下巴
- 尺寸: M-XL
- 3-layered, non-woven white polypropylene, 55g/m²
- EN 1149, Antistatic
- Elastic back, double slider and no seams on shoulders



订货号 Ref.: 45 714 33



SPACEL PLUS 3000 RA/EBJ

- 多层复合聚乙烯防护服
- 厚度100微米
- 外表面黄色 内表面白色
- 防护服为连体带风帽设计
- 手腕和脚踝处装有松紧带
- 拉链设计, 并在门襟处采用粘着性翻盖保护
- 尺码: M-XL
- 3-layered Polyethylene coveralls, with yellow outer layer and white inner layer
- Elastic back and adhesive flap
- Thickness: 100u



订货号 41 801 49-03 M
Ref. : 41 801 49-04 L
41 801 49-05 XL



> > > 订购热线：400-600-7758 网站：www.myehs.cn

工业用安全鞋
安全防护靴

Industry Safety Shoes
Safety Boots

95
97

为了使每个人都能拥有一双合适的安全鞋，斯博瑞安集团在结合高新科技的基础上，不断地推陈出新，设计出更符合人体工程学的新款鞋型，穿着更舒适更便捷，具有更高效的保护性。

根据流行趋势，我们的鞋型设计部门推出了能够满足不同类型的使用者的需要的鞋型。我们的设计集简洁和优雅于一身，每一款鞋型都始终考虑其功用性。

- 以其三大系列的特别设计，斯博瑞安集团提供了市场上最为齐全的安全鞋鞋型。使用高品质的材料和独一无二的特性，使我们得到了使用者对于其舒适程度一致好评。
- 其使用皮革的多样性和丰富性使我们有能力提供想要的各款鞋型。
- 特殊的鞋款造型，符合脚底曲线的鞋底设计以及多种透气设计法是提供舒适性和安全性的关键。
- 鞋内透气膜的使用确保了在任何气候条件下都能提供最大的舒适度。

完美细节保证优异品质 Perfect detail, excellent quality.



足部防护系列

室外鞋

室外鞋系列的适用对象为在恶劣气候和工业危险的场所工作的室外人员。所有鞋款的鞋底都有防滑钉以加强抓地力。

功能鞋

如果使用者的工作环境经常变化，功能鞋系列能极好地满足使用者兼顾舒适-保护-安全的需要。

特殊鞋

某些行业的工作环境特殊或者极端。为了更好地满足这些行业工作者——如电焊工，高炉铸工或森林看守者的需要，斯博瑞安集团推出一系列考虑到这些职业的特殊性的鞋款。

新



订货号 SP0919601 F601 C 防砸

Ref.: Anti-impact

SP0919602 F602 CST 防砸 防穿刺

Anti-impact Anti-perforation

SP0919603 F603 CEH 防砸 电绝缘

Anti-impact Electrical insulation

F600 C/CST/CEH 低帮安全鞋

- 印度进口牛皮鞋面, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- D 型扣, 舒适型封闭鞋舌, 防止飞溅液体渗透
- 海绵 + 网布鞋内衬, 舒适透气
- 鞋后跟柔软海绵加厚设计, 有效防止磨脚
- 符合中国国标
- 尺码: 34-48
- Latest economical offer
- Indian buffalo leather upper
- Anti impact (C), anti-perforation(CST), 6000 Volts electrical insulation (CEH)
- Comply with GB standard
- Size: 34-48



订货号 BC0919701 ECO QC 防静电 防砸

Ref.: Anti-static Anti-impact

BC0919703 ECO QCST 防静电 防砸 防刺穿

Anti-static Anti-impact Anti-perforation

BC0919702 ECO CEH 防砸 电绝缘

Anti-impact 6000 Volt electrical insulation

ECO QC / QCST / CEH 低帮安全鞋

- 全粒面头层进口牛皮鞋面, 皮革厚度1.8毫米至2毫米, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- O 型扣, 非封闭鞋舌, 透气性佳
- 海绵 + 网布鞋内衬, 舒适透气
- 符合中国国标
- 尺码: 33-48
- Indian full grain buffalo leather upper, water and oil repellent
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic(C/CST), anti impact, anti perforation(CST), 6000 Volts electrical insulation(CEH)
- O-ring lacing
- Comply with GB standard
- Size: 33-48



订货号 BC0919801 TOCANO QC 防静电 防砸

Ref.: Anti-static Anti-impact

BC0919803 TOCANO QCST 防静电 防砸

防刺穿

Anti-static Anti-impact Anti-perforation

BC0919802 TOCANO CEH 防砸 电绝缘

Anti-impact 6000 Volt electrical insulation

TOCANO QC / QCST / CEH 低帮安全鞋

- 打孔翻毛皮帮面, 透气性佳
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- D 型扣, 全封闭鞋舌, 防止飞溅液体渗透
- 鞋后跟柔软海绵加厚设计, 有效防止磨脚
- 符合中国国标
- 尺码: 33-48
- Perforated split suede leather upper
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic(C/CST), anti impact, anti perforation(CST), 6000 Volts electrical insulation(CEH)
- D-ring lacing, perforations and ventilation of the upper, with a bellowed tongue
- Comply with GB standard
- Size: 33-48



RACING QC / QCST / CEH 低帮安全鞋

- 全粒面头层进口牛皮鞋面, 皮革厚度1.8毫米至2毫米, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- D 型扣, 舒适型全封闭鞋舌, 防止飞溅液体渗透
- 优质PU革内衬, 经久耐穿
- 符合中国国标
- 尺码: 34-48
- Indian full grain buffalo leather upper, water and oil repellent
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic(C/CST), anti impact, anti perforation(CST), 6000 Volts electrical insulation(CEH)
- D-ring lacing, with a bellowed tongue
- Comply with GB standard
- Size: 34-48

订货号 BC6242121 RACING QC 防静电 防砸
Ref.: Anti-static Anti-impact
BC6242122 Racing QCST 防静电 防砸 防刺穿
Anti-static Anti-impact Anti-perforation
BC6242124 RACING CEH 防砸 电绝缘
Anti-impact 6000 Volt electrical insulation



COLT QC / QCST / CEH 低帮安全鞋

- 全粒面头层进口牛皮鞋面, 皮革厚度1.8毫米至2毫米, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- D 型扣, 舒适型全封闭鞋舌, 防止飞溅液体渗透
- 鞋后跟柔软海绵加厚设计, 有效防止磨脚
- 符合中国国标
- 尺码: 34-48
- Indian full grain buffalo leather upper, water and oil repellent
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic(C/CST), anti impact, anti perforation(CST), 6000 Volts electrical insulation(CEH)
- D-ring lacing, with a padded bellowed tongue, comfortable collar design
- Comply with GB standard
- Size: 34-48

订货号 BC6240225 COLT QC 防静电 防砸
Ref.: Anti-static Anti-impact
BC6240226 COLT QCST 防静电 防砸 防刺穿
Anti-static Anti-impact Anti-perforation
BC6245227 COLT CEH 防砸 电绝缘
Anti-impact 6000 Volt electrical insulation



GLOBE QC / QCST / CEH 中帮安全鞋

- 全粒面头层进口牛皮鞋面, 皮革厚度1.8毫米至2毫米, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 耐磨舒适
- D 型扣, 全封闭鞋舌, 防止飞溅液体渗透
- 柔软海绵夹层的中帮设计, 保护脚踝
- 可选加绒内衬, 有效抵御寒冷
- 符合中国国标
- 尺码: 34-48
- Indian full grain buffalo leather upper, water and oil repellent
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic(C/CST), anti impact, anti perforation(CST), 6000 Volts electrical insulation(CEH)
- D-ring lacing, ankle padding, with a bellowed tongue
- Comply with GB standard
- Size: 34-48

订货号 BC 6240470 GLOBE QC 防静电 防砸
Ref.: Anti-static Anti-impact
BC 6240471 GLOBE QCST 防静电 防砸 防刺穿
Anti-static Anti-impact
Anti-perforation
BC 6240475 GLOBE CEH 防砸 6000伏电绝缘
Anti-impact
6000 Volt electrical insulation



GRANT QCK / QCSTK 低帮安全鞋

订货号 BC0828101 GRANT QCK 防静电 防砸
 Ref.: Anti-static Anti-impact
 BC0828102 GRANT QCSTK 防静电 防砸
 防刺穿 猪皮鞋垫
 Anti-static Anti-impact Anti-perforation
 leather insole

- 全粒面头层进口牛皮鞋面, 皮革厚度 1.8毫米至2毫米, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底, 鞋底特殊防滑设计, 耐磨舒适
- D型扣, 舒适型全封闭鞋舌, 防止飞溅液体渗透
- MESH排汗透气材质内衬, 耐磨透气
- EVA真皮鞋垫, 有效吸汗, 凉爽柔软
- 防踢鞋头, 鞋后跟设计
- 符合中国国标
- 尺码: 34-48
- Anti-kick Design of toecap
- Full grain leather upper, durability
- Mesh lining, Breathability
- EVA+Pigskin innersole, soft & breathability
- Anti-static(Q), anti-impact(C), anti-perforation(ST), 6000 Volts electrical insulation(EH)
- A bellowed tongue

安全防护靴 Safety Boots



RALLYE CST

订货号 BC 62 401 24B
 Ref.: BC 62 401 24 黄色 yellow 可选择带毛内衬
 with warm fur lining optional

- 印度进口头层水牛皮帮面, 防水防油
- 双密度聚氨酯 (PU) 注塑鞋底
- 舒适, 轻便, 耐磨, 耐油, 防滑, 防静电, 防砸, 防刺穿, 绝缘
- 符合中国国标
- 尺寸: 34-48
- Indian full grain buffalo leather upper, water and oil repellent
- Injected double density PU outsole
- Abrasion resistance, oil resistance, anti slip, antistatic, anti impact, anti perforation
- Comply with GB standard
- Size: 34-48

FIREMAN SA 消防靴 Fire fighting boots



订货号 Ref.: SABJAC2

- 防火丁腈橡胶靴, 整体防水
- 专利的ATS鞋底设计: 适于在任何表面行走: U形抗疲劳鞋跟; 拱形防滑凹槽适于爬梯
- 对高温、热流及火焰的优秀防护能力: 鞋底耐250°C高温一小时, 鞋面耐2W/cm²热流三分钟, 防火鞋面
- 对一般化学品具备优秀防护能力: 燃料, 油脂, 溶剂以及弱酸
- 最高耐压500伏
- 防砸, 防刺穿, 防静电, 耐磨鞋底, 鞋面防切割
- 每双重量2.050千克
- 符合EN345-2 FPA-CR标准
- 尺寸: 37-48
- Fireproofed nitrile rubber boot, totally waterproof in intensive use
- ATS sole (patented): Good adherence to all types of surfaces, U-shaped anti-fatigue heel, Arched non-slip grooves for ladder work
- Sole resistance to 250°C for over 1 hour, Excellent resistance to heat, heat flow and flames: sole resistance to heat contact, 250°C for over 1 hour; upper resistance to heat flow, 2W/cm² for 3 minutes; flame resistance upper
- Good resistance to contact with commonly used chemicals: fuels, oils, vegetable and mineral greases, weak and diluted acids, solvents
- Electrical insulation up to 500 Volts
- Steel toecap and midsole, antistatic, sole abrasion resistance, cut-resistant of upper
- 2.050kg per pair
- Comply with standard EN345-2 FPA-CR
- Size: 37-48

HYPALON SA 防化靴 Chemical Resistant Boots



订货号 Ref.: 69 932 18

- 极强的防化学品腐蚀能力，尤其是浓酸强酸，燃油以及溶剂
- 专利的ATS鞋底设计：适于在任何表面行走；U形抗疲劳鞋跟；拱形防滑凹槽适于爬梯
- 耐高温：300°C数小时无损坏；自熄功能（火焰不蔓延）
- 防砸，防刺穿，防静电，耐磨鞋底，鞋面防切割
- 适于和防护服一同在危险环境中穿用
- 每双重量2.050千克
- 符合EN345 S5 HRO-CR标准
- 尺寸：36-45
- Excellent resistance to corrosive chemicals, particularly to concentrated and hot acids, fuels and solvents
- ATS sole (patented): Good adherence to all types of surfaces, U-shaped anti-fatigue heel, Arched non-slip grooves for ladder work
- Highly resistant to heat (300°C for several hours), Self-extinguishing (does not spread flames)
- Steel toecap and midsole, antistatic, sole abrasion resistance, cut-resistant of upper
- For use with protective clothing in hostile environments
- 2.050kg per pair
- Comply with standard EN345 S5 HRO-CR
- Size: 36-45

CHIMIE SA 防化靴 Chemical Resistant Boots



订货号 Ref.: RAC.2.SA

- 优秀的防化性能：燃料、油脂、溶剂以及弱酸
- 专利的ATS鞋底设计：适于在任何表面行走；U形抗疲劳鞋跟；拱形防滑凹槽适于爬梯
- 耐高温：250°C 一小时无损坏；500°C二十秒轻微损坏
- 防砸，防刺穿，防静电，耐磨鞋底，鞋面防切割
- 每双重量1.800千克
- 符合EN345 S5 HRO-CR标准
- 尺寸：36-45
- Excellent resistance to contact with chemicals: fuels, oils, greases, solvents, weak and diluted acids
- ATS sole (patented): Good adherence to all types of surfaces, U-shaped anti-fatigue heel, Arched non-slip grooves for ladder work
- Heat resistance, after 1 hour at 250°C: no deterioration, after 20 seconds at 500°C: slight deterioration
- Steel toecap and midsole, antistatic, sole abrasion resistance, cut-resistant of upper
- 1.800kg per pair
- Comply with standard EN345 S5 HRO-CR
- Size: 36-45



> > > 订购热线：400-600-7758 网站：www.myehs.cn

工业用安全带	Harnesses for Industrial Applications	101
特殊用途安全带	Harnesses for Special Applications	104
系绳（带）	Lanyards	105
坠落制动器	Fall Arrest Blocks	109
绳索和钢缆抓绳器	Rope and Wire Fall Arresters	115
连接件和附件	Connectors	117
焊接类坠落防护产品	Welding Fall Protection Products	119
救援产品	Rescue Equipment	120
高空防坠落系统	Fall Protection System	121

个人坠落防护系统的基本组成

个人坠落防护系统能够将工人与悬挂点连接起来，从而完全避免坠落的发生或阻止自由坠落，使工人免受伤害。

悬挂装置、全身安全带及连接系统

这些产品单独使用时并不能提供坠落防护，然而，若恰当地组合使用这些产品，它们就构成了一套极为有效的个人坠落防护系统。

关于选择全身安全带的建议：

背部挂点（背部D型环）：

- 坠落防护安全带的基本挂点
- 能够连接各种坠落防护系统
- 不适合于悬挂作业

前侧挂点（前侧D型环）：

- 前侧连接装置，同时使用来防止坠落
- 还可在救援时使用

前侧挂环：

- 使用安全钩把两个环连接起来，然后再与坠落制动装置连接
- 适合于各种高处作业和密闭空间作业

侧面D形环：

- 悬挂作业时使用
- 在作业时起定位作用
- 不能用于坠落制动系统

Selecting the right harness:

Rear D-ring:

This is the basic attachment point on a harness for fall arrest. It is suited to standard site work where the worker only needs to be attached for safety and does not need to work in suspension at height.

Front D-ring:

Used together for fall arrest, a front attachment provides better control. Generally more comfortable to hang in, they may also be used in a rescue situation.

Front anchorage loops:

The loops are connected using a karabiner. A fall-arrest intermediate attachment is then connected to this. Used in a variety of climbing (with rope grabs), confined space, rescues and work positioning situations.

Side D-rings on the belt:

These D-rings must not be used for fall arrest applications. Most commonly used for work positioning where the worker is required to be suspended for extended periods of time. The use of a belt enhances the comfort for the worker.

个人坠落防护系统的基本组成

悬挂点及连接件

- 悬挂点（吊带、杆、三脚架等）：必须与个人坠落防护系统牢固地连接起来
- 其承载力需大于10KN，并维持3分钟以上（EN795标准，B级）
- 需位于尽量高处，以避免工人坠落时与地面或低层结构碰撞
- 连接件（挂钩、大口径安全钩等）：将连接系统与悬挂点连接起来
- 其承载力需大于15KN，并维持3分钟以上（EN362标准）

坠落防护全身安全带

- 发生坠落时能拉住作业人员，保证身体在坠落时不受伤害
- 配有背带和腿带的全身安全带是唯一适合于坠落制动的产品
- 应根据工作的种类和环境选择合适的安全带
- 安全带上所有挂点的承载力必须大于15KN，并维持3分钟以上（EN361标准和EN358标准）

连接系统

- 将坠落防护全身安全带与挂点或连接件连接（吊绳、救生索等）
- 必须能够限制坠落并应根据工作环境进行选择
- 应计算可能坠落高度，以确定所需的连接系统

标准

- EN353-1 导向型坠落制动器—刚性吊绳和导轨
- EN353-2 导向型坠落制动器—柔性吊绳
- EN354 系绳（带），最大长度：2米。
- EN355 缓冲减震装置
- EN358 工作定位系统
- EN360 伸缩式坠落制动器
- EN361 全身安全带
- EN362 连接件
- EN795(b) 悬挂装置
- EN363 坠落制动系统

Harnesses for Industrial Applications

DuraFlex® 安全带 DuraFlex® Harnesses

得益于TEFLON纤维防护层, DuraFlex®全身式安全带比传统的安全带使用寿命更长。

- DuraFlex®安全带和 Manyard®系绳使用的所有编织材料都经过了这种高科技的无色防护层专业处理。
- TEFLON防水, 油, 脂, 污垢积聚和混凝土灰尘, 这些物质经常会造成安全带或系带材料的变质或腐蚀。

Increased Durability TEFLON®** contributes to extend the service life of the DuraFlex® harness as compared to conventional harnesses.

- An invisible high-tech protective treatment applied professionally to all DuraFlex® and Manyard® webbing.
- TEFLON® repels water, oil, grease, dirt and concrete dust that may cause the degradation and erosion of the harness and Manyard® webbing.



DuraFlex® 双挂点全身安全带 DuraFlex® 2-point Harness

- 带后部挂点和前部编织带挂环的全身安全带
- Two-point harness, rear and front anchorage webbing loops

订货号 Ref. : 10 028 49



DuraFlex® 三挂点全身安全带 DuraFlex® 3-point Harness

- 配有后部挂点和2个前胸挂点的全身安全带
- Three-point harness, rear and front anchorage D-rings

订货号 Ref. : 10 028 53



DuraFlex® 三挂点全身安全带, 配有定位腰带 DuraFlex® 3-point Harness with Positioning Belt

- 带腰带, 后部挂点和2个前侧挂点的全身安全带
- Three-point harness, with positioning belt, rear and front anchorage D rings

订货号 Ref. : 10 028 57

弹性编织带已在欧洲获得专利。Elasticated webbing has been patented in Europe.

★专利证号 Patent No. : 97937154.9.

★★Teflon®是DuPont公司的品牌(聚四氟乙烯), 为DuPont公司的独家产品。

标准型安全带 Standard Harnesses

Miller标准型安全带是完全从使用者出发研发的符合所有工业及建筑行业需求的系列产品。标准的产品及一些附加的功能, 使得其成为性价比及功能兼备的坠落防护产品。

Miller Full-body Harness family is a complete range of user-friendly fall protection products that meets industry and construction compliance requirements. Standard products with some add-on features make it a cost-effective choice for fall protection.

- 全身式可调节设计, 一个规格的产品可适合所有身型
- 臀部托带设计确保使用者身体垂直
- 可滑动背部D型环佩戴更舒适
- 45mm宽胸带设计配金属调节扣
- Fully adjustable designs so one size fits all
- Sub-pelvic strap keeps the wearer upright
- Sliding back D-ring for a comfortable fit
- 45mm chest strap with metal buckle



订货号 Ref.: 10 118 90

Miller 单挂点全身安全带 Miller 1-point Harness

- 配有1个后部挂点的全身安全带
- One point harness, rear anchorage D-ring



订货号 Ref.: 10 118 91

Miller 双挂点全身安全带 Miller 2-point Harness

- 配有1个后部挂点和前胸编织带双挂环的全身安全带
- Two-point harness, rear anchorage D-ring and front anchorage webbing loops



订货号 Ref.: 10 118 94

Miller 双挂点全身安全带, 配有定位腰带 Miller 2-point Harness with Positioning Belt

- 配有1个后部挂点和前胸编织带双挂环, 配有定位腰带
- Two-point harness, rear anchorage D-ring and front anchorage webbing loops, complete with positioning belt



订货号 Ref.: 10 028 51 M/L

三挂点标准型全身安全带 3-Point Standard Harness

- 带后部挂点和2个前侧挂点的全身安全带
- Three-point harness, rear and front anchorage D-rings

经济型安全带 Value Harnesses

专为中国市场设计

Value product designed for China market

- 结构简单，穿戴方便
- 编织带材料，重量轻 降低工作强度
- 多种选择，经济耐用

- Simple structure, easy to wear
- Low weight webbing, reduce fatigue
- Multi-choices, cost saving



订货号 Ref. : DL-30

SPERIAN 单挂点全身安全带 SPERIAN 1-Point Full Body Harness

- 全身安全带，单挂点交叉式全身安全带（背部挂点）
- 1-point cross over full body harness (rear anchorage)



订货号 Ref. : DL-31

SPERIAN 双挂点全身安全带 SPERIAN 2-Point Full Body Harness

- 全身安全带，双挂点交叉式全身安全带（背部和前部挂点）
- 2-point cross over full body harness (rear and front anchorage)



订货号 Ref. : DL-35

SPERIAN 双挂点全身安全带 SPERIAN 2-Point Full Body Harness

- 全身安全带，双挂点交叉式全身安全带，配有定位腰带（背部和前部挂点，腰侧定位D型环）
- 2-point cross over full body harness with positioning belt (rear and front anchorage and side D rings)

救援安全带 Harnesses for Rescue



RAM 救援坐带 RAM Sit Harness

轻便灵活的救援坐带，适用于登山紧急救援类应用的短期使用，同时也可附加胸带，作为前挂点。

The easy to fit lightweight flexible sit harness is suitable for Mountain Rescue technicians where the harness is worn for short durations only. Can be used in conjunction with the ITC Chest harness for front fall arrest anchorage point.

订货号 Ref.: 10 102 52 (黑色black)



Polecat 救援坐带 Polecat Sit Harness

Polecat 安全坐带是架线员理想的坠落防护产品，同时也可附加胸带作为前挂点。

The Polecat Sit Harness offers the perfect solution for linesman when used in conjunction with the ITC Chest harness. Front ventral anchorage loop for rescue and rope access.

订货号 Ref.: 10 070 18

输电塔作业 Transmission Tower Works

RM 全身式安全带 RM Full-body Harness

弹性的肩带给予使用者极大的活动自由度，同时极大降低工作疲劳程度。

宽厚的腰垫和脚带给予悬吊作业极大的支撑。

前部挂环，提供配合抓绳器使用时的前部挂点。

Elasticated webbing on the shoulder straps stretches with the user to provide greater freedom of movement and comfort with reduced fatigue.

The padded belt and leg straps provide excellent support for work in suspension.

The front anchorage loops provide an ergonomic anchorage point for use with a rope grab.

订货号 Ref.: 10 034 38

IBX2R 全身式安全带 IBX2R Full-body Harness

This fall arrest and work-positioning harness offers excellent suspension comfort and minimises suspension trauma during rope access work. The lower belay loop and sternal attachment point provide an anchorage point for a descender and fall arrest device respectively.

本产品将坠落防护和工作定位的功能完美结合，提供最大的悬吊舒适性，同时将绳上作业可能产生创伤的机会减到最小。低位（腰部）的绳圈和D型环，为缓降器和其他坠落防护设备提供了坚实的挂点。

订货号 Ref.: 10 070 22

缓冲系带 Shock-absorbing Lanyards

带缓冲减震器的可伸缩系绳, 减少绊倒的危害

Stretchable shock-absorbing lanyard, for reduced tripping hazards

- 独一无二的伸缩设计, 提供使用者更大的机动性和安全性。
- 当收缩的时候 (正常状态), 它大大的减少了工作距离从而减少使用者被绊倒、钩挂和拖拽的可能性。
- 当不使用的时候可以通过产品上的安全扣加以固定从而减少绊倒危险
- A UNIQUE stretchable design for greater manoeuvrability and safety.
- When contracted, it greatly reduces the risks of tripping, snagging and dragging.
- A safety clip that straps on to the harness to hold the Manyard® when not in use, thus limiting tripping risks.



订货号 Ref.: 10 053 18

Miller Manyard™ 系带 Miller Manyard™ Lanyard

- 缓冲系带, 表面经过TEFLON®处理, 配有2个安全钩。
- Shock-absorbing lanyard with Teflon® finish, complete with two galvanised karabiners.



订货号 Ref.: 10 053 25

Miller Manyard™ 系带 Miller Manyard™ Lanyard

- 缓冲系带, 表面经过TEFLON®处理, 配有脚手架挂钩和安全钩。
- Shock-absorbing lanyard with Teflon® finish, complete with scaffold hook and galvanised karabiner.

Miller BackBiter® 反扣系带——第一种专为反扣设计的系带 Miller BackBiter® Tie-back lanyard: First lanyard designed for tie-back use

普通系带的编织带和抓钩—包括那些所谓的“可反扣”系带—它们的设计不可能承受系带反扣时产生的恶劣状况。Miller的新型BackBiter®反扣系带配有5K™抓钩，彻头彻尾是按照反扣用途设计的。

- 第一种在任何角度—包括锁闭，都可以承受2.5吨负载的抓钩
- 高强度Cordura®尼龙编织带可以提供比普通编织带高5倍的耐磨能力
- 一体式的系带，同时包括了Sofstop®缓冲包和挂点连接部件，减少了库存产品的品种，工人也更容易接受使用它。

The webbing and snap hooks of regular lanyards - and that includes the so-called “tie-back” lanyards available elsewhere - are not designed to withstand the rigors of tying back. The new Miller BackBiter® tie-back lanyard with a 5K™ snap hook was designed from top to bottom for tie-back use.

- First snap hook with a 5,000 lbs capacity from every angle - including the gate
- Heavy-duty Cordura® nylon webbing provides five times more abrasion resistance.
- All-in-one lanyard w/Sofstop® shock absorber and cross-arm anchorage connector reduces inventory and increase worker compliance.

现在，您终于可以第一次真正安全的将系带反扣来使用了！将普通的系带反扣使用是不安全的。过去不是，将来也不会！

Now, for the first time, you can tie-back SAFELY. Tying back with a regular lanyard is not safe. Never has been. Never will be.



订货号 Ref. : 913B-SN

Miller BackBiter® 缓冲系带 Miller BackBiter® Shock-absorbing Lanyard

- Miller BackBiter®缓冲系带，配有5K™抓钩
- Miller BackBiter® Lanyard w/5K snap hook



订货号 Ref. : 8798B-SN

Miller BackBiter® 双叉型缓冲系带 Miller BackBiter® Shock-absorbing Lanyard

- Miller BackBiter® 双叉型缓冲系带，配有5K™抓钩
- Miller Two-legged BackBiter® lanyard w/5K snap hooks

MILLER 缓冲减震系绳 Miller Shock-absorbing Lanyards



订货号 Ref. : 10 029 07 (2m)

Miller 缓冲系绳 Miller Shock-absorbing Lanyard


- 缓冲系绳, 带有2个安全钩
- shock-absorbing rope lanyard, complete with 2 karabiner



订货号 Ref. : 10 045 90 (2m)

Miller 缓冲系带 Miller Shock-absorbing Lanyard

- 双叉型编织缓冲系带, 带有1个安全钩和2个脚手架挂钩
- Double-leg webbing shock-absorbing lanyard, complete with a karabiner and two scaffold hooks

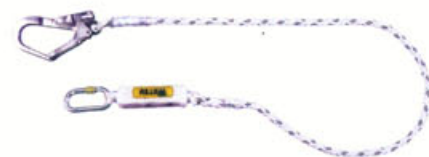

订货号 Ref. : 10 045 91 (2m)

Miller 缓冲系绳 Miller Shock-absorbing Lanyard

- 缓冲系绳, 配有1个脚手架挂钩和1个安全钩
- Shock-absorbing rope lanyard, complete with a scaffold hook and a galvanised karabiner

经济型缓冲系绳 Value Shock-absorbing Lanyards



订货号 Ref. : DL-50 (2m)

Miller 缓冲系绳 Miller Shock-absorbing Lanyard

- 12毫米粗, 配有1个抓钩和1个连接环
- 12mm rope, equipped with a snap hook and a connection loop



订货号 Ref. : DL-51 (2m)

Miller 缓冲系绳 Miller Shock-absorbing Lanyard

- 12毫米粗, 配有1个脚手架挂钩和1个连接环
- 12mm rope, equipped with a scaffold hook and a connection loop

限位系绳 Restraint Lanyards



订货号 Ref. : DL-55 (2m)

Miller 限位系绳 Miller Restraint Lanyard

- 12毫米粗，配有1个抓钩和1个连接环
- 12mm rope, equipped with a snap hook and a connection loop



订货号 Ref. : DL-56 (2m)

Miller 限位系绳 Miller Restraint Lanyard

- 12毫米粗，配有1个脚手架挂钩和1个连接环
- 12mm rope, equipped with a scaffold hook and a connection loop



订货号 Ref. : 10 028 81 (1m)

Miller 限位系绳 Miller Restraint Lanyard

- 带有1个绳圈和1个安全钩
- With loop and connector



订货号 Ref. : 10 101 41 (1.7m)

Miller Barracuda™ 脚手架缓冲系绳 Miller Barracuda™ Scaffolding Lanyard

- 缓冲系绳，配有竖向脚手架夹钩和安全钩
- Shock-absorbing rope lanyard, complete with vertical scaffold clamp and karabiner

新

绝佳的缓冲系绳升级方案
极其轻便的个人坠落限制器
The best alternative to
shock-absorbing lanyard



Miller Turbolite™ 系列坠落制动器 Miller Turbolite™ Self-retracting Lifeline

- 设计极其轻巧(仅0.86公斤)，可提供1.8米的工作长度。制动器本身可直接挂在安全带的后部挂点，使作业者的行动更加灵活及便利。
- 坚固的编织系带，耐磨性佳，使用寿命长。
- 高防腐性能的不锈钢、铝合金及抗冲击的聚合材质部件所组成，可在恶劣环境下使用，延长使用寿命，降低更换成本。
- 高强度、抗冲击的尼龙外壳，耐用可靠。
- 内置旋转接头，使用时防止系带旋转缠绕
- Extremely compact and lightweight (0.86kg) provides 1.8m working capacity lifeline; unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- Corrosion-resistant stainless steel, aluminum and high impact polymer internal components extend service life and reduce cost of ownership
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting

- 订货号 Ref. : MFL-1/6FT (1.8m) 配有1个抓钩和1个安全钩
equipped with a snap hook and a karabiner
- MFL-2/6FT (1.8m) 配有1个安全钩和1个脚手架挂钩
equipped with a scaffold hook and a karabiner
- MFL-3/6FT (1.8m) 配有1个抓钩
equipped with a snap hook

坠落限制器 Personal Fall Limiters

Miller Scorpion™个人坠落限制器 Miller Scorpion™ Personal Fall Limiter

- 体积小，重量轻-- Miller Scorpion™ 个人坠落限制器（PFL）在设计上利用了不易觉察的超顺畅，超安静技术。
- 快速反应，高强度不锈钢制动系统：可以将自由坠落制止在几英寸的距离内，有利于快速、安全的救援。
- 编织带缆绳涂有Teflon® HT*保护层：一层无形的保护，特别抗水和油，同时可防油脂、污垢和粉尘。
- 坠落指示器：指示该产品是否还能继续使用。
- Small, lightweight design – the Miller Scorpion PFL is virtually undetectable using ultra-smooth, ultra-quiet technology.
- Quick-activating, high-strength stainless steel braking system – arrests free falls within inches providing for a quick, safe rescue.
- Lifeline protected with Teflon® HT* - an invisible finish that provides superior water/oil repellency and protection against grease, dirt and grime.
- Visual load indicator – indicates the unit must be removed from service

新型的快速反应Miller Scorpion™ 个人坠落限制器（PFL）可以提供比传统的缓冲系绳更好的坠落防护。
The new, quick-activating Miller Scorpion™ Personal Fall Limiter (PFL) strikes a better defense than shock-absorbing lanyards.



Miller Scorpion™ 坠落制动器 Miller Scorpion™ Personal Fall Limiter (PFL)

Miller Scorpion™ 坠落制动器，两端配有连接环
Miller Scorpion™ Personal Fall Limiter, complete with two connector loop

订货号 Ref. : PFL-17/9FT (2.7m)

听力防护系列
Hearing Protection

眼部及面部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection



Miller Minilite™ 系列坠落制动器 Miller Minilite™ Fall Limiter

重量轻，体积小且配备自动回收和快速锁紧制动功能的坠落制动器，将坠落距离限制在以厘米计算的距离内。3米长度的自动伸缩带给使用者移动更大的自由度。高强度的复合材料外壳和耐腐蚀的内部结构，大大提升了使用寿命

The lightweight, palm-sized self-retracting fall arrest block with a quick activating braking system that limits freefall to centimetres. The 3 metre retractable webbing allows greater freedom of movement. The high-impact composite housing and corrosion resistant interior increase the product durability.

- 订货号 Ref. : 10 061 00 (3m) 配安全钩和标准挂钩
with karabiner and snap hook
- 10 061 01 (3m) 配安全钩和可旋转的挂钩
with karabiner and swivel snap hook
- 10 061 02 (3m) 配可旋转的脚手架挂钩和标准挂钩
with swivel scaffold hook and snap hook

坠落制动器 Fall Arrest Blocks

MI20

配备了缓冲减震包的MI20，最大工作长度：2.5米，大大降低了坠落冲击强度，同时配备两个基本点旋紧式安全钩。

Inertia reel fall arrester with a working capacity of 2.5m, the MI20 features an integral shock-absorber to reduce the impact force of a fall, and comes with two screw karabiners.



订货号 Ref. : 10 028 71 (2.5m)

Miller MightyLite™ 伸缩式安全索坠落制动器
Miller MightyLite™ Self-retracting Lifelines

一个坚固、使用防备、持久稳定的坠落制动器来源于冲压而成的钢制外壳、高品质的镀锌/不锈钢缆绳、独特的坠落指示器等众多特性。

Heavy-duty performance from a compact and easy-to-use block that features pressed steel housing, stainless steel springs and a fall indicator. Supplied with a swivel snap hook.



Miller MightyLite™ 坠落制动器
Miller MightyLite™ Fall arrest block

- 钢制外壳，编织带缆绳
- Steel housing blocks, complete with webbing cable

订货号 Ref. : 10 028 27 (6.2m)



Miller MightyLite™ 坠落制动器
Miller MightyLite™ Fall arrest block

- 钢制外壳，镀锌钢缆
- Steel housing block, galvanised wire

订货号 Ref. : 10 045 71 (10m)



Miller MightyLite™ 坠落制动器
Miller MightyLite™ Fall arrest block

- 钢制外壳，镀锌或不锈钢缆
- Steel housing block, galvanised wire or stainless steel

订货号 Ref. : 10 045 72 (20m)

10 045 94 (30m)

10 045 95 (40m)

RL175G/175FT (54m)

Miller Falcon™ 坠落制动器 Miller Falcon™ Self-retracting Lifelines

向您推荐市场上重量最轻，最坚固耐用的复合材料外壳坠落制动器。

Introducing the lightest, most rugged line of composite retractables on the market. Pound for pound the strongest, most durable, retractable lifeline available.

- 耐腐蚀：内部结构采用不锈钢和铝合金材料，延长了使用寿命并降低了更换费用。
- 市场上最轻的复合材料外壳坠落制动器：携带方便，操作轻松。
- 独特的单侧伸缩结构：减少缆绳伸缩时与壳体的摩擦而造成的磨损，伸缩更顺畅。
- 两端配有万向旋转接头（壳体 and 缆绳顶端），防止使用时缆绳上产生扭力。
- 坠落指示器：指示该产品是否还能继续使用。
- Corrosion-resistant: stainless steel and aluminum internal components extend service life and reduce replacement costs.
- Lightest composite unit on the market: easy to handle and transport to/from jobsites.
- Unique side payout design: reduces wear on the entry guide bushing and cable for smooth operation with less drag.
- Dual swivels (unit top and snap hook) included on all models too prevent lifeline from twisting during use.
- Visual load indicator - indicates the unit must be removed from service



订货号 Ref. : MP20G/20FT (6.2m)
MP30G/30FT (10m)

Miller Falcon™ 坠落制动器 Miller Falcon™ Fall Arrest Block

- 复合材料外壳，重量轻，镀锌钢缆
- composite housing lightweight block, galvanised wire



订货号 Ref. : MP50G/50FT (15m)
MP65G/65FT (20m)

Miller Falcon™ 坠落制动器 Miller Falcon™ Fall Arrest Block

- 复合材料外壳，重量轻，镀锌钢缆
- composite housing lightweight block, galvanised wire

Miller Black Rhino™ 坠落制动器 Miller Black Rhino™ Self-retracting lifeline

Miller Black Rhino™ 伸缩式安全索—向您推荐市场上体积最小、重量最轻的2.7米钢缆式坠落制动器！
Miller Black Rhino™ Self-retracting lifeline - Introducing the smallest and lightest 2.7m cable lifeline on the market!

- 在混凝土结构构建（建筑），焊接时和仓库中应用非常理想，这些使用场合要求坠落防护产品牢固耐用、安全可靠，只有钢缆式坠落制动器可以满足这样的条件。
- 2.7米的工作长度允许更大的活动空间，同时提高了生产力（工作效率）。
- 快速反应，高强度不锈钢制动系统：可以将自由坠落制止在几英寸的距离内，有利于快速、安全的救援。
- 坠落指示器：指示该产品是否还能继续使用。
- 配有安全钩
- Ideal for concrete construction, welding and warehouse applications that require durability and reliability that only a cable lifeline can provide
- 2.7m for working capacity offers greater mobility and increase productivity
- Quick-activating, high-strength stainless steel braking system - arrests free falls within inches providing for a quick, safe rescue.
- Visual load indicator - indicates the unit must be removed from service
- Complete with carabiner



Miller Black Rhino™ 坠落制动器 Miller Black Rhino™ Self-retracting Lifeline

- 坠落制动器，不锈钢缆绳，配有安全钩
- Self-retracting lifeline complete with stainless steel wire and carabiner

订货号 Ref. : CFL-2 (2.7m)

凭借超过20年在设计和生产绳索和钢缆抓绳器的成功经验，我们可以提供给您最简便、可靠且重量轻的产品。无论你是在坠落或滑脱的状态下，我们的产品都会立即将您紧紧的锁定在绳索或钢缆上。自动制动的抓绳器无须他人协助一人即可操作完成

No other supplier can match the proven performance and 20 year experience of Miller in rope grabs and cable grabs - years which have resulted in simple design and reliable lightweight products. In the event of a fall or slip, they lock onto the rope or cable, arresting the fall immediately. The automatic grabs follow the worker without assistance.



MG00 MicroLoc Cable Grab

MicroLoc 自动不锈钢钢缆抓绳器，完全符合EN353-1标准。可以适合众多已建成的爬梯系统，是危险工作环境的理想选择。

MicroLoc automatic stainless steel cable grab. Complies with EN353-1. For retrofitting onto existing ladder systems. Ideal for harsh environments.

订货号 Ref. : 10 028 68 (8mm)

自动及手动抓绳器 Automatic and Manual Rope Grabs

- 适合垂直、水平和有斜坡的工作需求
- 适合10/12mm or 14/16mm 的缆绳
- 垂直方向自动锁紧一无须人工干预，可在缆绳上自由滑动
- 水平方向的应用主要是人工定位，使用者将抓绳器锁紧在缆绳上做限定工作区域的用途，可以通过手工操作变换定位位置。
- Suitable for vertical, horizontal and sloping applications.
- Suitable for 10/12mm or 14/16mm rope.
- Automatic locking for vertical use - the rope glides freely over the line without manual intervention.
- Manual position for horizontal work. The user locks the grab on the rope for restraint purposes, and repositions it manually along rope.



Miller 抓绳器 Miller Rope Grab

- 自动和手动双功能抓绳器，不带系绳，适合 14mm/16mm 绳
- Automatic and manual rope grab without lanyard, suitable for 14mm/16mm rope

订货号 Ref. : 10 028 75



Miller 抓绳器 Miller Rope grab

- 自动和手动双功能抓绳器, 带有0.3米长的系绳, 适合 14mm/16mm 绳
- Automatic and manual rope grab with 0.3m lanyard, suitable for 14mm/16mm rope

订货号 Ref. : 10 028 76



Miller 安全绳 Miller Rope

- 10.5mm 安全绳
- 10.5mm Rope

订货号 Ref. : 10 045 12 (200m)



Miller 安全绳 Miller Rope

- 适用于 14mm/16mm 抓绳器
- Suitable for 14mm/16mm rope grabs

订货号 Ref. : 10 028 91 (10m)
10 028 92 (20m)
10 028 93 (30m)
10 028 94 (40m)
10 028 95 (50m)



Miller 工作定位系绳 Miller Work Positioning Lanyard

- 16毫米粗捻绳, 带有绳长调节器和1个抓钩
- 16mm twisted rope with rope adjuster and a snap hook

订货号 Ref.: DL-25



Miller 定位腰带 Miller Work Positioning Belt

- 工作定位和限位腰带
- Work positioning and restraint belt

订货号 Ref.: 10 028 62



Miller 工作定位腰带 Miller Work Positioning Belt

- 带有舒适透气的腰部衬托和2个腰侧D型环
- Airflow comfort back support with 2 lateral D rings

订货号 Ref.: DL-20



Miller 缓冲包 Miller Shock-absorbing Pack

- 缓冲包, 配有2个连接环
- Shock-absorbing pack, complete with two loops

订货号 Ref.: 10 082 82



Miller 吊带 Miller Sling

- 编织悬挂吊带
- Webbing anchorage sling

订货号 Ref.: 10 029 17 (0.8m)
10 029 19 (1.5m)



Miller 安全钩 Miller Karabiner

- 钢制螺纹锁紧安全钩, 18毫米开口
- Steel screw gate connector, 18mm opening

订货号 Ref.: 10 028 32



Miller 安全钩 Miller Karabiner

- 轻质合金扭转锁紧安全钩, 20毫米开口
- Light alloy twist lock karabiner, 20mm opening

订货号 Ref.: 10 028 34



Miller 脚手架挂钩 Miller Scaffold Hook

- 双截止合金脚手架挂钩, 63毫米开口
- Double action aluminium scaffold hook, 63mm opening

订货号 Ref.: 10 028 36



Miller 安全钩 Miller Karabiner

- 轻质合金螺纹锁紧安全钩, 16毫米开口
- Light alloy screw gate connectors, 16mm opening

订货号 Ref.: 10 043 24



订货号 Ref.: 751K/UBLU

Miller 焊工全身式安全带 Miller Welder Full-body Harness

- 蓝色阻燃Nomex® 编织带, 内芯采用用色彩醒目的黄色Kevlar®材料
- 特殊的编织带可以防护焊接火花
- 内芯材料增强强度和耐高温能力
- 鲜艳的颜色方便检查
- Blue, flame-retardant Nomex® webbing with contrasting yellow Kevlar® core
- Special webbing protects against weld splatter
- Inner core add strength and high temperature resistance
- Bright contrasting colors make inspection easier



订货号 Ref.: 907K/6FTBL (1.8m)

Miller 焊工缓冲系绳 Miller Welder Shock-absorbing Lanyard

- 特别设计的SofStop缓冲包采用蓝色阻燃Nomex® 编织带
- 内芯采用高强度Kevlar® 材料
- Specially designed SofStop absorber with blue, flame-retardant Nomex® cover.
- Heavy-duty Kevlar® back-up strap.



Miller 三脚架 Miller Tripod

- 铝制三脚架, 脚腿长度可调节带有橡胶垫, 高度2.1米
- Aluminium tripod, fully adjustable legs with rubber feet ,height 2.1m

订货号 Ref. : 10 050 41



Miller 绞盘 Miller Winch

- 操作简单, 机械效率5:1。带有超速制动系统。工作长度20米
- Easy operation,mechanical efficiency 5:1, with over-speed braking system, length 20m


订货号 Ref. : 10 050 42



Miller INDY 救援套件 Miller INDY Rescue Kit

- 自救套件, 包括INDY手控下降器, 20米安全绳, 悬挂吊带和存储包。
- Self rescue kit including an INDY descender, 20m rope, anchorage sling and storage bag.

订货号 Ref. : 10 060 26

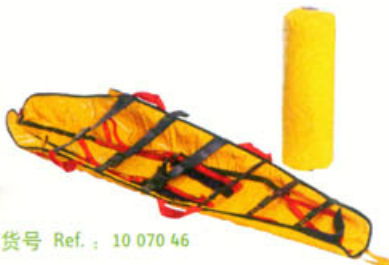

Miller 担架 Miller Stretcher

- 救援担架
- Rescue body splint

订货号 Ref. : 10 070 46



哪种高空防坠落系统对您最合适？

目前市面上有多种高空防坠落系统，但它们在设计和用途上有很多重大的差别。要选择最合适的系统，必须首先对其安全特点、功能、使用方便性进行综合评估。另外，还应该考虑其耐久性、维修保养的时间和成本以及长远价值。

针对不同的作业场合，高空防坠落系统的设计应当考虑到每个用途细节。这能将高空坠落的风险降到最低，并极大地提高工作效率。

Which fall protection system is most suitable for you?

Various systems are available in the market, but there are important differences in design and application. To be sure you choose the best system you need to firstly evaluate the feature, function, ease of use. And additionally durability, maintenance time and cost, and long term value should be assessed together.

In all cases, fall protection systems should be designed for each specific application. This will minimize the risk of a fall from height and maximize the efficiency of the work being carried-out.

我们的系统！

- Söll GlideLoc® 导轨系统
- Söll Xenon 水平钢缆系统
- Söll Xenon 头顶悬挂钢缆系统
- Söll Vi-Go 垂直钢缆系统

Our System

- Söll GlideLoc® System
- Söll Xenon Horizontal Lifeline System
- Söll Xenon Overhead System
- Söll Vi-Go Vertical Cable System

听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection


气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

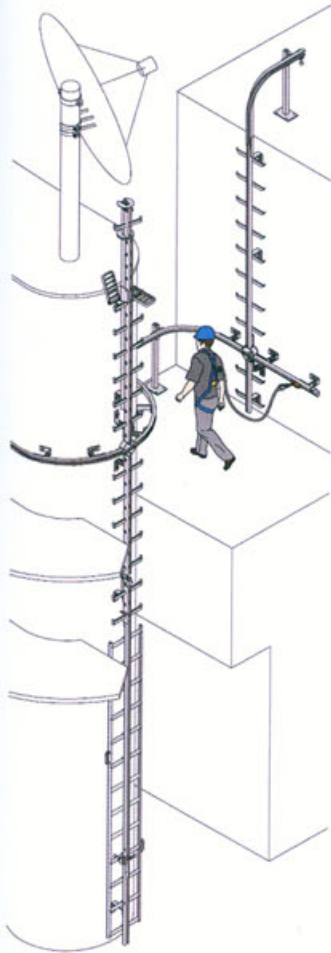

订货号: 按照方案整套订货
Ref. ; kit acc. to solution


Söll GlideLoc® 导轨系统是永久安装在大楼、高塔、天线杆等上的符合EN353-1标准的防坠落系统。其上装有能往返滑动的导轨型防坠落制动器。可以在现有的梯子上安装导轨系统，或者直接安装完整的安全爬梯系统。另外，我们还可以提供可固定在大多数结构上的各类安装夹具等零部件。
Söll GlideLoc®系统通过CE认证，符合全球安全标准（EN, OSHA, ANSI, AS/NZS, CAS, GB）。

Söll GlideLoc® is a climbing system, permanently installed on buildings, towers, masts, etc...comprising a guided type fall arrester, which glides up and down a steel or aluminium notched guide rail. The rails can be retrofitted to existing ladders, or alternatively are incorporated in a complete safe climbing system. A wide range of mounting brackets are available for fixing to most structures.

The GlideLoc® system is CE-certified and meets the international standards and regulations of EN, AS/NZS, CSA, OSHA, ANSI.

Söll GlideLoc® 导轨系统适用于：电信、无线电及电视地天线杆、建筑、供电及水电装备、风力设施及烟囱、工厂、大楼、石油化工单位、陆上和近海石油钻塔、造船业、起重机安装、竖井及检修孔、飞机修理库、火车及车辆地装卸场所等。

Söll GlideLoc® System is used in: telecommunications, radio and TV masts, construction, power supply and hydroelectric installations, wind power facilities, chimney and industrial plants, buildings and facades, petrochemical plants, on-shore and off-shore oil rigs, shipbuilding, crane installations, shafts and man-holes, aircraft hangars and for loading/unloading of trains and vehicles.

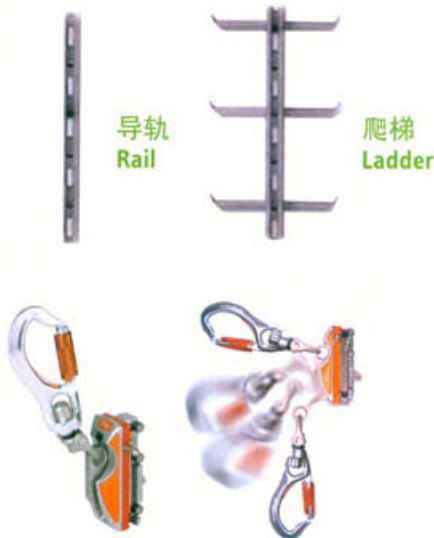

导轨
Rail

爬梯
Ladder



可折叠式休息平台
Folding footrest

十字转盘
Turntable

导轨撤离部件
Exit section

导向型坠落制动器
Guided fall arrester

Söll Xenon 水平钢缆系统 Söll Xenon Horizontal Lifeline System

Söll Xenon 水平钢缆系统是符合 EN795标准的水平全自动防坠落挂点装置。与市场上其它竞争产品相比，该产品更符合人体工程学原理，且构件数量更少。

Söll Xenon System is an automatic horizontal anchorage device, which complies with the requirements of EN 795.



Compared with other products in the market, Xenon products are designed more ergonomically, and there are fewer components.

Söll Xenon 水平钢缆系统适用于在高空的安装、维修和清洁等作业，可以用于工厂、大楼、起重机轨道、飞机修理库、大型体育场馆、火车及车辆地装卸场所等。

Söll Xenon System is used for installation, maintenance and cleaning at height, also in industrial plants, buildings, crane rails, aircraft hangars, big stadium, for loading/unloading of trains and vehicles.

订货号：按照方案整套订货

Ref. : kit acc. to solution

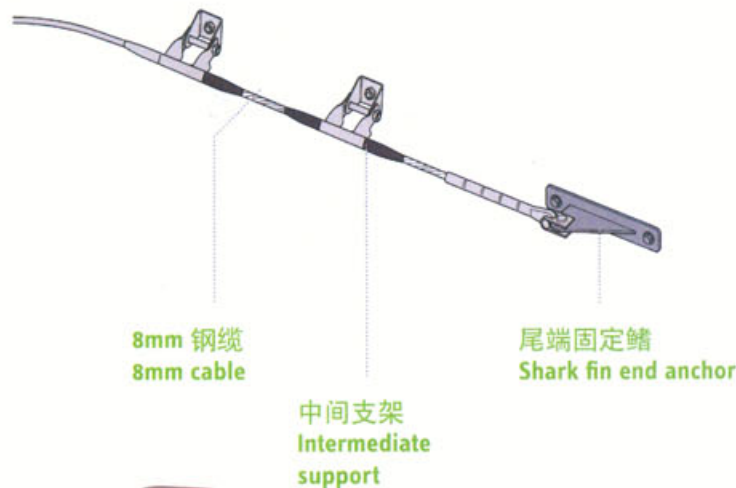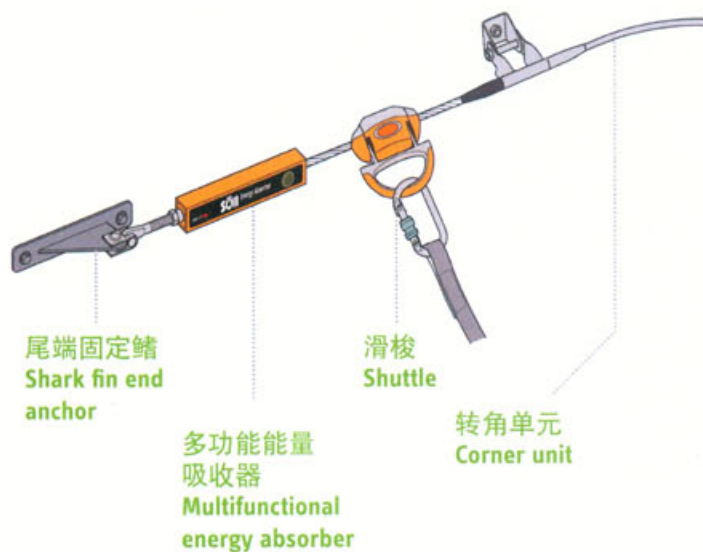

Söll Xenon 头顶悬挂钢缆系统 Söll Xenon Overhead System



订货号: 按照方案整套订货
Ref.: kit acc. to solution



滑梭
Shuttle


Söll Xenon 头顶悬挂钢缆系统安装于头顶, 符合EN795标准的水平全自动防坠落挂点装置。可以与垂直坠落制动器组合成覆盖垂直与水平方向的全方位的坠落防护系统。

Söll Xenon Overhead System is an automatic fall protection anchorage device, which complies with the requirements of EN 795 and is fixed above the user's position. It can be used with self-retracting fall arrester to cover wider fall protection area.



多功能量吸收器
Multifunctional energy absorber

Söll Vi-Go 垂直钢缆系统 Söll Vi-Go Vertical Cable System



订货号: 按照方案整套订货
Ref.: kit acc. to solution



钢缆张紧器
Cable tensioner

Söll Vi-Go 垂直钢缆系统是安装在已有的爬梯或者塔架上, 符合EN353-1标准的垂直全自动防坠落安全系统。基本组成为钢缆、张紧器和导向型防坠落制动器。

Söll Vi-Go is an automatic vertical fall protection system used in OEM or retrofitted onto existing climbing devices such as ladders or rungs, complies with EN 353-1. The principal components of the system are: cable, cable tensioner and fall arrester.

Söll Vi-Go vertical 垂直钢缆系统适用于风力塔、电力塔杆、电信塔、无线电及电视地天线杆、建筑等行业。

Söll Vi-Go Vertical System is used in wind turbine, power supply, telecommunication, radio and TV masts, construction, and others.



坠落制动器
Fall arrester



索引 Index

订购热线: 400-600-7758 网站: www.myehs.cn

听力防护系列
Hearing Protection




1 - 14

订货号 Ref.	名称描述 Description	页码 Page
1000107	Bilsom 303 带线耳塞 29NRR Bilsom 303 Earplug Corded	4
1005574	Bilsom 303 耳塞 29NRR Bilsom 303 Earplug without Cord	4
1006187	Bilsom 303 耳塞填充包 (200副/袋, 用于LS-400 分配器) Bilsom 303 Earplug (200 pairs/bag, For LS-400 dispenser)	6
1010276	Impact 电子耳罩 23NRR SPERIAN IMPACT earmuff 23NRR	13
1010421	SPERIAN Mach1 红色 经济型耳罩 18NRR SPERIAN Mach1 Red Economic Earmuff 18NRR	11
1010632	ImpactH 电子耳罩 21NRR SPERIAN IMPACT earmuff for helmet 21NRR	13
1010922	SPERIAN Leightning (L1) 海绵内衬 舒适型 耳罩 25NRR SPERIAN Leightning (L1) Earmuff 25NRR	7
1010923	SPERIAN Leightning (L2) 海绵内衬 舒适型 耳罩 27NRR SPERIAN Leightning (L2) Earmuff 27NRR	7
1010924	SPERIAN Leightning (L3) 海绵内衬 舒适型 耳罩 30NRR SPERIAN Leightning (L3) Earmuff 30NRR	7
1010925	SPERIAN Viking 1 可旋转头箍 多功能耳罩 25NRR SPERIAN Viking 1 Multiple-Position Band Earmuff 25NRR	14
1010926	SPERIAN Viking 2 可旋转头箍 多功能耳罩 27NRR SPERIAN Viking 2 Multiple-Position Band Earmuff 27NRR	14
1010927	SPERIAN Viking 3 可旋转头箍 多功能耳罩 29NRR SPERIAN Viking 3 Multiple-Position Band Earmuff 29NRR	14
1010928	SPERIAN Thunder (T1) 经济型耳罩 26NRR SPERIAN Thunder (T1) Economic Earmuff 26NRR	10
1010929	SPERIAN Thunder (T2) 耳罩 28NRR SPERIAN Thunder (T2) Earmuff 28NRR	10
1010970	SPERIAN Thunder (T3) 耳罩 30NRR SPERIAN Thunder (T3) Earmuff 30NRR	10
1011142	SPERIAN Clarity 1 人声传递型 耳罩 20NRR SPERIAN Clarity 1 Earmuff 20NRR	12
1011143	SPERIAN Clarity 1 (C1F) 可折叠, 人声传递型 耳罩 20NRR SPERIAN Clarity 1 (C1F) Folding Earmuff 20NRR	12
1011145	SPERIAN Clarity 2 可旋转头箍 人声传递型 耳罩 23NRR SPERIAN Clarity 2 Multiple-Position Band Earmuff 23NRR	12

订货号 Ref.	名称描述 Description	页码 Page
1011146	SPERIAN Clarity 3 人声传递型 耳罩 27NRR SPERIAN Clarity 3 Earmuff 27NRR	12
1011242	SPERIAN Clarity 1 (C1H) 安全帽型 耳罩 20NRR SPERIAN Clarity 1 (C1H) Hardhat Earmuff 20NRR	13
1011243	SPERIAN Clarity 3 (C3H) 安全帽型 耳罩 25NRR SPERIAN Clarity 3 (C3H) Hardhat Earmuff 25NRR	13
1011600	SPERIAN Thunder (T1F) 可折叠耳罩 25NRR SPERIAN Thunder (T1F) Folding Earmuff 25NRR	10
1011601	SPERIAN Thunder (T1H) 安全帽 耳罩 23NRR SPERIAN Thunder (T1H) Earmuff for Hardhat 23NRR	11
1011602	SPERIAN Thunder (T2H) 安全帽耳罩 25NRR SPERIAN Thunder (T2H) Earmuff for Hardhat 25NRR	11
1011603	SPERIAN Thunder (T3H) 安全帽耳罩 27NRR SPERIAN Thunder (T3H) Earmuff for Hardhat 27NRR	11
1011991	SPERIAN Leightning (L1H) 安全帽 耳罩 23NRR SPERIAN Leightning (L1H) Earmuff for Hardhat 23NRR	8
1011992	SPERIAN Leightning (L2H) 安全帽 耳罩 25NRR SPERIAN Leightning (L2H) Earmuff for Hardhat 25NRR	8
1011993	SPERIAN Leightning (L3H) 安全帽 耳罩 27NRR SPERIAN Leightning (L3H) Earmuff for Hardhat 27NRR	8
1011994	SPERIAN Leightning (L1N) 颈带型 耳罩 25NRR SPERIAN Leightning (L1N) NeckBand Earmuff 25NRR	8
1011995	SPERIAN Leightning (L2N) 颈带型 耳罩 26NRR SPERIAN Leightning (L2N) NeckBand Earmuff 26NRR	8
1011996	SPERIAN Leightning (L3N) 颈带型 耳罩 28NRR SPERIAN Leightning (L3N) NeckBand Earmuff 28NRR	8
1011997	SPERIAN Leightning (L2F) 折叠型 耳罩 27NRR SPERIAN Leightning (L2F) Folding Earmuff 27NRR	9
1017574	Bilsom 303 耳塞填充包 (500副/盒, 用于LS-500 分配器) Bilsom 303 Earplug (500 pairs/pack, For LS-500 dispenser)	6
BC-LPF1	SPERIAN Max Lite 国产包装耳塞 30 NRR SPERIAN MAX-Lite Earplug without Cord	3
BC-LPF30	SPERIAN Max Lite 国产包装带线耳塞 30NRR SPERIAN MAX-Lite Earplug Corded 30NRR	3
BC-QD30	SPERIAN Quiet 可重复使用带线耳塞 26NRR SPERIAN Quiet Reuseable Earplug Corded (Red) 26NRR	5
FUS30	SPERIAN Fusion 带线圣诞树耳塞 (大号 附简易小盒) 27NRR SPERIAN Fusion reuseable plug corded with box (large) 27NRR	5
FUS30S	SPERIAN Fusion 带线圣诞树耳塞 (小号 附简易小盒) 27NRR SPERIAN Fusion reuseable plug corded with box (small) 27NRR	5
LL-1	SPERIAN Laser Lite 耳塞 32 NRR SPERIAN Laser Lite Earplug 32 NRR	3
LL-30	SPERIAN Laser Lite 带线耳塞 32 NRR SPERIAN Laser Lite Corded Earplug 32 NRR	3
LL-LS4	SPERIAN Laser Lite 耳塞 填充包 (200副/袋, 用于LS-400 分配器) SPERIAN Laser Lite Earplug 32 NRR (For LS400 dispenser)	6

订货号 Ref.	名称描述 Description	页码 Page
LPF-1-D	Max Lite 耳塞填充包 (500副/盒, 用于LS-500 分配器) Max Lite Earplug (500 pairs/pack, For LS-500 dispenser)	6
LS-400	SPERIAN 经济型耳塞分配器 SPERIAN Earplug dispenser L-400	6
LS-500	SPERIAN 金属耳塞分配器 SPERIAN Earplug dispenser L400	6
MAX-1	SPERIAN Max 耳塞 33 NRR SPERIAN MAX Earplug without Cord	3
MAX-1-D	SPERIAN Max 耳塞 填充包 (500副/盒, 用于LS-500 分配器) SPERIAN MAX Earplug without Cord (For LS500 dispenser)	6
MAX-30	SPERIAN Max 带线耳塞 33NRR SPERIAN MAX Earplug Corded	3
MAX-LS4	SPERIAN Max 耳塞 填充包 (200副/袋, 用于LS-400 分配器) SPERIAN MAX Earplug without Cord (200 pairs / bag, For LS400 dispenser)	6
MTX-1-OR	SPERIAN Matrix 耳塞 桔红色 29NRR SPERIAN Matrix Orange Earplug 29NRR	4
MTX-1-OR-D	Matrix 耳塞填充包 (500副/盒, 用于LS-500 分配器) Matrix Earplug (500 pairs/pack, For LS-500 dispenser)	6
MTX-30-OR	SPERIAN Matrix 带线耳塞 桔红色 23NRR SPERIAN Matrix Orange Corded Earplug 23NRR	4
QB300	SPERIAN 头箍耳塞 替换耳塞 SPERIAN Earplug pack for QB3	4
QB3HYG	SPERIAN QB3 头箍耳塞 SPERIAN QB3 Band Earplug	4
SMF-30	SPERIAN SmartFit 可重复使用带线耳塞 (附小盒) 25NRR SPERIAN SmartFit Reusable Earplug 25NRR	5

眼脸部防护系列
Eye & Face Protection

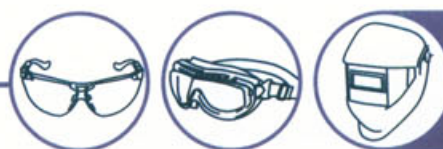

15 - 28

订货号 Ref.	名称描述 Description	页码 Page
1000.053	SPERIAN 9-13 舒适型 自动变光焊接面罩 SPERIAN 9-13 OSC Auto-Darkening Filter Helmet	27
1000.150	SPERIAN 5-9,9-13 Satellite 自动变光焊接面罩 SPERIAN 5-9,9-13 Satellite Auto-Darkening Filter Helmet	27
1001.085	SPERIAN 10-11 经济型 自动变光焊接面罩 SPERIAN 10-11 MIRA-PLUS Auto-Darkening Filter Helmet	27
2210	墙式洗眼器 Eyewash wall mount	25
2220	落地式洗眼器 Eye Washer	25
4028.015	颈部保护罩(皮质) Chest protection	28

订货号 Ref.	名称描述 Description	页码 Page
4220	复合式洗眼器带冲淋 Shower & Eye Wash Station	26
5000.105	SPERIAN 替换镜片 每包10片 (适用于舒适型经济型) SPERIAN Cover lens for OSC & Mira Plus (10ps/pack)	28
5000.212	SPERIAN Satellite面罩 外测保护片(5片/包) SPERIAN Cover lens for OSE (5ps/pack)	28
5000.300	SPERIAN 变光镜片内侧保护片 (5片/包) SPERIAN Inside cover lens, regular (5ps/pack)	28
5003.250	焊帽内头箍配件 Head band	28
5011.180	安全帽配件(用于安全帽配SPERIAN焊接面罩) Hardhat adaptor accessories	28
100001	Sperian VisiOTG-A 透明镜片 访客眼镜 Sperian VisiOTG-A Clear Lens	18
100002	Sperian VisiOTG-A 透明镜片 防雾 访客眼镜 Sperian VisiOTG-A Clear Lens Fog-Ban	18
100020	Sperian VL1-A 透明镜片 防雾眼镜 Sperian VL1-A Clear Lens Fog-Ban	20
100021	Sperian VL1-A 灰色镜片 防雾眼镜 Sperian VL1-A TSR GREY Lens Fog-Ban	20
100022	Sperian VL1-A Silver 淡银色镜片 防护眼镜 Sperian VL1-A Silver Mirror Lens HC	20
100100	Sperian S200A 透明镜片 防雾眼镜 (蓝色镜框) Sperian S200A Clear Lens Anti-Fog (Blue Frame)	17
100110	Sperian S200A 透明镜片 防雾眼镜 (黑色镜框) Sperian S200A Clear Lens Anti-Fog (Black Frame)	17
100111	Sperian S200A 灰色镜片 防雾眼镜 (黑色镜框) Sperian S200A Grey Lens Anti-Fog (Black Frame)	17
100200	Sperian S200A 透明镜片 耐刮擦眼镜 (蓝色镜框) Sperian S200A Clear Lens Hard Coating (Blue Frame)	17
100210	Sperian S200A 透明镜片 耐刮擦眼镜 (黑色镜框) Sperian S200A Clear Lens Hard Coating (Black Frame)	17
100211	Sperian S200A 灰色镜片 耐刮擦眼镜 (黑色镜框) Sperian S200A Grey Lens Hard Coating (Black Frame)	17
1002302	Sperian面屏支架(安全帽支架) Helmet-mounted Visor Holder (Plastic) (SA660)	22
1002312	Sperian 透明聚碳酸防护面屏(与1002302配合使用) Clear PC Visor (230mm)	22
1002325	Sperian 镀金防护面屏(与1002302配合使用) Gold-Coated Abrasion-Resistant Polycarbonate (230mm) (SV9PGFH)	22
1002330	Sperian聚酯酸酯绿色5#暗度防护面屏(与1002302配合使用) SW9A/5W Green Shade 5	22
1002341	Sperian防护面屏支架(含前额保护) Browguard With Ratchet Headband (CB20)	22
1002353	Sperian 透明聚碳酸防护面屏(与1002341配合使用) Clear PC Visor (200mm) (CV83P)	22

订货号 Ref.	名称描述 Description	页码 Page
1002360	Sperian 透明聚醋酸酯防化防护面屏(与1002341配合使用) Clear Acetate Visor (200mm) (CV84A)	22
1002781	Sperian MILLENNIA 黑色镜框 透明镜片 防雾 眼镜 Sperian MILLENNIA eyewear(black frame/clear lense/fogban)	19
1002782	Millennia Classic 防护眼镜黑色镜框,灰色防雾镜片 Sperian MILLENNIA black fram grey lens fog ban	19
1002783	Sperian MILLENNIA 蓝色镜框 透明镜片 防雾 眼镜 Sperian MILLENNIA eyewear(blue frame/clear lense/fogban)	19
1004947	Sperian OP-Tema 黑色可调节角度及长度镜框 透明镜片 防雾 眼镜 Sperian OP-Tema eyewear(black frame/clear lense/fogban)	18
1005212	Sperian MILLENNIA 黑色镜框 黄色镜片 防雾眼镜 Sperian MILLENNIA eyewear(black frame/yellow HDL lense/fogban)	19
1005504	LG10经济型护目镜 Sperian LG10 Goggle Clear Lens	21
1005985	Sperian Millennia sport 黑色镜框 透明镜片 防雾 眼镜 Sperian Millennia sport eyewear(black frame/clear lense/fogban)	19
1005986	Sperian Millennia sport 黑色镜框 灰色镜片 防雾 眼镜 Sperian Millennia sport eyewear(black frame/grey TSR lense/fogban)	19
1006193	V-MAXX 聚碳酸酯防雾护目镜 Sperian V-MAXX Goggle Indirect vent Anti-Fog Elastic	21
1006405	Millennia Classic 焊接防护眼镜黑色镜框,3号暗度镜片 Sperian MILLENNIA welding IR3	19
1006406	Millennia Classic焊接防护眼镜黑色镜框,5号暗度镜片 Sperian MILLENNIA welding IR5	19
1007506	Sperian V-MAXX 防化护目镜 (防雾镜片, 大视角, 橡胶头带) Sperian V-MAXX GOGGLE	21
1008111	V-MAXX聚碳酸酯防雾焊接用5号暗度护目镜 Sperian V-MAXX Fog Ban Welding IR5	21
1011378	Sperian 防雾产品专用清洁液喷剂(500毫升) Sperian clear 500ml spary bottle	26
1011379	Sperian 防雾产品专用清洁纸巾(500抽) Sperian clear lens tissue	26
1011380	Sperian 防雾产品清洁套装(1瓶500ml喷剂,1500抽纸巾) Sperian clear disposable station	26
32-000100	Sperian 便携式洗眼器I型(轻型,持续6分钟流量) Sperian Porta Stream I	24
32-000200	Sperian 便携式洗眼器II型(大容量,持续15分钟流量) Sperian Porta Stream II	24
32-001060	Sperian 便携式洗眼器推车 Sperian Universal Cart	25
32-001100	Sperian清水防腐剂 Sperian Eyesaline Preservative	24
32-001187	Sperian 便携式紧急冲淋器(附携带拎包) Sperian Emergency Shower with Carry Bag	25
BD-1150	WELD UP II 焊接护目镜 SPERIAN WELD UP II welding goggle	28

订货号 Ref.	名称描述 Description	页码 Page
BD-173B	Sperian 面屏头盔支架 Sperian Semi-Aluminum Bracket	23
BD-176B	Sperian 半头盔面屏支架 Sperian Headgear	23
BD-2720	标准焊接面罩 (含镜片) SPERIAN Standard welding helmet (with lenes)	28
BD-2820	焊接面罩 替换 透明镜片 SPERIAN Replacement lenes (clear)	28
BD-2821	焊接面罩 替换 黑色10号镜片 SPERIAN Replacement welding lenes (10°)	28
SE-173A	Sperian 透明防护屏 付铝边 Sperian Clear Visor	23
SE-174A	Sperian 绿色防护屏 Sperian Green Visor	23

呼吸防护系列
Respiratory Protection



29 - 52


订货号 Ref.	名称描述 Description	页码 Page
100600	SPERIAN汞蒸气、氯气气体防护滤盒 SPERIAN mercury vapor or chlorine	34
100800	SPERIAN综合气体防护滤盒 SPERIAN Multi contaminant	34
105005	SPERIAN P100 防尘过滤棉 SPERIAN P100 filter	34
105810	SPERIAN综合气体及防尘防护滤盒 SPERIAN Multi contaminant + P100	34
106010	SPERIAN N95防尘过滤棉 SPERIAN N95 filter	34
140174	滤棉支架 Retainer	34
311500	SPERIAN Premier系列硅胶半面罩(小号) SPERIAN Premium small silicone half mask	33
312500	SPERIAN Premier系列硅胶半面罩(中号) SPERIAN Premium medium silicone half mask	33
313500	SPERIAN Premier系列硅胶半面罩(大号) SPERIAN Premium large silicone half mask	33
321500	SPERIAN Premier Plus系列硅胶半面罩(小号) SPERIAN Premium Plus small silicone half mask	33
322500	SPERIAN Premier Plus系列硅胶半面罩(大号) SPERIAN Premium Plus medium/large silicone half mask	33
752000	SPERIAN OPTI-FIT系列硅胶全面罩(小号) SPERIAN Optifit silicone full face mask(small)	36

订货号 Ref.	名称描述 Description	页码 Page
762000	SPERIAN OPTI-FIT系列硅胶全面罩(中号) SPERIAN Optifit silicone full face mask(Medium)	36
772000	SPERIAN OPTI-FIT系列硅胶全面罩(大号) SPERIAN Optifit silicone full face mask(Medium)	36
1005584	5210 FFP2高性能防护口罩 SPERIAN 5210 ML (FFP2 disposable mask without valve)	31
1005586	5211 FFP2高性能防护口罩 (带阀) SPERIAN 5211 ML (FFP2 disposable mask with valve)	31
1005591	5140 FFP1高性能活性炭防护口罩(有机气体) SPERIAN 5140 ML (FFP1 and OV disposable mask without valve)	32
1011370	5240 FFP2高性能活性炭防护口罩 (有机气体) SPERIAN 5240 (FFP2 and OV disposable mask without valve)	31
1011371	5260 FFP2高性能活性炭防护口罩 (酸性气体) SPERIAN 5260 (FFP2 and AV disposable mask without valve)	31
1015790	SuperOne N95 舒适型防护口罩 SPERIAN SuperOne NBW95 (N95 disposable mask without valve)	32
1015791	SuperOne N95 舒适型防护口罩(带阀) SPERIAN SuperOne NBW95 (N95 disposable mask with valve)	32
1015855	SuperOne EN FFP1 舒适型防尘口罩 SuperOne EN FFP1 disposable mask	32
1710641	Cosmo黄EPDM双滤盒全面罩 Cosmo Yellow full face mask(for double filters)	36
1710643	Cosmo蓝EPDM单罐全面罩 Cosmo Blue full face mask(for single cartridge)	37
1715001	SPERIAN OPTI-FIT系列硅胶全面罩(小号) SPERIAN Optifit silicone full face mask(small)	37
1715011	SPERIAN OPTI-FIT系列硅胶全面罩(中号) SPERIAN Optifit silicone full face mask(Medium)	37
1715021	SPERIAN OPTI-FIT系列硅胶全面罩(大号) SPERIAN Optifit silicone full face mask(Medium)	37
1728500	EVAMASQUE 逃生过滤半面罩 (含过滤盒) EVAMASQUE half mask for escape (with filter)	34
1728555	EVAMASQUE 逃生过滤半面罩用滤盒 Filter for EVAMASQUE	34
1762983	MC95 流量调节器 MC95 flow controller	51
1781095	单罐全面罩防催泪瓦斯铝制过滤罐 Aluminum CS canister for full face mask	38
1783040	A2B2+P3 250型单罐全面罩有机气体及蒸气, 无机气体, 及防尘铝制过滤罐 A2B2+P3 250cc Aluminum canister for full face mask	38
1783140	汞P3 单罐全面罩铝制滤罐 HG P3 Aluminum canister for full face mask	38
1784000	A2B2E2K2+P3 450型单罐全面罩综合铝制过滤罐 A2B2E2K2+P3 450cc Aluminum canister for full face mask	38
1785040	A2B2 250型单罐全面罩有机气体及蒸气, 无机气体铝制过滤罐 A2B2 250cc Aluminum canister for full face mask	38

订货号 Ref.	名称描述 Description	页码 Page
1785622	A2B2E2K1 P3 NBC 450型, 单罐全面罩综合防恐铝制过滤罐 A2B2E2k1 P3 NBC 450cc Aluminum canister for full face mask	38
1786000	P3 颗粒单罐全面罩塑料过滤罐 P3 particulate filter for full face mask	38
1786200	碘, 放射性颗粒, 单罐全面罩铝制过滤罐 Iodine and raditional dust filter	38
B100100	SPERIAN有机气体防护滤盒 Survivair organci vapor	34
B100200	SPERIAN酸性气体防护滤盒 SPERIAN acid vapor	34
B100300	SPERIAN有机及酸性气体防护滤盒 SPERIAN organic+Acid vapor	34
B100400	SPERIAN氨气、甲基胺气体防护滤盒 SPERIAN Ammonia Methylamine	34
B250000	SPERIAN 2000系列半面罩(小号) SPERIAN 2000/small silicone half mask	34
B260000	SPERIAN 2000系列半面罩(中号) SPERIAN 2000/medium silicone half mask	34
B270000	SPERIAN 2000系列半面罩(大号) SPERIAN 2000/large silicone half mask	34
B290	中号双滤盒半面罩 Protech Half mask (Medium size)	35
BC1005584	801 N95 标准型防护口罩 SPERIAN 801(N95 disposable mask without valve)	32
BC1182011	消防指挥员型空气呼吸器(挎包式) Eva Pack escaping SCBA	51
BC1182021	AUTOPACK 逃生呼吸器(碳瓶) Auto Pack escaping SCBA	51
BC1182031	消防指挥员型呼吸器(背心式) SCBA for director of fire fighting	51
BC1763525-1	DE4过滤站组合配置(供一人使用) supplied air for 1 persons	52
BC1763525-2	DE4过滤站组合配置(供两人使用) supplied air for 2 persons	52
BC1763525-3	DE4过滤站组合配置(供三人使用) supplied air for 3 persons	52
BC1763525-4	DE4过滤站组合配置(供四人使用) supplied air for 4 persons	52
BC1766010	移动小车全配型(含4个Luxfer 6.8L气瓶) Air trolley full equipped system (With 4 Luxfer 6.8L cylinders)	52
BC1766011	移动小车全配型(含4个国产6.8L气瓶) Air trolley full equipped system (With 4 local 6.8L cylinders)	52
BC1766012	移动小车全配型(含4个Luxfer 9.0L气瓶) Air trolley full equipped system (With 4 Luxfer 9.0L cylinders)	52
BC1766013	移动小车标准型(不含气瓶) Air trolley standard system (Without cylinder)	52

订货号 Ref.	名称描述 Description	页码 Page
BC1766014	移动小车经济型 (不含气瓶) Air trolley basic system (Without cylinder)	52
BC1766015	移动小车经济型 (不锈钢车体, 不含气瓶) Air trolley basic system (stainless steel air trolley Without cylinder)	52
BC1766500	逃生系统升级套装 (用于经济型升级至标准型或全配型) Escape SCBA system for upgrade basic system to standard system or full equipped system	52
BC1788000	A2有机气体单罐全面罩塑料过滤罐 A2 250 cc plastic canister for full face mask	38
BC1788005	A2P3 250 cc 滤罐 B2P3 250 CC	38
BC1788010	B2无机气体单罐全面罩塑料过滤罐 B2 250 cc plastic canister for full face mask	38
BC1788015	B2P3 250 cc 滤罐 B2P3 250 CC	38
BC1788020	K2氨类衍生物,氨单罐全面罩塑料过滤罐 K2 250 cc plastic canister for full face mask	38
BC1788025	K2P3 250 cc 滤罐 B2P3 250 CC	38
BC1788070	A2B2P3有机,无机气体,颗粒单罐全面罩复合塑料过滤罐 A2B2P3 250 cc plastic canister for full face mask	38
BC1788075	A2B2有机,无机气体单罐全面罩复合塑料过滤罐 A2B2 250cc plastic canister for full face mask	38
BC1788150	A2B2E2K2有机,无机,酸性,氨类衍生物,氨,综合气体单罐全面罩塑料过滤罐 A2B2E2K2 450 cc plastic canister for full face mask	38
BC1788155	A2B2E2K2P3有机,无机,酸性,氨类衍生物,氨,颗粒单罐全面罩综合塑料过滤罐 A2B2E2K2P3 450 cc plastic canister for full face mask	38
F200	双滤盒半, 全面罩滤片 N95 particulate filter for half and full face mask	35
G100	G100 双滤盒半, 全面罩有机气体及蒸气(黑色)滤盒 G100 organic vapor filter for half and full face mask	35
G100-H404	G100-H404双滤盒半, 全面罩 复合滤盒 G100-H404 organic vapor + p100 filter for half and full face mask	35
G104	G104 双滤盒半, 全面罩酸性气体及蒸气(黄色)滤盒 G104 organic+Acid vapor filter for half and full face mask	35
G104-H404	G104-H404双滤盒半, 全面罩复合滤盒 G104-H404 organic+Acid vapor+p100 filter for half and full face mask	35
G106	G106双滤盒半, 全面罩氨、硫化氢(深绿色)滤盒 G106 Ammonia/Methylamine filter for half and full face mask	35
G106-H404	G106-H404 双滤盒半, 全面罩复合滤盒 G106-H404 Ammonia/Methylamine+p100 filter for half and full face mask	35
G110	G110双滤盒半, 全面罩(有机酸性气体及蒸气、氨、硫化氢(浅绿色)综合滤盒 G110 Multi contaminant filter for half and full face mask	35
G110-H404	G110-H404 双滤盒半, 全面罩复合滤盒 G110-H404 Multi contaminant+p100 filter for half and full face mask	35
G404	HEPA(P100)双滤盒半, 全面罩防尘滤盒 P100 filter particulate filter(NIOSH standard) for half and full face mask	35

订货号 Ref.	名称描述 Description	页码 Page
SCBA105	C900呼吸器PANO面罩6.8L Luxfer气瓶 C900 SCBA PANO mask 6.8L Luxfer cylinder	46
SCBA108	C900 正压式空气呼吸器(4.7L LUXFER碳瓶) C900 SCBA (4.7L cylinder)	46
SCBA123	C900呼吸器PANO面罩6.8L Luxfer气瓶带表 C900 SCBA PANO mask 6.8L cylinder (gauge)	46
SCBA124	C900呼吸器PANO面罩6.8L Luxfer双气瓶 C900 SCBA PANO mask double 6.8L cylinders	46
SCBA126	C900呼吸器PANO面罩9L Luxfer气瓶 C900 SCBA PANO mask 9L cylinder	46
SCBA205	C850呼吸器PANO面罩6.8L国产气瓶 C850 SCBA PANO mask 6.8L cylinder	46
SCBA215	C850呼吸器PANO面罩6.8L国产气瓶带表 C850 SCBA PANO mask 6.8L cylinder (gauge)	46
SCBA305	COUGAR 正压式空气呼吸器 45分钟 SURVIVAIR 原装碳瓶 COUGAR SCBA 45mins fully imported SURVIVAIR cylinder	47
SCBA325	Cougar 6.9L双面表瓶防自锁进口 Cougar SCBA 6.9L carbon cyinder (gauge locking wheel) total imported	47
SCBA345	COUGAR 正压式空气呼吸器 60分钟 SURVIVAIR 原装碳瓶 COUGAR SCBA 60 mins fully imported SURVIVAIR cylinder with locking wheel	47
SCBA805	T8000 标准呼吸器 (6.8L luxfer 气瓶, PANO 面罩) T8000 SCBA (6.8L Luxfer Cylinder, PANO Mask)	42
SCBA825	T8000 标准呼吸器 (6.8L luxfer 气瓶, Survivair 20/20plus 面罩) T8000 SCBA (6.8L Luxfer Cylinder, Survivair 20/20plus Mask)	42
SCBA845	T8000 全欧标 标准呼吸器 (6.8L 欧标认证气瓶, Survivair 20/20plus 面罩) T8000 full EN certified SCBA (6.8L EN certified Cylinder, Survivair 20/20plus Mask)	42
SCBA809	T8000 标准呼吸器 (9L luxfer 气瓶, PANO 面罩) T8000 SCBA (9L Luxfer Cylinder, PANO Mask)	42
SCBA829	T8000 标准呼吸器 (9L luxfer 气瓶, Survivair 20/20plus 面罩) T8000 SCBA (9L Luxfer Cylinder, Survivair 20/20plus Mask)	42
SCBA849	T8000 全欧标 标准呼吸器 (9L 欧标认证气瓶, Survivair 20/20plus 面罩) T8000 full EN certified SCBA (9L EN certified Cylinder, Survivair 20/20plus Mask)	42
SCBA805T	T8000 他救呼吸器 (6.8L luxfer 气瓶, PANO 面罩) T8000 SCBA with buddy breather (6.8L Luxfer Cylinder, PANO Mask)	42
SCBA825T	T8000 他救呼吸器 (6.8L luxfer 气瓶, Survivair 20/20plus 面罩) T8000 SCBA with buddy breather (6.8L Luxfer Cylinder, Survivair 20/20plus Mask)	42
SCBA809T	T8000 他救呼吸器 (9L luxfer 气瓶, PANO 面罩) T8000 SCBA with buddy breather (9L Luxfer Cylinder, PANO Mask)	42
SCBA829T	T8000 他救呼吸器 (9L luxfer 气瓶, Survivair 20/20plus 面罩) T8000 SCBA with buddy breather (9L Luxfer Cylinder, Survivair 20/20plus Mask)	42



订货号 Ref.	名称描述 Description	页码 Page
54-37-01	TOXI VISION CO配碱性电池 TOXI VISION CO Alkaline gas detector	57
54-37-02	TOXI VISION H ₂ S配碱性电池 TOXI VISION H ₂ S Alkaline gas detector	57
54-37-80A	ToxiVision EX单通道可燃气体检测仪配碱性电池 ToxiVision EX LEL gas detector with alkaline	57
54-37-80N	Toxivision EX单通道可燃气体检测仪配充电电池 ToxiVision EX LEL gas detector rechargeable	57
54-37-90	TOXI VISION O ₂ 配碱性电池 TOXI VISION O ₂ Alkaline gas detector	57
54-38-06	TOXI VISION 手动采样泵 TOXI VISION manual sample draw kit	57
54-39-01	TOXI VISION CO 传感器 TOXI VISION CO sensor	57
54-39-02	TOXI VISION H ₂ S 传感器 TOXI VISION H ₂ S sensor	57
54-39-90	TOXI VISION O ₂ 传感器 TOXI VISION O ₂ sensor	57
54-40-30000A	Multi Vision LEL/O ₂ 配碱性电池 Multi Vision LEL/O ₂ Alkaline gas detector	61
54-40-30000N	Multi Vision LEL/O ₂ 配充电电池 Multi Vision LEL/O ₂ Nimh gas detector	61
54-40-30100A	Multi Vision LEL/O ₂ /CO 配碱性电电池 Multi Vision LEL/O ₂ /CO Alkaline gas detector	61
54-40-30100N	Multi Vision LEL/O ₂ /CO 配充电电池 Multi Vision LEL/O ₂ /CO Nimh gas detector	61
54-40-30102A	Multi Vision LEL/O ₂ /CO/H ₂ S 配碱性电池 Multi Vision LEL/O ₂ /CO/H ₂ S Alkaline gas detector	61
54-40-30102N	Multi Vision LEL/O ₂ /CO/H ₂ S 配充电电池 Multi Vision LEL/O ₂ /CO/H ₂ S Nimh gas detector	61
54-40-30200A	Multi Vision LEL/O ₂ /H ₂ S 配碱性电池 Multi Vision LEL/O ₂ /H ₂ S Alkaline gas detector	61
54-40-30200N	Multi Vision LEL/O ₂ /H ₂ S 配充电电池 Multi Vision LEL/O ₂ /H ₂ S Nimh gas detector	61
54-41-007	Multi Vision手动采样套件 MULTI VISION manual sample draw kit	61
54-42-01	Multi Vision CO 传感器 Multi Vision CO sensor	61
54-42-02	Multi Vision H ₂ S 传感器 Multi Vision H ₂ S sensor	61
54-42-80C	Multi Vision LEL 传感器 Multi Vision LEL sensor	61

订货号 Ref.	名称描述 Description	页码 Page
54-42-90	Multi Vision O ₂ 传感器 Multi Vision O ₂ sensor	61
54-45-01	ToxiPro CO单一气体检测仪 ToxiPro CO	55
54-45-02	ToxiPro H ₂ S单一气体检测仪 ToxiPro H ₂ S	55
54-45-18	ToxiPro Cl ₂ 单一气体检测仪 ToxiPro Cl ₂	55
54-45-21	ToxiPro MH ₃ 单一气体检测仪 ToxiPro MH ₃	55
54-45-90	ToxiPro O ₂ 单一气体检测仪 ToxiPro O ₂	55
54-46-104	ToxiPro手动采样泵 ToxiPro manual sample draw kit	55
54-46-9000	IQ Express 自动检测标测定仪 IQ Express Docking Station	63
54-47-01	ToxiPro CO传感器 ToxiPro CO sensor	55
54-47-02	ToxiPro H ₂ S传感器 ToxiPro H ₂ S sensor	55
54-47-18	ToxiPro Cl ₂ 传感器 ToxiPro Cl ₂ sensor	55
54-47-21	ToxiPro MH ₃ 传感器 ToxiPro MH ₃ sensor	55
54-47-90	ToxiPro O ₂ 传感器 ToxiPro O ₂ sensor	55
54-48-100A	MultiPro LEL气体检测仪配碱性电池 MultiPro LEL with alkaline	59
54-48-100N	MultiPro LEL气体检测仪配充电电池 MultiPro LEL rechargeable include charger	59
54-48-300A	MultiPro LEL/O ₂ 复合式气体检测仪配碱性电池 MultiPro LEL/O ₂ with alkaline	59
54-48-300N	MultiPro LEL/O ₂ 复合式气体检测仪配充电电池 MultiPro LEL/O ₂ with NI-LON include charger	59
54-48-301A	MultiPro LEL/O ₂ /CO 复合式气体检测仪配碱性电池 MultiPro LEL/O ₂ /CO with alkaline	59
54-48-301N	MultiPro LEL/O ₂ /CO 复合式气体检测仪配充电电池 MultiPro LEL/O ₂ /CO with NI-LON include charger	59
54-48-302A	MultiPro LEL/O ₂ /H ₂ S 复合式气体检测仪配碱性电池 MultiPro LEL/O ₂ /H ₂ S with alkaline	59
54-48-302N	MultiPro LEL/O ₂ /H ₂ S 复合式气体检测仪配充电电池 MultiPro LEL/O ₂ /H ₂ S with NI-LON include charger	59
54-48-314A	MultiPro LEL/O ₂ /(CO/H ₂ S)碱电池 MultiPro LEL/O ₂ /(CO/H ₂ S) gas detector, alkaline	59
54-48-314N	MultiPro LEL/O ₂ /(CO/H ₂ S) 复合式气体检测仪配充电电池 MultiPro LEL/O ₂ /(CO/H ₂ S) gas detector,rechargeable	59

L2F



折叠型 Folding – L2F

- 折叠后便于储藏和携带
- Convenient folding design for easy storage

订货号 Ref. 10 119 97 L2F 27 NRR

Leightning® L2F

频率 (赫兹) Frequency/Hz	125	250	500	1000	2000	3150	4000	6300	8000
平均衰减 (分贝) Mean Attn.(dB)	21.5	26.8	31.8	34.7	32.0	37.7	37.5	38.6	39.9
标准偏差 (分贝) Std. Dev.(dB)	2.9	2.6	2.5	1.9	2.1	2.8	2.5	2.4	2.8

气流控制技术 Air Flow Control

- Bilsom 专利的气流控制技术在不需要增加耳罩尺寸和重量的前提下为所有频率提供最优的噪声衰减。专利技术的耳罩空腔和高科技无纺耳罩垫能够有效的使耳罩中的气流控制声音如何到达耳朵。
- 几乎所有工业噪声环境中更佳的总体衰减效果。气流控制技术是所有 Lightning, Thunder 以及 Viking 系列耳罩的一个标准特征。
- Bilsom Technology's patented Air Flow Control delivers optimal attenuation across all frequencies, without increasing earmuff size or weight. A patented base plate chamber and high-tech non-woven layer manage the flow of air inside the earmuff to control how sound reaches the ear.
- More consistent overall attenuation for virtually all industrial noise environment. Air Flow Control is a standard feature on all Lightning, Thunder and Viking series earmuff.

听力防护系列
Hearing Protection

眼部防护系列
Eye & Face Protection

呼吸防护系列
Respiratory Protection

气检测仪系列
Instrumentation

手部防护系列
Protective Gloves

防护服系列
Protective Clothing

足部防护系列
Foot Protection

坠落防护系列
Fall Protection

订货号 Ref.	名称描述 Description	页码 Page
54-49-01	MultiPro CO传感器 MultiPro CO sensor	59
54-49-02	MultiPro H ₂ S传感器 MultiPro H ₂ S sensor	59
54-49-102	MultiPro自动采样泵 MultiPro continuous sample pump	59
54-49-105	MultiPro手动采样套件 MultiPro manual sample draw kit	59
54-49-14	MultiPro CO/H ₂ S传感器 MultiPro CO/H ₂ S sensor	59
54-49-80	MultiPro LEL传感器 MultiPro LEL sensor	59
54-49-90	MultiPro O ₂ 传感器 MultiPro O ₂ sensor	59
54-49-9000	MultiPro IQ Express 自动检测标定仪 MultiPro IQ Express Docking Station	65
BC54-20-0320C	SCBA 自动综合检测仪 SCBA auto detector	67

手部防护系列
Protective Gloves



69 - 82

订货号 Ref.	名称描述 Description	页码 Page
2000044-09	焊接手套(尺寸:9) General welding gloves,09	79
2000044-10	焊接手套(尺寸:10) General welding gloves,10	79
2012847-08	皮革焊接隔热手套(尺寸:8) Welding Glove,08	79
2012847-09	皮革焊接隔热手套(尺寸:9) Welding Gloves,09	79
2012847-10	皮革焊接隔热手套(尺寸:10) Welding Gloves,10	79
2012898-09	绝缘手套外用防护手套(中压),尺寸:9 Overglove MT (Class 1),09	77
2012898-10	绝缘手套外用防护手套(中压),尺寸:10 Overglove MT (Class 1),10	77
2012899-09	绝缘手套外用防护手套(高压),尺寸:9 Overglove HT (Class 2 and 3),09	77
2012899-10	绝缘手套外用防护手套(高压),尺寸:10 Overglove HT (Class 2 and 3),10	77
2032101-08	贴皮KEVLAR耐磨防割手套(尺寸:8) Kevlar with leather cut resistant gloves,09	75

订货号 Ref.	名称描述 Description	页码 Page
2032101-09	贴皮KEVLAR耐磨防割手套(尺寸:9) Kevlar with leather cut resistant gloves,09	75
2032625	TERRY 隔热防护手套 Terry heat resistant gloves	82
2032688-09	THERMAKEV 凯夫拉隔热耐高温手套 (可选尺寸: 9) Thermakev gloves	81
2058685-09	高性能防冻手套(尺寸:9) Cold resistant gloves,09	82
2058685-10	高性能防冻手套(尺寸:10) Cold resistant gloves,10	82
2091903-09	电工绝缘手套500V(尺寸:9) Electrosoft 500V 00 G,09	77
2091903-10	电工绝缘手套500V(尺寸:10) Electrosoft 500V 00 G,10	77
2091907-09	电工绝缘手套1000V(尺寸:9) Electrosoft 1000V 0 G,09	77
2091907-10	电工绝缘手套1000V(尺寸:10) Electrosoft 1000V 0 G,10	77
2091912-09	电工绝缘手套7500V(尺寸:9) Electrosoft 7500V 1 G,09	77
2091912-10	电工绝缘手套7500V(尺寸:10) Electrosoft 7500v 1 G,10	77
2091921-09	电工绝缘手套17000V(尺寸:9) Electrosoft 17000V 2 G,09	77
2091921-10	电工绝缘手套17000V(尺寸:10) Electrosoft 17000V 2 G,10	77
2091941-10	电工绝缘手套36000V(尺寸:10) Electrosoft 36000V 4 G,10	77
2091941-11	电工绝缘手套36000V(尺寸:11) Electrosoft 36000V 4 G,11	77
2094831-08	丁腈防化手套(尺寸:8) Nitrile chemical protective gloves,08	78
2094831-09	丁腈防化手套(尺寸:9) Nitrile chemical protective gloves,09	78
2094831-10	丁腈防化手套(尺寸:10) Nitrile chemical protective gloves,10	78
2095020-08	氯丁橡胶轻型防化手套(尺寸:8) Neoprene light chemical protective gloves,08	78
2095020-09	氯丁橡胶轻型防化手套(尺寸:9) Neoprene light chemical protective gloves,09	78
2095020-10	氯丁橡胶轻型防化手套(尺寸:10) Neoprene light chemical protective gloves,10	78
2095025-08	氯丁橡胶防化长手套(尺寸:8) Neoprene light long chemical protective gloves,08	78
2095025-09	氯丁橡胶防化长手套(尺寸:9) Neoprene light long chemical protective gloves,09	78

订货号 Ref.	名称描述 Description	页码 Page
2095025-10	氯丁橡胶防化长手套(尺寸:10) Neoprene light long chemical protective gloves,10	78
2100250CN-06	掌部PU涂层灰色工作手套(尺寸:6) PU First Grey,06	73
2100250CN-07	掌部PU涂层灰色工作手套(尺寸:7) PU First Grey,07	73
2100250CN-08	掌部PU涂层灰色工作手套(尺寸:8) PU First Grey,08	73
2100250CN-09	掌部PU涂层灰色工作手套(尺寸:9) PU First Grey,09	73
2100250CN-10	掌部PU涂层灰色工作手套(尺寸:10) PU First Grey,10	73
2132255CN-06	掌部PU涂层白色工作手套(尺寸:6) PU First white,06	73
2132255CN-07	掌部PU涂层白色工作手套(尺寸:7) PU First white,07	73
2132255CN-08	掌部PU涂层白色工作手套(尺寸:8) PU First white,08	73
2132255CN-09	掌部PU涂层白色工作手套(尺寸:9) PU First white,09	73
2132255CN-10	掌部PU涂层白色工作手套(尺寸:10) PU First white,10	73
2201135	KERMEL 高性能隔热手套 KERMEL heat resistant gloves	80
2232230CN-08	丁腈涂层工作手套(尺寸:8) Nitrifit,08	74
2232230CN-09	丁腈涂层工作手套(尺寸:9) Nitrifit,09	74
2232240CN-06	指尖PU涂层白色工作手套(尺寸:6) Perfect Poly® Finger,06	73
2232240CN-07	指尖PU涂层白色工作手套(尺寸:7) Perfect Poly® Finger,07	73
2232240CN-08	指尖PU涂层白色工作手套(尺寸:8) Perfect Poly® Finger,08	73
2232240CN-09	指尖PU涂层白色工作手套(尺寸:9) Perfect Poly® Finger,09	73
2232240CN-10	指尖PU涂层白色工作手套(尺寸:10) Perfect Poly® Finger,10	73
2232244CN-08	Dyneema防割手套(尺寸:8) Dyneema with PU palm gloves,08	75
2232244CN-09	Dyneema防割手套(尺寸:9) Dyneema with PU palm gloves,09	75
2232270CN-08	发泡丁腈涂层工作手套(尺寸:8) Nitrifit Black Foam,08	74
2232270CN-09	发泡丁腈涂层工作手套(尺寸:9) Nitrifit Black Foam,08	74

订货号 Ref.	名称描述 Description	页码 Page
2233025-08	尼龙点塑防割手套(尺寸:8) High Tenacity Nylon gloves,08	76
2233025-09	尼龙点塑防割手套(尺寸:9) High Tenacity Nylon glove,09	76
2270533-09	玻璃制造用防割手套(可选尺寸: 9) Verrier	82
2275112	ZETEX高性能隔热手套 Zetex heat resistant gloves	80
2280673	Super Therma 耐高温手套 SUPER-THERMA	81
2281561-09	消防员手套(尺寸: 9) Fireman gloves,09	81
2281561-10	消防员手套(尺寸: 10) Fireman gloves,10	81
2500000R0302	Chainex 金属防割短手套,XXS Metal Mesh - Chainex (short),XXS	76
2500001R0302	Chainex 金属防割短手套,XS Metal Mesh - Chainex (short),XS	76
2500002R0302	Chainex 金属防割短手套,S Metal Mesh - Chainex (short),S	76
2500003R0302	Chainex 金属防割短手套,M Metal Mesh - Chainex (short),M	76
2500004R0302	Chainex 金属防割短手套,L Metal Mesh - Chainex (short),L	76
2500005R0302	Chainex 金属防割短手套,XL Metal Mesh - Chainex (short),XL	76
4402835	ARMKEV 凯夫拉护臂 General kevlar sleeves	76

防护服系列
Protective Clothing



83 - 92

订货号 Ref.	名称描述 Description	页码 Page
1410003	镀铝隔热鞋罩 Aluminised heat resistant shoe cover	88
1410113	镀铝隔热长风衣 Aluminized Over Coat A950	87
1410155	镀铝隔热头罩 Aluminised heat resistant helmet	88
4111831	AIR PLUME 避火隔热服 Fire protective clothing-AIR PLUME	86
4111839	B2 避火隔热服 Fire protective clothing-B2	85

订货号 Ref.	名称描述 Description	页码 Page
4571433	MS 3.5.6轻型防化服 MS 3.5.6 Chemical protective clothing	92
8527339	核防护类通风头罩 Nuclear protective helmet	89
1400019C-M-42	重型防化服(内置式)-M- 42 Heavy Chemical protective clothing with SCBA inside	90
1400019C-M-43/44	重型防化服(内置式)-M- 43/44 Heavy Chemical protective clothing with SCBA inside	90
1400020-S-40	EasyChem 外置式重型防化服-S-40 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-S-42	EasyChem 外置式重型防化服-S-42 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-S-44	EasyChem 外置式重型防化服-S-44 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-M-40	EasyChem 外置式重型防化服-M-40 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-M-42	EasyChem 外置式重型防化服-M-42 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-M-44	EasyChem 外置式重型防化服-M-44 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-L-40	EasyChem 外置式重型防化服-L-40 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-L-42	EasyChem 外置式重型防化服-L-42 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-L-44	EasyChem 外置式重型防化服-L-44 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-XL-40	EasyChem 外置式重型防化服-XL-40 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-XL-42	EasyChem 外置式重型防化服-XL-42 EasyChem Heavy chemical protective clothing with SCBA outside	90
1400020-XL-44	EasyChem 外置式重型防化服-XL-44 EasyChem Heavy chemical protective clothing with SCBA outside	90
1410F34.048	镀铝隔热上衣S号 Aluminized kevlar 370K jacket K900,S	87
1410F34.052	镀铝隔热上衣M号 Aluminized kevlar 370K jacket K900,S	87
1410F34.056	镀铝隔热上衣L号 Aluminized kevlar 370K jacket K900,S	87
1410F34.060	镀铝隔热上衣XL号 Aluminized kevlar 370K jacket K900,S	87
1410F35.048	镀铝隔热下装S号 Aluminized kevlar 370K TROUSERS K901,S	87
1410F35.052	镀铝隔热下装M号 Aluminized kevlar 370K TROUSERS K901,S	87
1410F35.056	镀铝隔热下装L号 Aluminized kevlar 370K TROUSERS K901,S	87

订货号 Ref.	名称描述 Description	页码 Page
1410F35.060	镀铝隔热下装XL号 Aluminized kevlar 370K TROUSERS K901,S	87
4102334-42	B1PU避火隔热服 Fire protective clothing - B1PU	85
4180149-03	SPACEL PLUS 3000 (164cm-176cm)	92
4180149-04	SPACEL PLUS 3000 (176cm-188cm)	92
4180149-05	SPACEL PLUS 3000 (188cm-200cm)	92
4481211-01	核防护类通风气衣 (164cm-170cm) Nuclear protective clothing (164cm-170cm)	89
4481212-02	核防护类通风气衣 (170cm-176cm) Nuclear protective clothing (170cm-176cm)	89
4481213-03	核防护类通风气衣 (176cm-182cm) Nuclear protective clothing (176cm-182cm)	89
4481214-04	核防护类通风气衣 (182cm-188cm) Nuclear protective clothing (182cm-188cm)	89
AP4571450	DS201一次性防护服 DS201 Light chemical protective clothing	91
941001	DS202一次性防护服 DS202 Light chemical protective clothing	91
941002	DS203一次性防护服 DS203 Light chemical protective clothing	91

足部防护系列
Foot Protection



93 - 98

订货号 Ref.	名称描述 Description	页码 Page
6993218	HYPALON SA -防弱酸防化靴 HYPALON SA - anti chemistry boots, concentrated and hot acids	98
BC0828101	GRANT QCK防静电保护足趾安全鞋 GRANT QCK anti-static,anti-impact safety shoes	97
BC0828102	GRANT QCSTK防静电保护足趾防刺穿猪皮鞋垫安全鞋 GRANT QCSTK anti-static,anti-impact,anti-perforation leather insole safety shoes	97
BC0919701	ECO QC防静电保护足趾安全鞋 ECO QC anti-static,anti-impact safety shoes	95
BC0919702	ECO CEH 保护足趾电绝缘安全鞋 ECO CEH anti-impact,electrical insulating safety shoes	95
BC0919703	ECO QCST防静电保护足趾防穿刺安全鞋 ECO QCST anti-static,anti-impact,anti-perforation safety shoes	95
BC0919801	TOCANO QC防静电保护足趾安全鞋 Tocano QC anti-static,anti-impact safety shoes	95

订货号 Ref.	名称描述 Description	页码 Page
BC0919802	TOCANO CEH 保护足趾电绝缘安全鞋 Tocano CEH anti-impact,electrical insulating safety shoes	95
BC0919803	TOCANOQCST防静电保护足趾防刺穿安全鞋 Tocano QCST anti-static,anti-impact,anti-perforation safety shoes	95
BC6240124	RALLYE QCSTF防静电保护足趾防刺穿人造毛内衬安全鞋, 棕色牛皮 RALLYE QCSTF anti-static,anti-impact,anti-perforation man-made fur lining safety boot;Brown leather upper	97
BC6240124B	RAYLLE QCSTFB防静电保护足趾防刺穿人造毛内衬安全鞋, 黑色牛皮 RALLYE QCSTFB anti-static,anti-impact,anti-perforation,man-made fur lining safety boot;black leather upper	97
BC6240225	COLT QC防静电保护足趾安全鞋 COLT QC anti-static,anti-impact safety shoes	96
BC6240226	COLT QCST防静电保护足趾防刺穿安全鞋 COLT QCST anti-static, anti-impact,anti-perforation safety shoes	96
BC6240470	GLOBE QC防静电保护足趾安全鞋 GLOBE QC anti-static,anti-impact safety shoes	96
BC6240471	GLOBE QCST防静电保护足趾防刺穿安全鞋 Globe QCST anti-static,anti-impact,anti-perforation safty shoes	96
BC6240475	GLOBE CEH保护足趾电绝缘安全鞋 GLOBE CEH anti-impact,electrical insulating safety shoes	96
BC6242121	RACING QC防静电保护足趾安全鞋 RACING QC anti-static,anti-impact safety shoes	96
BC6242122	RACING QCST防静电保护足趾防刺穿安全鞋 Racing QCST anti-static,anti-impact,anti-perforation safety shoes	96
BC6242124	RACING CEH 保护足趾电绝缘安全鞋 RACING CEH anti-impact,electrical insulating safety shoes	96
BC6245227	COLT CEH保护组织电绝缘安全鞋 COLT CEH anti-impact,electrical insulating safety shoes	96
RAC.2.SA	CHIMIE SA - 防强酸防化靴 CHIMIE SA - anti chemistry boots	98
SABJRAC2	FIREMAN SA - 防火丁睛橡胶靴 FIREMAN SA - fireproofed nitrile rubber boots	97
SP0919601	F601 保护足趾安全鞋 F601 Anti-impact safety shoes	95
SP0919602	F602 保护足趾防穿刺安全鞋 F602 Anti-impact Anti-perforation safety shoes	95
SP0919603	F603 保护足趾电绝缘安全鞋 F603 Anti-impact Electrical insulation safety shoes	95



订货号 Ref.	名称描述 Description	页码 Page
10 028 27	Miller MightyLite™ 坠落制动器 6.2米 Miller MightyLite™ Fall arrest block 6.2m	112
10 028 32	Miller 安全钩 Miller Karabiner	118
10 028 34	Miller 安全钩 Miller Karabiner	118
10 028 36	Miller 安全钩 Miller Karabiner	118
10 028 49	Miller Duraflex™ 全身安全带 中/大号 Miller Harness M/L	101
10 028 51	Miller 标准型全身安全带 中/大号 Miller Standard Harness M/L	102
10 028 53	Miller Duraflex™ 全身安全带 中/大号 Miller Harness M/L	101
10 028 57	Miller Duraflex™ 全身安全带 中/大号 Miller Harness M/L	101
10 028 62	Miller 定位腰带 Miller Positioning Belt M/L	117
10 028 68	MG100 MicroLoc 钢缆抓绳器 MG100 MicroLoc Cable Grab	115
10 028 71	Miller 坠落制动器 2.5米 Miller Fall arrest block 2.5m	111
10 028 75	Miller 抓绳器 Miller Rope grab	115
10 028 76	Miller 抓绳器 Miller Rope grab	116
10 028 81	Miller 系绳 Miller Lanyard	108
10 028 91	Miller 安全绳 10米 Miller Rope 10m	116
10 028 92	Miller 安全绳 20米 Miller Rope 20m	116
10 028 93	Miller 安全绳 30米 Miller Rope 30m	116
10 028 94	Miller 安全绳 40米 Miller Rope 40m	116
10 028 95	Miller 安全绳 50米 Miller Rope 50m	116
10 029 07	Miller 系绳 Miller Lanyard	107
10 029 17	Miller 吊带 0.8米 Miller Sling 0.8m	117
10 029 19	Miller 吊带 1.5米 Miller Sling 1.5m	117

订货号 Ref.	名称描述 Description	页码 Page
10 034 38	Miller RM 全身安全带 小/中号 Miller Harness S/M	104
10 043 24	Miller 安全钩 Miller Karabiner	118
10 045 12	Miller 安全绳 10.5毫米直径 Miller Rope dia 10.5mm	116
10 045 71	Miller MightyLite™ 坠落制动器 10米 Miller MightyLite™ Fall arrest block 10m	112
10 045 72	Miller MightyLite™ 坠落制动器 20米 Miller MightyLite™ Fall arrest block 20m	112
10 045 90	Miller 系带 Miller Lanyard	107
10 045 91	Miller 系绳 Miller Lanyard	107
10 045 95	Miller MightyLite™ 坠落制动器 40米 Miller MightyLite™ Fall arrest block 54m	112
10 050 41	Miller 三脚架 Miller Tripod 2.1m	120
10 050 42	Miller 绞盘 Miller Winch20m	120
10 053 18	Miller 系带 Miller Lanyard	105
10 053 25	Miller 系带 Miller Lanyard	105
10 060 26	Miller INDY 救援套件 Miller Rescue kit	120
10 061 00/10 061 01 /10 061 02	Miller MightyLite™ 坠落制动器 3.1米 Miller MightyLite™ Fall arrest block 3.1m	111
10 070 18	Polecat 安全坐带 Polecat Sit Harness	104
10 070 22	IBX2R 全身式安全带 IBX2R	104
10 070 46	Miller 担架 Miller Stretcher	120
10 082 82	Miller Titan™ 缓冲包 Miller Shock-absorbing pack	117
10 101 41	Miller 系绳 Miller Lanyard	108
10 102 52	RAM 救援坐带 RAM Sit Harness	104
10 118 90	Miller Titan™ 全身安全带 中/大号 Miller Harness M/L	102
10 118 91	Miller Titan™ 全身安全带 中/大号 Miller Harness M/L	102
10 118 94	Miller Titan™ 全身安全带 中/大号 Miller Harness M/L	102

订货号 Ref.	名称描述 Description	页码 Page
751K/UBLU	Miller 焊工工全身式安全带 Miller Welder Full-body Harness	119
8798B-SN	Miller Back Biter 系绳 1.8米 Miller Back Biter lanyard 1.8m	106
907K/6FTBL	Miller 焊工工缓冲系绳 1.8米 Miller Welder shock-absorbing lanyard 1.8m	119
913B-SN	Miller Back Biter 系绳 1.8米 Miller Back Biter lanyard 1.8m	106
CFL-2	Miller Black Rhino™ 坠落制动器 Miller Black Rhino™ Self-retracting lifeline 2.7m	114
DL-20	Miller 工作定位腰带 Miller Work positioning belt	117
DL-25	Miller 工作定位系绳 2米 Miller Work positioning lanyard 2m	117
DL-30	Sperian 全身安全带 Sperian Harness	103
DL-31	Sperian 全身安全带 Sperian Harness	103
DL-35	Sperian 全身安全带 Sperian Harness	103
DL-50	Miller 缓冲减震系绳 2米 Miller Shock absorbing lanyard 2m	107
DL-51	Miller 缓冲减震系绳 2米 Miller Shock absorbing lanyard 2m	107
DL-55	Miller 连接系绳 2米 Miller Shock absorbing lanyard 2m	108
DL-56	Miller 连接系绳 2米 Miller Shock absorbing lanyard 2m	108
MFL-1/6FT	Miller Turbolite™ 系列坠落制动器 Miller Turbolite™ Self-retracting Lifeline	109
MFL-2/6FT	Miller Turbolite™ 系列坠落制动器 Miller Turbolite™ Self-retracting Lifeline	109
MFL-3/6FT	Miller Turbolite™ 系列坠落制动器 Miller Turbolite™ Self-retracting Lifeline	109
MP20G/20FT	Miller Falcon™ 坠落制动器 6.2米 Miller Falcon™ fall arrest block 6.2m	113
MP30G/30FT	Miller Falcon™ 坠落制动器 10米 Miller Falcon™ fall arrest block 10m	113
MP50G/50FT	Miller Falcon™ 坠落制动器 15米 Miller Falcon™ fall arrest block 15m	113
MP65G/65FT	Miller Falcon™ 坠落制动器 20米 Milleralcon™ fall arrest block 20m	113
PFL-17/9FT	Miller Scorpion™ 坠落限制器 2.7米 Miller Scorpion™ Personal Fall Limiter 2.7m	110
RL175G/175FT	Miller MightyLite™ 坠落制动器 54米 Miller MightyLite™ Fall arrest block 41m	112

全国售后服务网络分布图

24 小时热线电话：400 820 2858

乌鲁木齐售后服务分中心

区域：新疆全境
地址：乌鲁木齐市西北路458号
科学大厦B座3201室

沈阳售后服务分中心

区域：辽宁、黑龙江、吉林、
河北、北京、天津、
山东、内蒙古东部
地址：沈阳市皇姑区明廉路30号1-16-1
传真：024-8672 2526

成都售后服务中心(授权)

区域：四川、重庆
地址：成都市桐梓林北路2号
凯莱帝景C-2-D

西安售后服务分中心

区域：陕西、甘肃、宁夏、
青海、山西、河南、
湖北、内蒙古西部
地址：西安市经济技术开发区
未央路125号第五国际大厦A807室

深圳售后服务分中心

区域：江西、湖南、广东、
贵州、云南、海南
地址：深圳市益田路与福华路交汇处
深圳国际商会中心2208室

上海售后服务及培训中心

区域：江苏、浙江、上海、
安徽、福建
地址：上海松江工业区美能达路312号





订购热线：400-600-7758

网 站：www.myehs.cn

订购热线: 400-600-7758
网 站: www.myehs.cn

斯博瑞安 (中国) 安全防护设备有限公司 SPERIAN PROTECTION (CHINA) CO.,LTD

公司总部 Head Office
上海市中山南二路1089号徐汇大厦19楼
19th Floor, Xuhuiyuan Building,
No. 1089 2nd South Zhongshan Road Shanghai, China
电话 (Tel) 86-21-6457 0608
传真 (Fax) 86-21-6457 2566 / 6457 5955
邮编 (Zip) 200030

北京办事处 Beijing Office
北京市朝阳区朝外大街22号泛利大厦1202室
Room 1202 Prime Tower NO. 22 Chao Wai Street,
Chaoyang District, Beijing
电话 (Tel) 86-10-6588 9629
传真 (Fax) 86-10-6588 5884
邮编 (Zip) 100020

深圳办事处 Shenzhen Office
深圳市益田路与福华三路交汇处深圳国际商会中心2208室
Room 2208, Shenzhen International Chamber of
Commerce Tower, Fuhua 3 Road, Futian, Shenzhen
电话 (Tel) 86-755-8221 0290
传真 (Fax) 86-755-8221 0287
邮编 (Zip) 518048

联络处 Contact number

成都 Chengdu 13518118806
昆明 Kunming 13888011632
重庆 Chongqing 13594058017

南京 Nanjing 13813880667
武汉 Wuhan 13986101129
苏州 Suzhou 13812797445

宁波 Ningbo 15825550016
乌鲁木齐 Urumqi 13809912890
西安 Xi'an 13891477844

福州 Fuzhou 13809541289
广州 Guangzhou 13922298834
长沙 Changsha 13469081801

深圳 Shenzhen 13922860155
珠海 Zhuhai 13603538553